

February 20, 2024
 PATTS College Of Aeronautics
 Lambo St. Brgy. San Dionisio, Paranaque City
 825-8823/825-8824, 0933-8120909

MODEL Qty
 KSM-SW25-6H1M32 4

AVIONICS LECTURE ROOM Area 48 sqm

ACU 1 2.5 HP Wall Mounted Regular		KSM-SW25-6H1M32			
Estimated Pipe Length = 27 ft					
Estimated Royal Cord Length = 32 ft					
Initial Charge					
Includes:					
Labor					
10ft Copper Tube					
10ft Royal Cord					
Outdoor Bracket (Wall)					
Consumables					
Installation Materials	Description	Qty	Price per qty	Subtotal	
Copper Tube	Ø 3/8 " x Ø 5/8"	17 ft	₱ 400.00/ft	₱ 6,800.00	
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Circuit Breaker waterproof	30A/1PH	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00	
					₱ 10,575.00
Estimated Charges					₱ 16,075.00

ACU 2 2.5 HP Wall Mounted Regular		KSM-SW25-6H1M32			
Estimated Pipe Length = 23 ft					
Estimated Royal Cord Length = 28 ft					
Initial Charge					
Includes:					
Labor					
10ft Copper Tube					
10ft Royal Cord					
Outdoor Bracket (floor)					
Consumables					
Installation Materials	Description	Qty	Price per qty	Subtotal	
Copper Tube	Ø 3/8 " x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00	
Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Circuit Breaker waterproof	30A/1PH	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00	
					₱ 8,575.00
Estimated Charges					₱ 14,075.00

POWERPLANT LECTURE ROOM Area 47 sqm

ACU 3 2.5 HP Wall Mounted Regular		KSM-SW25-6H1M32			
Estimated Pipe Length = 27 ft					
Estimated Royal Cord Length = 32 ft					
Initial Charge					
Includes:					
Labor					
10ft Copper Tube					
10ft Royal Cord					
Outdoor Bracket (Wall)					
Consumables					
Installation Materials	Description	Qty	Price per qty	Subtotal	
Copper Tube	Ø 3/8 " x Ø 5/8"	17 ft	₱ 400.00/ft	₱ 6,800.00	
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Circuit Breaker waterproof	30A/1PH	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00	
					₱ 10,575.00
Estimated Charges					₱ 16,075.00

ACU 4 2.5 HP Wall Mounted Regular**KSM-SW25-6H1M32**

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 28 ft

Initial Charge**P 5,500.00**

Includes:

Labor

10ft Copper Tube

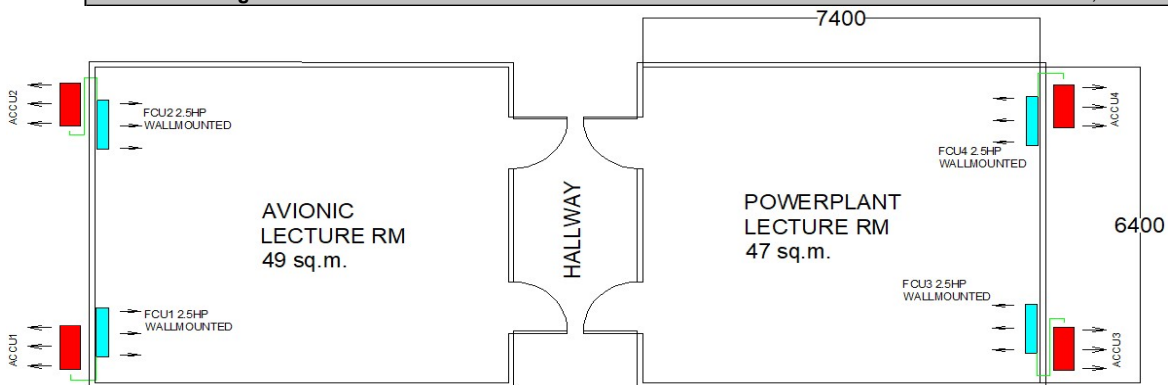
10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	13 ft	P 400.00/ft	P 5,200.00
Royal Cord (comm. wire)	18 ft	P 100.00/ft	P 1,800.00
Royal Cord (ACCU-Breaker)	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	5 ft	P 25.00/ft	P 125.00

P 8,575.00**Estimated Charges****P 14,075.00****Total Estimated Charges****P 60,300.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Expose Coppertube and wires in the area.
- 4 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 5 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 6 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformee:

Jeffrey Dadios

Field Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth ZamoraService Supervisor Shop and
Field Operation