

FANTASTIC GOOD FOOD, INC.
ATTN: MR. KELVIN PETER YU
UNIT 2616B SUNSHINE 100 CITY PLAZA, 4 PIONEER ST., MANDALUYONG CITY
TEL#: 0917-3060428

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-10WIFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 KJ/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	25,372.20	PHP	25,372.20
1	UNIT/S	MODEL: KSG-IWF-15WIFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 KJ/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	28,412.20	PHP	28,412.20
TOTAL UNIT COST					PHP	53,784.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	32,600.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	86,984.40

* OPTION 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KS-IW10-MCAI1201M32 KOLIN WALL MOUNTED CERTUS AI SERIES AIRCONDITIONER 9,800 KJ/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	30,995.00	19,556.20	PHP	19,556.20
1	UNIT/S	MODEL: KS-IW15-MCAI1201M32 KOLIN WALL MOUNTED CERTUS AI SERIES AIRCONDITIONER 12,880 KJ/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	33,995.00	21,836.20	PHP	21,836.20
TOTAL UNIT COST					PHP	41,392.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	32,600.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	74,592.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MARTIN MARCEL B. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-11-25-0778
REG-24%/7K/4K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



NOVEMBER 03, 2025

Fantastic Food, Inc

Unit 2616B Sunshine 100 City Plaza, 4 Pioneer St. Mandaluyong City

0917-3060428

MODEL	Qty
KSG-IWF-10Wfy8K1M32	1
KSG-IWF-15Wfy8K1M32	1

OPTION-PRIMUS

BEDROOM	Area	9 sqm
---------	------	-------

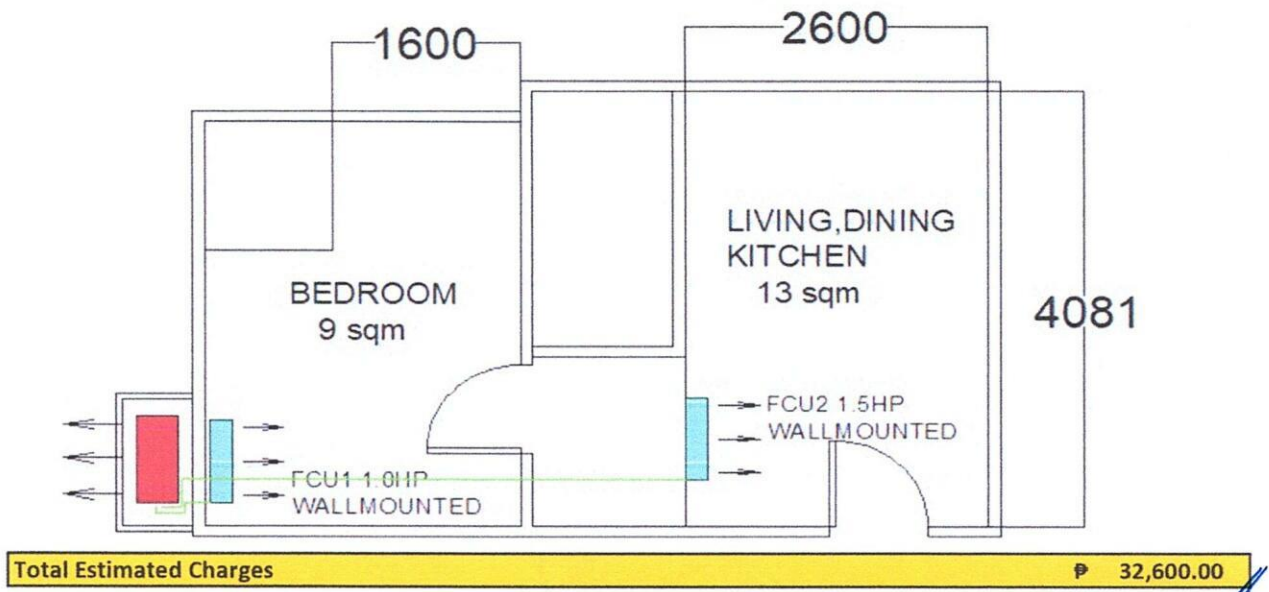
ACU 1	1.0 HP Wall Mounted Inverter	KSG-IWF-10Wfy8K1M32			
	Estimated Pipe Length =	13 ft			
	Estimated Royal Cord Length =	18 ft			
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Floor)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	3 ft	₱ 350.00/ft	₱ 1,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C	8 ft	₱ 100.00/ft	₱ 800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 'ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	20A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 3,450.00

Estimated Charges	₱ 10,950.00
-------------------	-------------

LIVING,DINING,KITCHEN	Area	13 sqm
-----------------------	------	--------

ACU 2	1.5 HP Wall Mounted Inverter	KSG-IWF-15Wfy8K1M32			
	Estimated Pipe Length =	27 ft			
	Estimated Royal Cord Length =	32 ft			
	Initial Charge				₱ 6,700.00
	Includes:				Less Outdoor Bracket
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	17 ft	₱ 350.00/ft	₱ 5,950.00
	Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	20A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Fabricated Outdoor Bracket	floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
	Drain pump		1 pc/s	₱ 2,950.00/pc	₱ 2,950.00
	Drain pump hose		5 ft	₱ 10.00/ft	₱ 50.00
					₱ 14,950.00

Estimated Charges	₱ 21,650.00
-------------------	-------------




Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit, fabricated Outdoor Bracket 2nd Layer.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**


Prepared by:


Jeffrey Dadios
Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation