

May 29, 2024

ERIK HO

Unit 3705 Bristol Tower Condo. Parkway Ave. Cor. Corporate Ave. Filinvest, Alabang

0917-7281668

lohuimin@gmail.com

MODEL	Qty
KSG-IWF-30Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	1
KSG-IWF-15Wfy8K1M32	1

LIVING/DINING	Area	46 sqm
----------------------	------	--------

ACU 1	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32
	Estimated Pipe Length = 30 ft	
	Estimated Royal Cord Length = 35 ft	
	Initial Charge	₱ 4,700.00
	Includes:	Less Outdoor Bracket
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
Installation Materials	Description	Qty Price per qty Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	20 ft ₱ 400.00/ft ₱ 8,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft ₱ 100.00/ft ₱ 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft ₱ 300.00
Outdoor bracket	Modified	1 pc/s ₱ 1,500.00/pc ₱ 1,500.00
Dismantle	1.0HP Wall Mounted	2 set ₱ 2,500.00/set ₱ 5,000.00
PVC blue	3/4" x 10'	2 pc/s ₱ 150.00/pc ₱ 300.00
		₱ 17,600.00

Estimated Charges	₱ 22,300.00
--------------------------	-------------

MASTER BEDROOM	Area	17 sqm
-----------------------	------	--------


ACU 2	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32
	Estimated Pipe Length = 20 ft	
	Estimated Royal Cord Length = 25 ft	
	Initial Charge	₱ 3,700.00
	Includes:	Less Outdoor Bracket
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
Installation Materials	Description	Qty Price per qty Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	10 ft ₱ 350.00/ft ₱ 3,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft ₱ 100.00/ft ₱ 1,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft ₱ 300.00
Outdoor bracket	Modified	1 pc/s ₱ 1,500.00/pc ₱ 1,500.00
Dismantle	1.5HP Wall Mounted	1 set ₱ 2,500.00/set ₱ 2,500.00
PVC blue	3/4" x 10'	2 pc/s ₱ 150.00/pc ₱ 300.00
		₱ 9,600.00

Estimated Charges	₱ 13,300.00
--------------------------	-------------

KIDS ROOM	Area	11 sqm
------------------	------	--------

ACU 3	1.5 HP Wall Mounted Inverter	KSG-IWF-15Wfy8K1M32
	Estimated Pipe Length = 14 ft	
	Estimated Royal Cord Length = 19 ft	
	Initial Charge	₱ 3,700.00
	Includes:	Less Outdoor Bracket
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
Installation Materials	Description	Qty Price per qty Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	4 ft ₱ 350.00/ft ₱ 1,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	9 ft ₱ 100.00/ft ₱ 900.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft ₱ 300.00
Outdoor bracket	Modified	1 pc/s ₱ 1,500.00/pc ₱ 1,500.00
Dismantle	1.5HP Wall Mounted	1 set ₱ 2,500.00/set ₱ 2,500.00
PVC blue	3/4" x 10'	2 pc/s ₱ 150.00/pc ₱ 300.00
		₱ 6,900.00

Estimated Charges	₱ 10,600.00
--------------------------	-------------

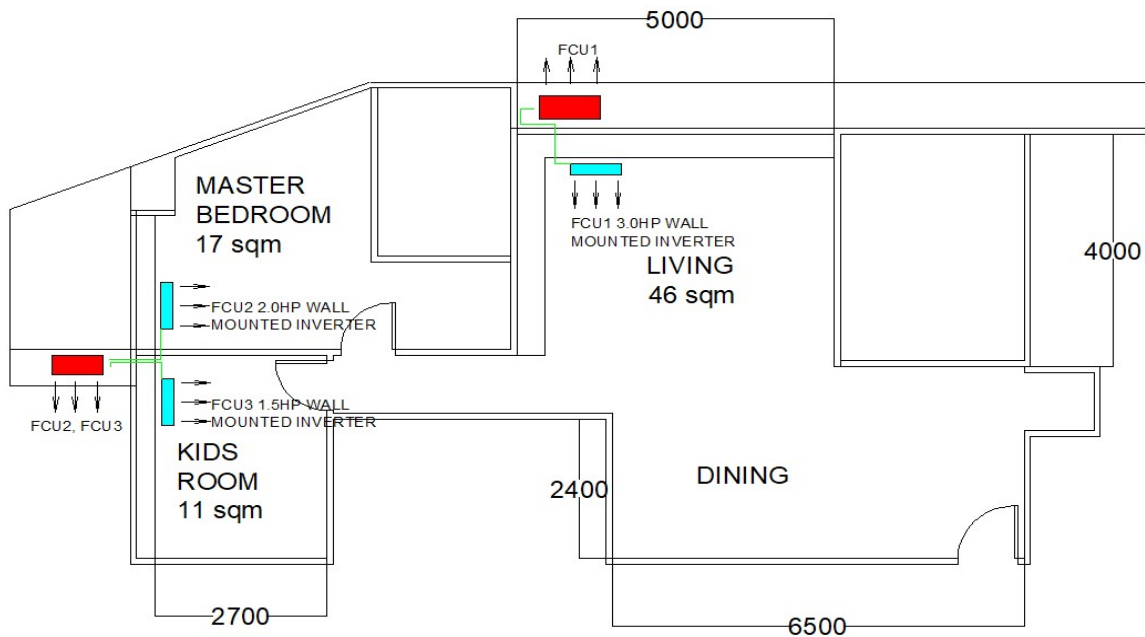

Total Estimated Charges

P 46,200.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Customer contractor/carpentry, need to open the cladding /existing coppertube for the lay out of new coppertube.
- 4 Expose coppertube, drainline and wires.
- 5 Use existing breaker. And Outdoor Bracket Modification onsite to fit the outdoor units.
- 6 working Days: Monday to Friday : 8am to 5pm, Parking for Confirmation. 4 pax. Need Working permit and hot works.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios
Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation