



To : Mr. Oliver M. Filoteo
Executive Vice President / COO
From : Quality Control Department
Re : Coffee / Tea Bar / Water Dispenser
Date : October 10, 2023
Reference no. : QCD-CB-BLC-8859T-23-10-001
Cc. : FDF. / A De Rivera /Dept. concern

Listed below are the specifications and parts of new Coffee Tea bar, Water dispenser received and inspected this October 9, 2023.

KCB-BLC-8859T

Details checking:

Model : KCB-BLC-8859T
Description : Bottom load water dispenser with coffee & tea bar
EAN Number : 4 806508 235946
P/O Number : KT-2306NB-01
Lot number : 013723001
Serial number range : 01372306-10001 to 11036 (1.036 units)
Printing Features : Good, clear, and correct

Inspected units: Kolin Serial number 01372306-10030, 10142, 10156 and 10192



Remarks:

First Shipment of this new model of Water Dispenser with Coffee and tea bar, Featuring matte black and brown color of casing with electric kettle and glass kettle.

Non-Conformance:

No AAA battery included on packaging.

Recommendations:

It is recommended for rework and wait for the instruction from higher management before the distribution to the dealers. Also subject for performance, evaluation and life testing.

Note: No sample unit received for comparison, all details reported are based on the actual unit

Packaging and Carton box checking:

Packaging Dimensions :	W x D x H Gross weight	410 x 380 x 860mm 16. kg.
Carton Box Dimensions :	W x D x H / Weight : Type / Thickness :	405 x 388 x 860 mm / 1585g. Double wall, BE flute / 5.0mm
Packaging Support:	Right side support : Left side support	Styrofoam / Thickness : 16mm Styrofoam / Thickness : 16mm
Accessories :	1) Owner's manual 2) Warranty card 3) Remote controller 4) Screw (5pcs) 5) Electric Kettle 6) Glass kettle	

Unit checking for outer part:

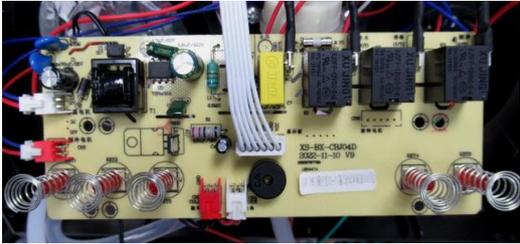
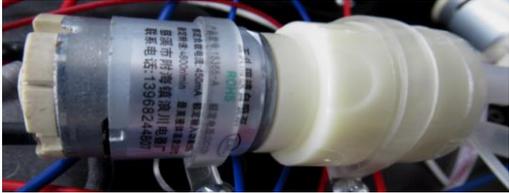
Specifications	Function	Boil / Tap / Cold
	Rated Voltage	230V ~
	Frequency	60 Hz
	Rated Cooling Current	0.75 A
	Rated Input Power / HOT	1350 W
	Rated Input Power / COLD	90 W
	Hot Water Capacity	8L/h 50-100°C
	Cold Water Capacity	2.0L/ h 5-10° C
	Refrigerant / Charge	R134a / 35g
Unit Dimension	W x D x H Net weight	375 x 345 x 810mm 15 kg
Appearance	Matte black color of metal casing, Brown color in front, cover by plastic glass, with top glass. Upper center KOLIN LOGO	
Top Glass	Dimensions	370 x 298mm (L x H)
Kolin Logo	Dimensions / cool gray color	67 x 24mm (W x H)
Cabinet for Bottle	White color / (Dimension)	345 x 298 x 570mm / Plastic Material
Upper Cabinet	White Plastic Material	275 x 110 x 133mm (Dimension)
LED Indicator Button icons	Keep warm / Cool / Heat / Pour Water / Power	
LED Display Panel indication	Dimension: (L x H)	275 x 70mm

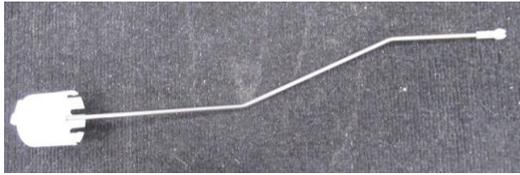
Power Cord	Black color / SJT 3/C 18AWG (0.824mm ²) 105°C / 500V (1665mm Length)
-------------------	--------------------------------------------------------------------------------------

Unit checking for inner part:

Compressor Motor:	Type: Model: Specifications: Manufacturer: Appearance: OLP: Relay:	HuaJun QD30LW 220-240V / R134a NingBO An uodan Machinery Co. LTD Black Coated Casing MP4SE134LL / 30-52 / 23F MS2-22B-01 / 23E
Control Module:	Control PCB :	XS-BX-CBJ04D 2020-11-10 (V9) / 2021-10-12 (V4)
	Display Panel Board:	18935797769 / XS-BX-CBJ12-D2 2020-02-24 (V7)
	Water Pump:	18365-A / 450Ma / 4800r/min / DC12V 5W / 35°C / 13968244807 / 2pcs
	Coupler:	13A / 125V / 10A / 250V / 13A / 250V~ KSD368-5
	Heater switch:	KCD3 / 16 (4)A 250VAC / 20A 125V AC
	Remote Control:	Black color / No Spec's
	Induction plate:	2 rounds of wire
	Water tank sensor:	
Condenser :	Color: Metal tubing: Dimensions: (L x H x W)	Black Coated Steel 1 row 16 lines Ø 5.0mm / 333 x 740 x 6mm
Cold Water Tank:	Appearance:	Stainless steel with Styrofoam cover
	Pump Hose : (1) Pump hose : (2)	Ø 9 x 210mm Ø 14 x 175mm
Water Tank Hose:	Dimension:	Ø 9 x 325mm Ø9 x 600mm
		Ø 13 x 330mm for Cold
		Ø 9 x 450mm (2pcs) for faucet
Stainless Pipe:	Appearance: Dimension:	Plastic and stainless materials Ø 6 x 510mm
Digital Display/ Faucet Mount:	Appearance: Dimension: (W x D x H)	Black & brown color / Plastic material 347 x 149 x 350mm

Inner Parts Overview

	<p>COMPRESSOR HuaJun QD30LW 220-240V / R134a</p>
	<p>COMPRESSOR OLP MP4SE134LL / 30-52 / 23F</p>
	<p>COMPRESSOR RELAY MS2-22B-01 / 23E</p>
	<p>CONTROL PCB XS-BX-CBJ04D 2020-11-10 (V9) / 2021-10-12 (V4)</p>
	<p>WATER PUMP 18365-A / 450Ma / 4800r/min / DC12V 5W / 35°C / 13968244807 / 2pcs</p>
	<p>DISPLAY PCB 18935797769 / XS-BX-CBJ12-D2 2020-02-24 (V7)</p>



PUMP PIPE
Plastic and Stainless Materials
Ø 6 x 510mm



COUPLER
13A / 125V / 10A / 250V / 13A / 250V~
KSD368-5



COLD WATER TANK STAINLESS



HEATER SWITCH
KCD3 / 16 (4)A 250VAC / 20A 125V AC



DIGITAL DISPLAY & FAUCET MOUNT
Electric kettle
And
Glass kettle



ACCESSORIES



POWER CORD

Black color / SJT 3/C 18AWG (0.824mm²)
105°C / 500V
(1665mm Lenght

For your reference,

Prepared by : Jayson L. Pagacita
Quality Control Staff

Reviewed by : Reiner S. Abaquita
Quality Engineer

Noted by : Alberto I. Francisco
QC, Asst. Supervisor

Approved by : Mr. Fernando D. Feliciano
Plant Operations Manager