



June 30, 2025

IMMACULATE CONCEPTION PARISH
ATTN: MR. JAYDAN VILORIA
64 PREMIUM ST., PROJECT 8, QUEZON CITY
TEL#: 0917-7011536

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLG-SF40-WBR6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 39,596 Kj/h (3.0TR) NON-INVERTER R-32 SINGLE PHASE	80,495.00	58,676.20	PHP	117,352.40
TOTAL UNIT COST					PHP	117,352.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	41,830.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	159,782.40

* OPTION 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	79,028.20	PHP	158,056.40
TOTAL UNIT COST					PHP	158,056.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	41,830.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	200,486.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-06-25-0506
EMF-24%/2.5K/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

KOLIN Philippines International Inc.
Survey Form (1ST WP/17)

No 003664

Customer Name : IMMACULATE CONCEPTION PRYCL Date : 6-X-21
 Address : 61 PREMIER ST. PRINCE & QUEEN CITY SJR No. : KOF327

Establishment Type : Residential ☐ Area Surveyed : MECHANICAL AREA
 Commercial ☒ Area Surveyed : MECHANICAL AREA

Recommended Product Model : KLG-1F40-54M32 (KLG-5F40-56M)
11.5/12.5TOL 11.5/12.5TOL

Cooling Capacity Computation

Floor Area : 77 sqm.
 Ceiling Height : 2 mtr. **note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.**

Floor Area :	<u>77</u>	x	550 Btu/h	<u>42350</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	
Window Direct Sunlight		x	20% - 50%	<u>8470</u> Btu/h
Total Cooling Capacity				<u>50820</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>50</u>	x	300 Btu/h	<u>15000</u> Btu/h
No. of Ordinary Light (<40w)	<u>16</u>	x	200 Btu/h	<u>3200</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer <u>HP</u>	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>18600</u> Btu/h

Recommended Cooling Capacity 69420 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- | | | |
|-----------------------------------|---|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☒ Yes ☐ Shop | ☒ Site ☐ No |
| 4. Service Ledge | ☒ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern;

EXPOSE COPPER TUBE IN THE AREA
FABRICATED OUTDOOR BRACKET WITH LEDGE
ON SITE
CUSTOMER WILL PROVIDE SCAFFOLDING
SET. CUSTOMER NEED TO PROVIDE POWER
SUPPLY AT THE OUTDOOR LOCATION/BRACKET.

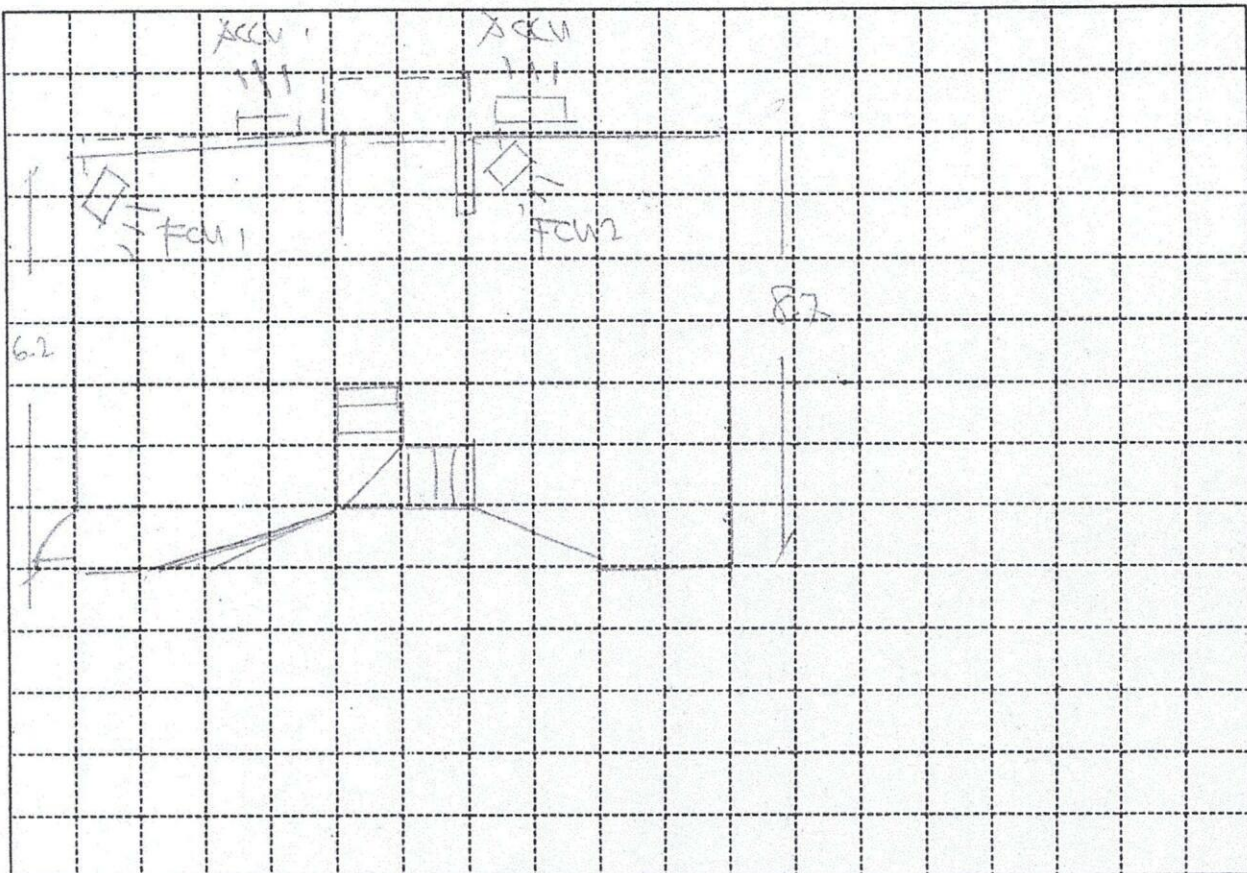

Indoor Unit Location :

LEFT CORNER OF AREA, 45 DEGREE

Outdoor Unit Location :

LEFT OF BALCONY

Pipe Length :

13 FT

Special Note :

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	3 FT	400	1200
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	10 FT	100	1000
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	7 FT	70	490
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) WITH LEDGE (Imptd. / Fabricated); (Floor / Wall)	1	6500	6500
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2" (3/4")	2 PCS	150	300
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Pump Hose WHITE 1/2	7 FT	25	175
Chipping Works mtr.			
Dismantling Fee (existing air-conditioner)			
Initial Charge			11000
TOTAL ESTIMATE		P	21,665 -

Note :

- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
- Survey fee will be deducted in the installation fee.

Prepared by:

JEFFREY D. S. S. S.
Signature Over Printed Name

Customer Conforms:

JEFFREY D. S. S. S.
Signature Over Printed Name

KOLIN Philippines International Inc.
Survey Form (240 4417)

No 003665

Customer Name : IMMEDIATE CONCRETE PAVEMENT Date : 6-25-25
 Address : 64 PREMIUM ST. PROBATE, QUEZON CITY SJR No. : 767321

Establishment Type : Residential ☐ Area Surveyed : _____
 Commercial ☒ Area Surveyed : ELECTRICAL XPS

Recommended Product Model : KLG 1420-561M31 (KLG 5270-561M)
INVERTIBLE NON-INVERTIBLE

Cooling Capacity Computation

Floor Area : 37 sqm.
 Ceiling Height : 3 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>37</u>	x	550 Btu/h	<u>41350</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	
Window Direct Sunlight		x	20% - 50%	<u>8470</u> Btu/h
Total Cooling Capacity				<u>50820</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>50</u>	x	300 Btu/h	<u>15000</u> Btu/h
No. of Ordinary Light (<40w)	<u>16</u>	x	200 Btu/h	<u>3200</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>18,600</u> Btu/h

Recommended Cooling Capacity 69420 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|---|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☒ Yes ☐ Shop | ☒ Site ☐ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension : _____

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern:

EXPLORE CORRELATION IF THE XPS
CHANGE FROM OTHER OUTDOOR LOCATION W/ LARGER
CUSTOMER WILL PROVIDE SCAFFOLDING, SETS
CUSTOMER NEED TO PROVIDE POWER CUP/VA AT
THE OUTDOOR LOCATION / BRACKET

PLEASE SEE REFERENCE
SURVEY FORM # 3664
ACH #

Indoor Unit Location : 45 DEGREE (LEFT) SIDE, BALCONY DOOR
Outdoor Unit Location : AT THE BACK
Pipe Length : 10 FT
Special Note :

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	7 FT	100	700
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	7 FT	30	210
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	1	1000	1000
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	650	650
Bracket (ODU) WITH LEDGE (Imptd. / Fabricated) : (Floor / Wall)	1		
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2" / 3/4"	21 FT	10	210
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Pump Hose WITH LEDGE	7 FT	25	175
Chipping Works mtr.			
Dismantling Fee (existing air-conditioner)			
Initial Charge			1100
TOTAL ESTIMATE		P 20,165-	

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

JEFFREY 02/20/05
Signature Over Printed Name

Customer Conforms:

JEFFREY 02/20/05
Signature Over Printed Name