

kolin

air conditioner

May 7, 2024

JUNBIN CAI
38 MARVEX DRIVE, BRGY A. BONIFACIO, QUEZON CITY
TEL#: 0917-111-7888

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

**OPTION 3

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	171,395.00	125,688.10 /	PHP	125,688.10
TOTAL UNIT COST					PHP	125,688.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	30,275.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	156,563.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOP NOTICE.

PRICES IS VAT INCLUSIVE.


INSTALLATION C/O AUTHORIZED SERVICE CENTER.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.


If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

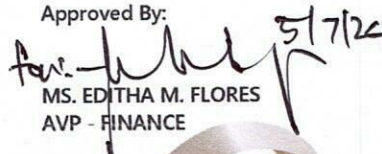

JANELLE S. LIM

KMI-ACCOUNTING ASSISTANT

Noted by;


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-04-24-0383

ECY-22%/8K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

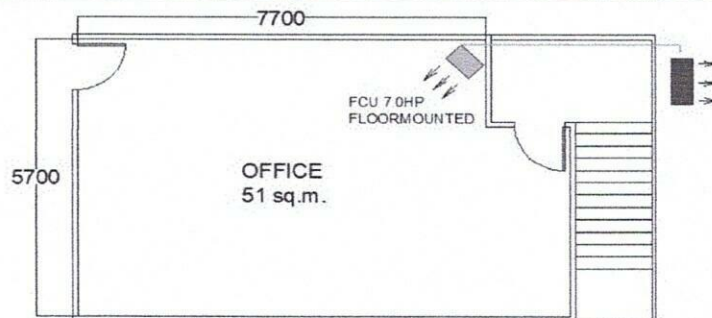
Fax: (632) 8852-2170 / (632) 8852-4792

ANNIVERSARY
EST. 1996

Bringing comfort to your home.

May 6, 2024
JUNBIN CAI
 38 Marvex Drive, Brgy A. Bonifacio, Quezon City
 0917-1117888

MODEL		QUANTITY	
KLG-IF70-5G1M32		1	
OFFICE		Area ≈ 51 sq.m	
ACU	7.0hp Floor mounted Inverter	KLG-IF70-5G1M32	
Estimated Pipe Length	:	23	ft
Estimated Royal Cord Length	:	30	ft
Initial Charge			P 14,000.00
Includes:			
Labor			
10ft Copper Tube			
10ft Royal Cord			
Indoor Bracket			
Other Consumables			
Additional Charges	Description	Unit	Price Per Unit
Copper Tube	3/4"x 3/8"	13 ft	P 600.00 / ft
Royal Cord	2.0mm2 x 4C	20 ft	P 100.00 / ft
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft
Circuit Breaker(60amp-1ph)	Nema waterproof	1 pc(s)	P 1,000.00 / pc
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc
Drain Hose	White -1/2"	5 ft	P 25.00 / ft
			P 125.00
Total Estimated Charges			P 30,275.00



Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Copper tube expose inside the area. Customer will provide scaffoldings.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, is not included in the scope of work of Kolin.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios
 Field Surveyor

Customer Conformer:

Reviewed by:

Engr. Kenneth Zamora
 Service Supervisor - Field and Shop Operation

Signature Over Printed Name