

kolin

air conditioner

November 29, 2023

ATTN: MR. ROMEO B. ROMEO
BLK. 9, LOT 30 AYALA WESTGROVE HEIGHTS, INCHICAN, SILANG CAVITE
Tel: 0956-874-9484

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	171,395.00	125,688.10	PHP	125,688.10
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	111,995.00	80,356.10	PHP	80,356.10
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	74,995.00	54,496.10	PHP	54,496.10
3	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	58,395.00	41,548.10	PHP	124,644.30
2	UNIT/S	MODEL: KSG-IWF-15WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	45,795.00	31,720.10	PHP	63,440.20
TOTAL UNIT COST					PHP	448,624.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	257,080.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	706,304.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE (Residential): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOP NOTICE.

PRICES IS VAT INCLUSIVE.

INSTALLATION C/O AUTHORIZED SERVICE CENTER.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph


Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City
www.kolinphil.com.ph
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792


kolin

air conditioner

Very Truly Yours,


GLORIA TIFFANY T. ABESAMIS
KMI-ASSISTANT

Noted By:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-11-23-1076-rev1
NG-22%/8k/7k/4k

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

23

NOVEMBER 28, 2023

ROMEO ROMEO

B9 L30, Ayala WestGrove Heights, Brgy Inchigan Silang Cavite

MODEL	Qty
KLG-IF70-5G1M32	1 ✓
KLG-IF40-5G1M32	1 ✓
KSG-IWF-30Wfy8K1M32	1 ✓
KSG-IWF-20Wfy8K1M32	3 ✓
KSG-IWF-15Wfy8K1M32	2 ✓

1ST FLOOR

HOBBY ROOM	Area	20 sqm
------------	------	--------

ACU 1	2.5HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32	
	Estimated Pipe Length = 27 ft		
	Estimated Royal Cord Length = 32 ft		
	Initial Charge		₱ 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	17 ft	₱ 350.00/ft	₱ 5,950.00
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Pipe Hanger	fabricated	1 pc/s	₱ 300.00/pc	₱ 300.00
Metal Clamp	3"	1 pc/s	₱ 120.00/pc	₱ 120.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 12,070.00 ✓

Estimated Charges	₱ 16,570.00
-------------------	-------------

BEDROOM	Area	17.5 sqm
---------	------	----------

ACU 2	1.5HP Wall Mounted Inverter	KSG-IWF-15Wfy8K1M32	
	Estimated Pipe Length = 46 ft		
	Estimated Royal Cord Length = 51 ft		
	Initial Charge		₱ 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	₱ 350.00/ft	₱ 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	₱ 350.00/pc	₱ 2,450.00
Metal Clamp	3"	9 pc/s	₱ 120.00/pc	₱ 1,080.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 21,830.00 ✓

Estimated Charges	₱ 26,330.00
-------------------	-------------

LIVING/FOYER	Area	62 sqm
---------------------	------	--------

ACU 3 7.0hp Floormounted Inverter KLG-IF70-5G1M32

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length = 34 ft

Initial Charge P 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	17 ft	P 600.00/ft	P 10,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	P 100.00/ft	P 2,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
				P 19,390.00

Estimated Charges	P 34,390.00
--------------------------	--------------------

KITCHEN/DINING	Area	42 sqm
-----------------------	------	--------

ACU 4 4.0hp Floormounted Inverter KLG-IF40-5G1M32

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

Initial Charge P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	33 ft	P 400.00/ft	P 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	P 100.00/ft	P 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	8 pc/s	P 120.00/pc	P 960.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
				P 27,350.00

Estimated Charges	P 38,350.00
--------------------------	--------------------

2ND FLOOR**BEDROOM2**

Area 22 sqm

ACU 5 2.0HP Wall Mounted Inverter**KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	43 ft P 350.00/ft	P 15,050.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft P 100.00/ft	P 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	1 pc/s P 150.00/pc	P 150.00
Metal Clamp	3"	9 pc/s P 120.00/pc	P 1,080.00
PVC blue	3/4" x 10'	2 pc/s P 150.00/pc	P 300.00
			P 25,830.00

Estimated Charges**P 30,330.00****BEDROOM3**

Area 21 sqm

ACU 6 2.0HP Wall Mounted Inverter**KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 60 ft

Estimated Royal Cord Length = 65 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	50 ft P 350.00/ft	P 17,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	55 ft P 100.00/ft	P 5,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	2 pc/s P 150.00/pc	P 300.00
Metal Clamp	3"	12 pc/s P 120.00/pc	P 1,440.00
PVC blue	3/4" x 10'	2 pc/s P 150.00/pc	P 300.00
			P 29,490.00

Estimated Charges**P 33,990.00**

Total Estimated Charges

P

257,860.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units base on floorplan.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Customer contractor need to perform or make a hole/coring in flooring for the lay out of coppertube and wires.
- 4 Working days: Monday to Saturday: 8am to 5 pm. Need working permit, and other requirement.
- 5 Need for site visit and markings with installer, for chipping works, drainline and hole in flooring.**
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios

Field Surveyor

Reviewed by:


Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation


Customer Confirmed:

ROMEO B. ROMEO

Signature Over Printed Name

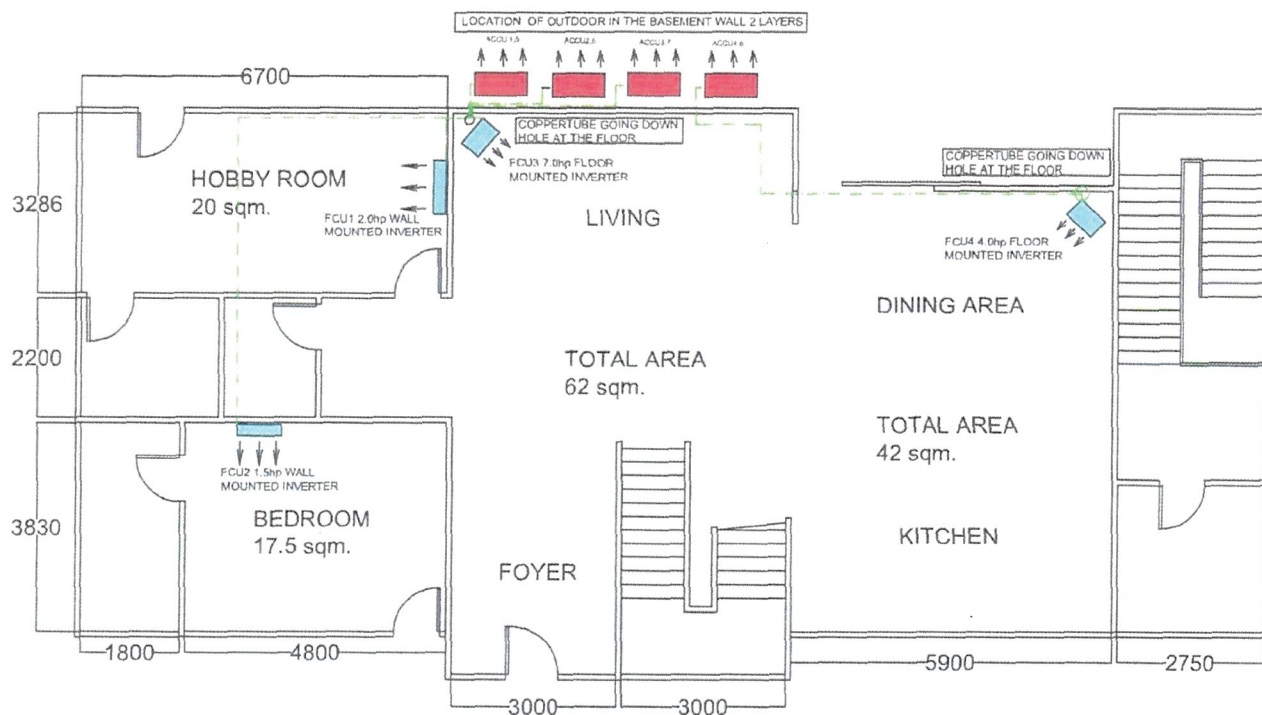

FIRST FLOOR

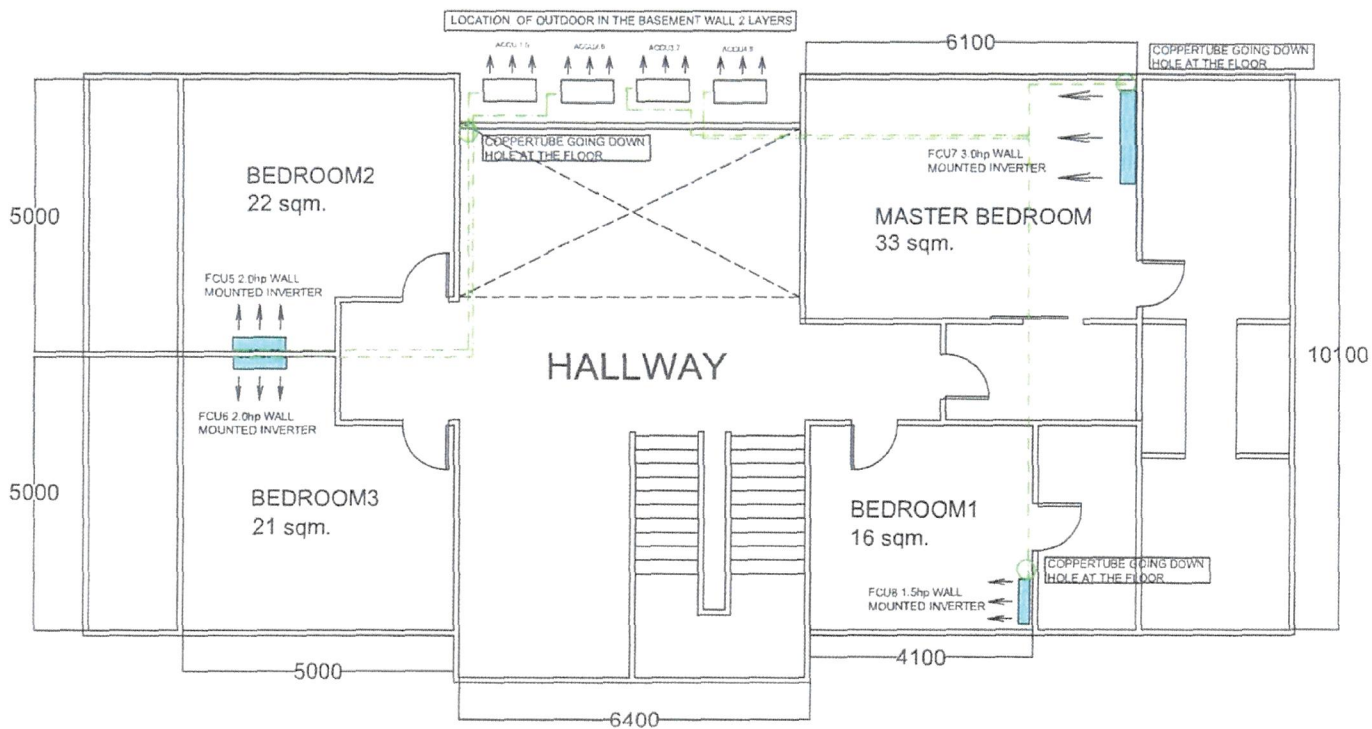

SECOND FLOOR