MODEL Qty KLG-IF40-5G1M32 1 **KAG-250WCINV** 1

G/L	DINING					Area	50	sqm	
1	4.0 HP Floor Standing Inverte	r	KLG-IF4	0-5	G1M32				-
	Estimated Pipe Length =	13 ft							
	Estimated Royal Cord Length =	: 20 ft							
	Initial Charge							₽	11,000.0
	Includes:								
	Labor								
	10ft Copper Tube								
	10ft Royal Cord								
	Indoor Bracket (FLOOR)								
	Consumables								
	Installation Materials	Description	Qty	Pri	ce per qty	Sı	ıbtotal		
	Copper Tube	Ø 3/8" x Ø 5/8"	3 ft	₱	400.00/ft	₽	1,200.00		
	Royal Cord (comm. wire)	2.mm2 x 4C	10 ft	₱	100.00/ft	₽	1,000.00		
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱	70.00/ft	₽	350.00		
	Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱	1,000.00/pc	₽	1,000.00		
	Outdoor Bracket (fabricated)	floor (hgt- 1meter)	1 pc/s	₱	2,500.00/pc	₽	2,500.00		
	PVC blue	3/4" x 10'	2 pc/s	₱	150.00/pc	₽	300.00		
	Dismantle	4.0hp	1 pc/s	₱	3,000.00/pc	₽	3,000.00		
	Drain Hose	White -1/2"	5 ft	₱	25.00/ft	₽	125.00	₽	9,475.00

ACU 2 2.5 HP Window type Inverter


Consumables

Initial Charge

Includes: Labor KAG-250WCINV

₱ 1,200.00

Estimated Charges

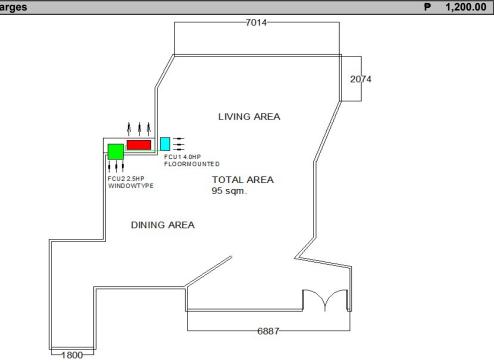

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Working Days: Monday to Friday, 8am to 5pm, Need working permit.
- 4 Need some manhole in outside ceiling and transfer power supply to outdoor location.
- 5 Customer Need to provide a deflector for ACU2, if error due to lack of ventilation.
- 6 KAG-250HME4 Dimension :(W x D x H) 660 x 700 x 428mm
- 7 Need to operate 2 units at the same time to avoid undercapacity.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Air conditioning drain line and Electrical power supply (feeder line) 220v/60hz/1ph, should be provided by customer's contractor.
- 10 Final charges will be based on actual installation.

Prepared by:	Customer Conformee:				
Jeoffrey Dadios					
Field Surveyor	Signature Over Printed Name				

Engr Kerneth Zamora Service Supervisor Shop and

Field Operation

Reviewed