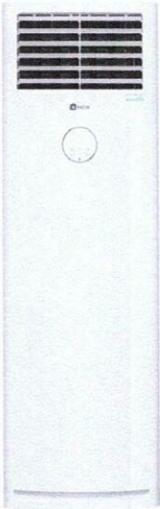


To : ALL DEPARTMENTS
 From : Sales Management Assistant
 Date : February 9, 2026
 Subject : NEW PRODUCT – 4.0hp (3 TR) FLOOR MOUNTED - FULL DC INVERTER
 Ref : SAL-SMA-26-2-147
 CC : DCO, File

This is to formally introduce the new addition to our product line-up for Light Commercial – Kolin's newest **4.0hp (3 TR) Floor Mounted - Full DC Inverter** with details below:

| PRODUCT PICTURE: INDOOR UNIT | SPECS | KL-IF40-G6H1M32 |
|--|---------------------------------|-------------------------------|
|  | SRP | 108,995 |
| | ORDERING DATE | February 16, 2026 |
| | Nominal Capacity | 4.0hp / 3 TR |
| | CSPF Rating | 5.37 |
| | Cooling Capacity | 38,466 (11,540 – 42,313) kJ/h |
| | Power Supply | 1Ph / 230 V / 60 Hz |
| | Power Input | 3,100 (620 – 3,720) W |
| | Input Current | 14 A |
| | Refrigerant (Type/Charge) | R32 / 2.1 kg |
| | Airflow (Hi/M/Lo) | 2,000 / 1,900 / 1,800 m3/h |
| | Sound Pressure Level (Hi /M/Lo) | 52 / 51 / 49 dB (A) |
| | Unit Dimension (WxDxH) | 595 x 411 x 1,882 mm |
| | Package Dimension(WxDxH) | 718 x 485 x 2,128 mm |
| | Unit Weight (Net / Gross) | 52 / 64 kg |

| PRODUCT PICTURE: OUTDOOR UNIT | SPECS | KL-IF40-G6H1M32 |
|---|--|----------------------|
|  | Unit Dimension (WxDxH) | 746 x 427 x 1,000 mm |
| | Package Dimension(WxDxH) | 810 x 483 x 1,080 mm |
| | Unit Weight (Net / Gross) | 53 / 58 kg |
| | Copper Tube (High / Low) | 3/8" / 5/8" |
| | Maximum Pipe Distance Between Indoor and Outdoor (Height / Length / Breaker) | 10m / 30m / 40 A |

FEATURES


- **Full DC Inverter** – this features a Full DC inverter system for maximum efficiency resulting to quieter, cost-saving, and fast cooling of indoor space.
- **High Cooling Capacity** – designed to rapidly cool down the room or space and switches to a more energy-efficient mode once the desired temperature is achieved.
- **Smart Controller** – this feature delivers easy control of the air conditioner functions with the aid of a WIFI connection.
- **X-Fan Function** – a self cleaning feature which ensures healthy and safer air by eliminating airborne contaminants and keeping the air conditioner clean and durable.
- **Self Diagnosis** – this feature displays error code automatically for easy maintenance and troubleshooting.
- **Four-way Swing** – it has a four-way swing in horizontal and vertical direction to distribute the cooled air to the room for a more comfortable cooling.
- **Remote and Soft Touch Panel** – allow users to adjust the air conditioner's settings, including temperature, mode, fan speed, and more, using a user-friendly soft-touch interface.
- **24-hour timer** – this allow the users to set a specific starting or shutdown time for the air conditioner. Users can set a starting time between 1 and 24 hours for automatically turning on and off the air conditioner.
- **LED Display** – displays the setting temperature to ensure accurate temperature control and monitoring.
- **R-32 Refrigerant** – a safer and more efficient, eco-friendly, and cost-effective refrigerant with zero ozone depletion and low global warming potential.

Please be guided accordingly.


Prepared by:

 8/9
Yvianne Mae B. Tejano
Sales Management Assistant

Noted by:

 8/9
Joanna Marie E. Dulog
Sales Supervisor

Approved by:

 8/9
Mr. Christian Keith V. Sarmiento
AVP – Sales

Approved by:

 9
Mr. Oliver M. Filoteo
President & CEO