

kolin

air conditioner

August 3, 2022

ATTN: MR. JONATHAN GO
540 WACK WACK RD. WACK WACK VILLAGE, MANDALUYONG CITY
Tel: 0917-327-0066

Dear Mr./Ms.,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are pleased to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KSM-IW25-9L1M-A KOLIN WALL MOUNTED APTUS SERIES AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER R-32	59,195	47,356.00	PHP	94,712.00
ESTIMATED COST OF INSTALLATION (please see attached)						30,440.00
OTHERS: DELIVERY CHARGE						600.00
TOTAL ESTIMATED COST OF THE PROJECT						125,752.00

TERMS OF PAYMENT

FULL PAYMENT ON UNIT BEFORE DELIVERY. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.
FOR INSTALLATION CHARGE, 50% DOWNPAYMENT BEFORE INSTALLATION. 50% AFTER COMPLETION OF THE PROJECT.

WARRANTY

FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR

NOTE: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
PRICES IS VAT INCLUSIVE

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

Gi 08/03/22
GLORIA TIFFANY T. ABESAMIS
KMI-ASSISTANT

Noted by:

[Signature]
MART NATHANIEL R. FLORES
KMI-ASSISTANT SUPERVISOR

Approved by:

[Signature]
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-08-22-0831

20%-DCG

Conforme: _____
SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 852-6473

Fax: (632) 852-2170 / (632) 852-4792

August 2, 2022
 JONATHAN GO
 540 WACK WACK Rd. WACK WACK VILLAGE MANDALUYONG CITY
 0917-3270066
 EMAIL.ADD

MODEL
 KSM-IW25-9L1M

QUANTITY
 2

BEDROOM Area ≈ 31.29 sqm.

ACU1 2.5 Hp Wall Mounted Inverter KSM-IW25-9L1M

Estimated Pipe Length : 26 ft
 Estimated Royal Cord Length : 33 ft

Initial Charge P 5,500.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Circuit Breaker (30A)
 Outdoor Bracket WALL
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4" x 1/2"	16 ft	P 400.00 / ft	P 6,400.00
Royal Cord	2.mm2 x 4C	23 ft	P 50.00 / ft	P 1,150.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00

P 8,145.00

Estimated Charges P 13,645.00

DEN Area ≈ 33.46 sqm.

ACU2 2.5 Hp Wall Mounted Inverter KSM-IW25-9L1M

Estimated Pipe Length : 33 ft
 Estimated Royal Cord Length : 40 ft

Initial Charge P 5,500.00


Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Circuit Breaker (30A)
 Outdoor Bracket WALL
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4" x 1/2"	23 ft	P 400.00 / ft	P 9,200.00
Royal Cord	2.mm2 x 4C	30 ft	P 50.00 / ft	P 1,500.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00

P 11,295.00

Estimated Charges P 16,795.00

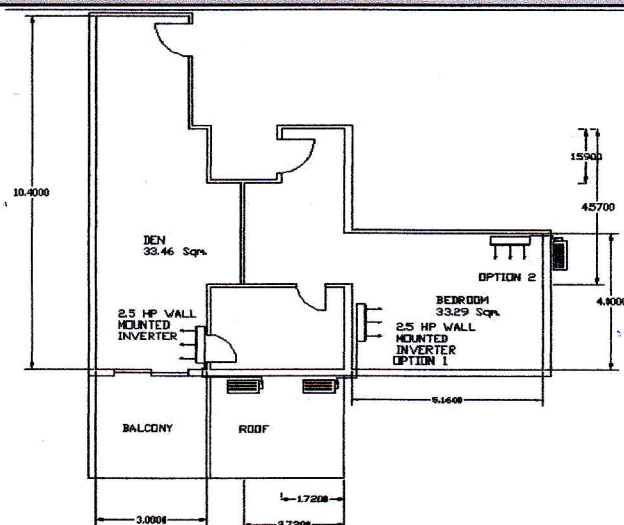

Total Estimated Charges

P 30,440.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were based on floor plan only.
- 2 The location of aircon in bedroom is two option.
- 3 Mechanical Plans, Permits, Electrical permits not included.
- 4 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 5 Electrical power supply (feeder line) is not included in the scope of work of Kolin.
- 6 Outdoor unit requires 220V / 3 phase / 60 Hz power supply.
- 7 Final charges will be based on actual installation.

Prepared by:

Customer Conforme:

Rodolfo dela Cruz Jr.

Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Lamora

Service Supervisor