

July 13, 2023

ATTN: MR. ROMEO B. ROMEO
L-30, B-9, AYALA WESTGROVE HEIGHTS, INCHICAN, SILANG CAVITE
Tel: 0956-874-9484

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	171,395.00	130,688.10	PHP	130,688.10
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	111,995.00	85,356.10 7	PHP	85,356.10
1	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	74,995.00	54,496.10 7	PHP	54,496.10
3	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	58,395.00	41,548.10 7	PHP	124,644.30
2	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	45,795.00	31,720.10 7	PHP	63,440.20
TOTAL UNIT COST					PHP	458,624.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	152,430.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	611,654.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE (Residential): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOP NOTICE.

PRICES IS VAT INCLUSIVE.

INSTALLATION C/O AUTHORIZED SERVICE CENTER.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph



Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City


www.kolinphil.com.ph

Tel.: (632) 8852-6473


Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

Very Truly Yours,


GLORIA TIFFANY T. ABESAMIS
KMI-ASSISTANT

Noted By:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-07-23-0617
NG-22%/3k/2k/4k

Approved By:


MS. LEDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME



Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

JULY 12, 2023

ROMEO ROMEO

B9 L30, Ayala Westfroe Heights, Brgy. Inchigan, SILANG, Cavite

MODEL	Qty
KLG-IF70-5G1M32	1 /
KLG-IF40-5G1M32	1 /
KSG-IWF-30WFY8K1M32	1 /
KSG-IWF-20WFY8K1M32	3 /
KSG-IWF-15WFY8K1M32	2 /

1ST FLOOR

HOBBY ROOM	Area	20 sqm
------------	------	--------

ACU 1	2.5HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32	
	Estimated Pipe Length = 33 ft		
	Estimated Royal Cord Length = 40 ft		
	Initial Charge		P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	P 100.00/ft	P 3,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	P 60.00/ft	P 240.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6"	5 pc/s	P 350.00/pc	P 1,750.00
Pipe Hanger	fabricated	3 pc/s	P 300.00/pc	P 900.00
Metal Clamp	3"	3 pc/s	P 120.00/pc	P 360.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 15,625.00

Estimated Charges	P 20,125.00
-------------------	-------------

BEDROOM	Area	17.5 sqm
---------	------	----------

ACU 2	1.5HP Wall Mounted Inverter	KSG-IWF-15WFY8K1M32	
	Estimated Pipe Length = 27 ft		
	Estimated Royal Cord Length = 34 ft		
	Initial Charge		P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	17 ft	P 350.00/ft	P 5,950.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	P 100.00/ft	P 2,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	P 60.00/ft	P 240.00
Circuit Breaker waterproof	20A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6"	2 pc/s	P 350.00/pc	P 700.00
Pipe Hanger	fabricated	3 pc/s	P 300.00/pc	P 900.00
Metal Clamp	3"	3 pc/s	P 120.00/pc	P 360.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 11,875.00

Estimated Charges	P 16,375.00
-------------------	-------------

LIVING/FOYER		Area	62 sqm
--------------	--	------	--------

ACU 3 7.0hp Floormounted Inverter **KLG-IF70-5G1M32**
 Estimated Pipe Length = 23 ft
 Estimated Royal Cord Length = 30 ft
Initial Charge P 15,000.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	13 ft	P 600.00/ft	P 7,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	P 100.00/ft	P 2,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	4 ft	P 70.00/ft	P 280.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 11,405.00

Estimated Charges	P 26,405.00
--------------------------	--------------------

KITCHEN/DINING		Area	42 sqm
----------------	--	------	--------

ACU 4 4.0hp Floormounted Inverter **KLG-IF40-5G1M32**
 Estimated Pipe Length = 27 ft
 Estimated Royal Cord Length = 34 ft
Initial Charge P 12,000.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	17 ft	P 400.00/ft	P 6,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	P 100.00/ft	P 2,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	4 ft	P 70.00/ft	P 280.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 350.00/pc	P 700.00
Pipe Hanger	fabricated	3 pc/s	P 300.00/pc	P 900.00
Metal Clamp	3"	3 pc/s	P 120.00/pc	P 360.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 17,765.00

Estimated Charges	P 29,765.00
--------------------------	--------------------

2ND FLOOR

BEDROOM2		Area	22 sqm
----------	--	------	--------

ACU 5 2.0HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**
 Estimated Pipe Length = 23 ft
 Estimated Royal Cord Length = 30 ft
Initial Charge P 4,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	13 ft	P 350.00/ft	P 4,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	P 100.00/ft	P 2,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	P 60.00/ft	P 240.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 350.00/pc	P 1,050.00
Pipe Hanger	fabricated	3 pc/s	P 300.00/pc	P 900.00
Metal Clamp	3"	3 pc/s	P 120.00/pc	P 360.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 10,425.00

Estimated Charges	P 14,925.00
--------------------------	--------------------

BEDROOM3	Area	21 sqm
-----------------	-------------	---------------

ACU 6 2.0HP Wall Mounted Inverter **KSG-IWF-20WY8K1M32**

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 30 ft

Initial Charge **₱ 4,500.00**

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	13 ft	₱ 350.00/ft	₱ 4,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	₱ 100.00/ft	₱ 2,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	₱ 60.00/ft	₱ 240.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6"	3 pc/s	₱ 350.00/pc	₱ 1,050.00
Pipe Hanger	fabricated	3 pc/s	₱ 300.00/pc	₱ 900.00
Metal Clamp	3"	3 pc/s	₱ 120.00/pc	₱ 360.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 10,425.00

Estimated Charges	₱ 14,925.00
--------------------------	--------------------

MASTER BEDROOM	Area	33 sqm
-----------------------	-------------	---------------

ACU 7 3.0HP Wall Mounted Inverter **KSG-IWF-30WY8K1M32**

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length = 27 ft

Initial Charge **₱ 5,500.00**

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	10 ft	₱ 400.00/ft	₱ 4,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	17 ft	₱ 100.00/ft	₱ 1,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	₱ 60.00/ft	₱ 240.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6"	2 pc/s	₱ 350.00/pc	₱ 700.00
Pipe Hanger	fabricated	3 pc/s	₱ 300.00/pc	₱ 900.00
Metal Clamp	3"	3 pc/s	₱ 120.00/pc	₱ 360.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 9,225.00

Estimated Charges	₱ 14,725.00
--------------------------	--------------------

BEDROOM1	Area	15.8 sqm
-----------------	-------------	-----------------

ACU 8 1.5HP Wall Mounted Inverter **KSG-IWF-15WY8K1M32**

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length = 34 ft

Initial Charge **₱ 4,500.00**

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	17 ft	₱ 350.00/ft	₱ 5,950.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	₱ 100.00/ft	₱ 2,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	4 ft	₱ 60.00/ft	₱ 240.00
Circuit Breaker waterproof	20A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6"	1 pc/s	₱ 350.00/pc	₱ 350.00
Pipe Hanger	fabricated	1 pc/s	₱ 300.00/pc	₱ 300.00
Metal Clamp	3"	1 pc/s	₱ 120.00/pc	₱ 120.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 10,685.00

Estimated Charges	₱ 15,185.00
--------------------------	--------------------

Total Estimated Charges

P 152,430.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units base on floorplan.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not part of installation scope of work.
- 4 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 5 **Final charges will be based on actual installation.**

Prepared by:


Jeffrey Dadios
Field Surveyor

Customer Conformer:


Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

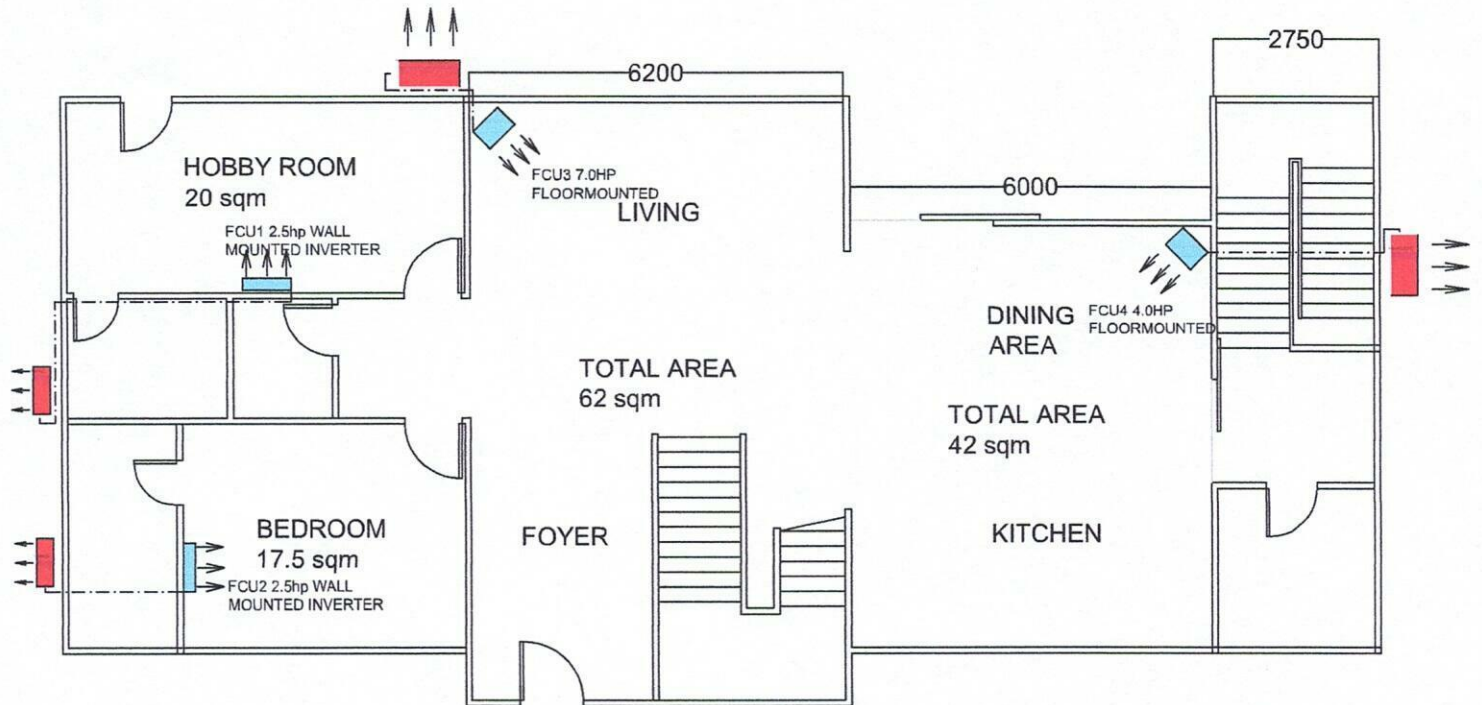

FIRST FLOOR

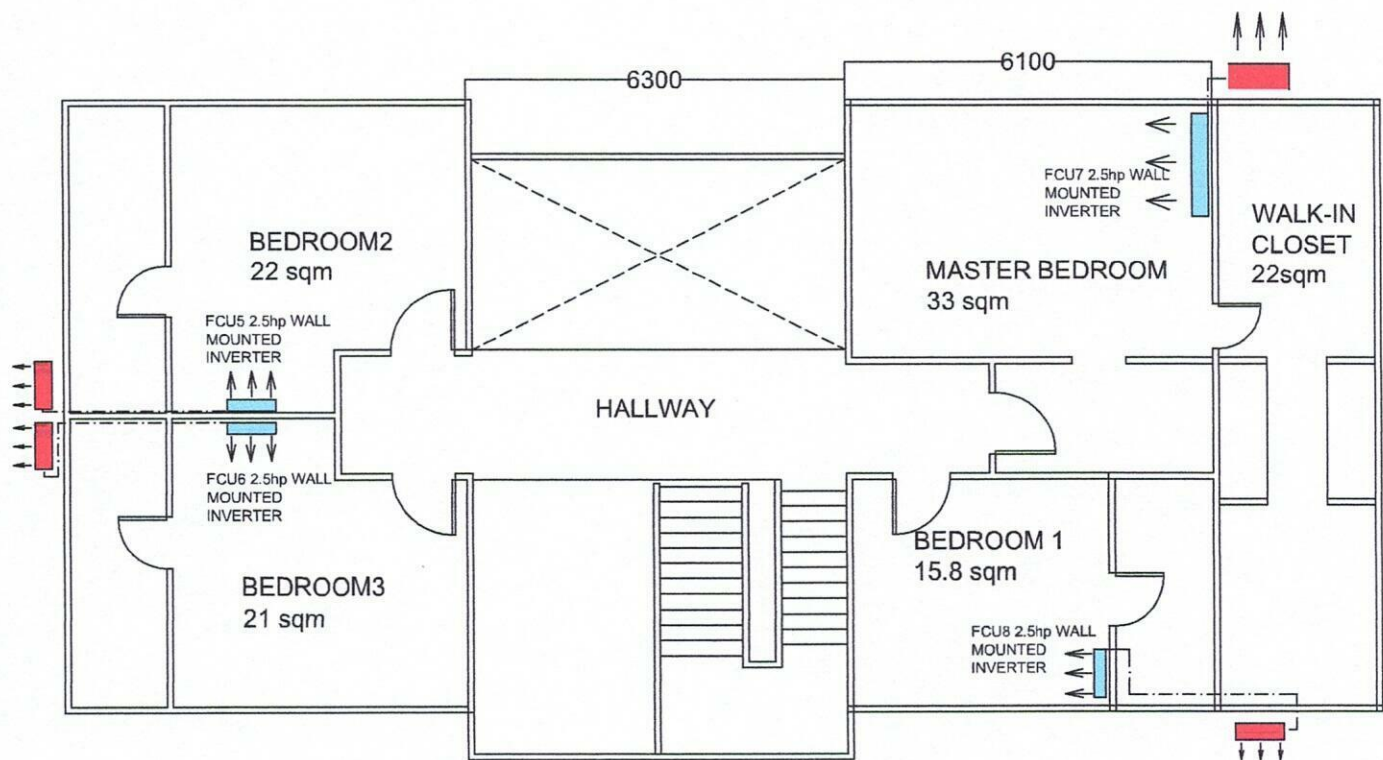

SECOND FLOOR