


MODEL	KLM-SS40-4F1M	KLM-SS70-4F3M	KLM-IS40-3D1M	KLM-IS70-3D3M
Power Supply	1 PH / 230 V / 60 Hz	3 PH / 230 V / 60 Hz	1 PH / 230 V / 60 Hz	3 PH / 230 V / 60 Hz
Nominal Capacity	4.0 hp / 3 TR	7.0 hp / 5 TR	4.0 hp / 3 TR	7.0 hp / 5 TR
Cooling Capacity	37,982 kJ/h	61,193 kJ/h	11,495 - 37,980 kJ/h	19,100 - 63,523 kJ/h
Rated Current	16.0 A	24.6 A	5.1 - 17.2 A	5.5 - 18.2 A
Rated Power	3642 W	5666 W	1,200 - 3,770 W	1,950 - 5,990 W
EER	10.4 kJ/hW	10.8 kJ/hW	9.6 - 10.1 kJ/hW	9.8 - 10.6 kJ/hW
Refrigerant (Type/Charge)	R-410A / 2,500 g	R-410A / 4,100 g	R-410a / 2,800 g	R-410a / 4,050 g
INDOOR UNIT				
Airflow (Hi/Mi/Lo)	1901/1430/1306 m³/h	1800/1600/1400 m³/h	2000 / 1700 / 1450 m³/h	1756 / 1428 / 1309 m³/h
Sound Level (Hi/Mi/Lo)	52.8/46.2/44.9 dB(A)	53.5/49.2/48.6 dB(A)	54.4 / 48.4 / 46 dB(A)	50.3/ 46.6 / 42.3 dB(A)
Front Panel Dimension (WxDxH)	950 x 950 x 55 mm	950 x 950 x 55 mm	950 x 950 x 55 mm	950 x 950 x 55 mm
Unit Dimension (WxDxH)	840 x 840 x 287 mm	840 x 840 x 287 mm	840 x 840 x 245 mm	840 x 840 x 287 mm
Packaging Dimension (WxDxH)	955 x 955 x 292 mm	955 x 955 x 292 mm	900 x 900 x 257 mm	900 x 900 x 292 mm
Unit Weight (Net / Gross)	30.3 / 34.0 kg	30.4 / 35.3 kg	25.0 / 30.0 kg	29.0 / 33.3 kg
OUTDOOR UNIT				
Unit Dimension (WxDxH)	946 x 410 x 810 mm	952 x 415 x 1333 mm	946 x 410 x 810 mm	952 x 415 x 1333 mm
Packaging Dimension (WxDxH)	1090 x 500 x 875 mm	1095 x 495 x 1480 mm	1090 x 500 x 875 mm	1095 x 495 x 1400 mm
Unit Weight (Net / Gross)	67.2 / 73.0 kg	109.1 / 121.6 kg	69.0 / 75.0 kg	104 / 116 kg
Copper Tube Size				
Low Side	Ø 3/4"	Ø 3/8"	Ø 5/8"	Ø 3/4"
High Side	Ø 3/8"	Ø 7/8"	Ø 3/8"	Ø 3/8"
Maximum Pipe Distance Between Indoor and Outdoor				
Height	10 m	10 m	10 m	10 m
Length	30 m	30 m	30 m	30 m
Circuit Breaker	40 A	40 A / 3 PH	40 A	40 A / 3 PH

***Product features and specifications are subject to change without prior notice

NON-INVERTER

KLM-SS40-4F1M

KLM-SS70-4F3M

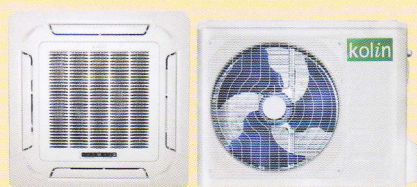

INVERTER

KLM-IS40-3D1M

KLM-IS70-3D3M



CEILING CASSETTE

FEATURES FOR CEILING CASSETTE

- 360 Degrees Air Discharge Panel
- Built-in Water Drain Pump
- Self-Diagnostic Error

kolin
air conditioner

works
for
years

SERVICE CENTERS

HEAD OFFICE

Kolin Bldg.
1854 Sta. Rita St., Guadalupe
Nuevo, Makati City, 1212
(632) 8852 - 6868

PAMPANGA

LRK Commercial Bldg., Jose Abad Ave.,
Lagundi, Mexico, Pampanga
(045) 455 - 2934

DAGUPAN

#107 Caranglaan District,
Dagupan City
(075) 523 - 2832

BACOLOD

Door #A-2 & A-3 UTC Bldg.,
Alunan St., Brgy. Singang,
Bacolod City
(034) 433 - 0031

ILOILO

Door #4, D' Appliance
Arcader, South Fundidor,
Molo, Iloilo City
(033) 336 - 1970

CEBU

Unit #6A, Geson Bldg.,
D. Jakosalem cor
F. Ramos Sts., Cebu City
(032) 253 - 9997 / (032) 253 - 7944

DAVAO

Door #5 Belle Fran Arcade,
E. Palma Gil St.,
Bo. Obrero, Davao City
(082) 227 - 7063

CAGAYAN DE ORO

Door #3 De Oro Land Bldg.,
Julio Pacana St., Puntod,
Cagayan de Oro City
(088) 856 - 4672

OVER 120 AUTHORIZED SERVICE CENTERS NATIONWIDE