

January 26, 2023

MARE VIA

YOYOTA ASIA KATIPUNAN AVE CULTURAL CENTER DELIMAN QUEZON CITY.

EMAIL.ADD

MODEL	QUANTITY
KLG-IF40-5G1M32	2
KLG-IF70-5G1M32	1

RESTAURANT	Area	≈ 133 sqm.
------------	------	------------

ACU 1	4.0 HP FLOOR MOUNTED INVERTER	KLG-IF40-5G1M32
	Estimated Pipe Length : 66 ft	
	Estimated Royal Cord Length : 73 ft	
	Initial Charge	P 11,000.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Indoor Bracket floor	
	Other Consumables	
	Additional Charges	Description Unit Price Per Unit Subtotal
	Copper Tube	5/8" x 3/8" 56 ft P 400.00 / ft P 22,400.00
	Royal Cord	2.mm2 x 4C 63 ft P 100.00 / ft P 6,300.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C 7 ft P 70.00 / ft P 490.00
	Outdoor Bracket Fabricated	wall 1 pcs P 6,500.00 / pcs P 6,500.00
	Circuit Breaker	40A 1 pcs P 1,000.00 / pcs P 1,000.00
	Duoble Insulation	2 1/8"x3/4"x6 10 pcs P 350.00 / pcs P 3,500.00
	Drain Hose White	White 1/2" 7 ft P 25.00 / ft P 175.00
		P 40,365.00


Estimated Charges	P 51,365.00
--------------------------	--------------------

ACU 2	4.0 HP FLOOR MOUNTED INVERTER	KLG-IF40-5G1M32
	Estimated Pipe Length : 82 ft	
	Estimated Royal Cord Length : 89 ft	
	Initial Charge	P 11,000.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Indoor Bracket floor	
	Other Consumables	
	Additional Charges	Description Unit Price Per Unit Subtotal
	Copper Tube	5/8" x 3/8" 72 ft P 400.00 / ft P 28,800.00
	Royal Cord	2.mm2 x 4C 79 ft P 100.00 / ft P 7,900.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C 7 ft P 70.00 / ft P 490.00
	Outdoor Bracket Fabricated	wall 1 pcs P 6,500.00 / pcs P 6,500.00
	Circuit Breaker	40A 1 pcs P 1,000.00 / pcs P 1,000.00
	Duoble Insulation	2 1/8"x3/4"x6 13 pcs P 350.00 / pcs P 4,550.00
	Drain Hose White	White 1/2" 7 ft P 25.00 / ft P 175.00
		P 49,415.00

Estimated Charges	P 60,415.00
--------------------------	--------------------

ACU 3	7.0 HP FLOOR MOUNTED INVERTER	KLG-IF70-5G1M32
	Estimated Pipe Length : 98 ft	
	Estimated Royal Cord Length : 105 ft	
	Initial Charge	P 14,000.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Indoor Bracket floor	
	Other Consumables	
	Additional Charges	Description Unit Price Per Unit Subtotal
	Copper Tube	5/8" x 3/8" 88 ft P 600.00 / ft P 52,800.00
	Royal Cord	2.mm2 x 4C 95 ft P 100.00 / ft P 9,500.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C 7 ft P 70.00 / ft P 490.00
	Outdoor Bracket Fabricated	wall 1 pcs P 6,500.00 / pcs P 6,500.00
	Circuit Breaker	60A 1 pcs P 1,000.00 / pcs P 1,000.00
	Duoble Insulation	2 1/8"x3/4"x6 15 pcs P 350.00 / pcs P 5,250.00
	Drain Hose White	White 1/2" 7 ft P 25.00 / ft P 175.00
		P 75,715.00

Estimated Charges	P 80,715.00
--------------------------	--------------------

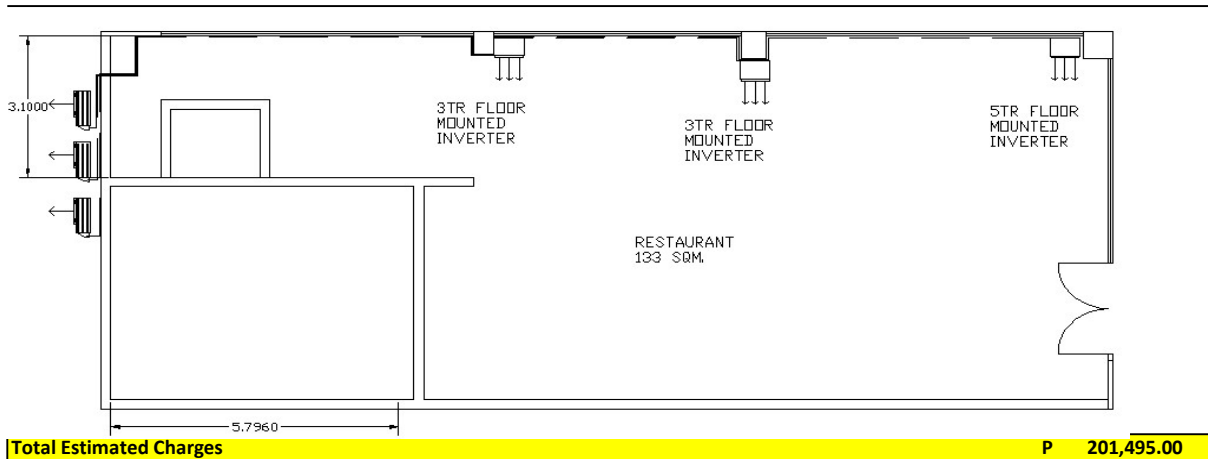

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:


- 1 Location of indoor and outdoor units were based on floor plan. For approval by customer
- 2 AC drain line will be tapped to the nearest drain provision.
- 3 If the location of aircon is approve need to set a meeting for the drain line.
- 4 Working days: Monday to Saturday, 8am- 5pm. Need permit and gatepass. With parking.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Electrical power supply (feeder line) is not included in the scope of work of Kolin.
- 8 Outdoor unit requires 220V / 1 phase / 60 Hz power supply.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Customer Conforme:

Rodolfo dela Cruz Jr.
Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor