

INVERTER

KLM-IF70-3D3M
KLG-IF70-2C1M
KLG-IF40-2C1M



MODEL	KLG-SF40-3D1M	KLG-SF70-4D3M	KLG-IF40-2C1M	KLG-IF70-2C1M	KLM-IF70-3D3M
Nominal Capacity	4.0 hp / 3 TR	7.0 hp / 5 TR	4.0 hp / 3 TR	7.0 hp / 5 TR	7.0 hp / 5 TR
Cooling Capacity	37,980 kJ/h	54,720 kJ/h	12,945-43,150 kJ/h	18,600-62,000 kJ/h	19,300-64,355 kJ/h
Power Supply	1PH/230V/60HZ	3PH/220V/60HZ	1PH/230V/60HZ	1PH/230V/60HZ	3PH/230V/60HZ
Rated Current	19 A	25 A	(4.5-15) A	(7.5-23) A	(5.1-16.2) A
Rated Power	3850 W	5570 W	(1,200-3,400) W	(1,850-5,850) W	(1,900-5,770) W
EER	9.9 kJ/hW	9.8 kJ/hW	(10.79-12.7) kJ/hW	(10-10.6) kJ/hW	(10.16-11.1) kJ/hW
Refrigerant	R-410A	R-410A	R-410A	R-410A	R-410A

INDOOR UNIT

Airflow(HI/MI/LO)	1800/1630/1420/1250 m³/h	1800/1630/1420/1250 m³/h	1800/1630/1420/1250 m³/h	1800/1630/1420/1250 m³/h	2200/1950/1580 m³/h
Sound Level(HI/MI/LO)	51/49/47/45 dB(A)	51/49/47/45 dB(A)	52/50/48/46 dB(A)	52/50/48/46 dB(A)	55.8/49.2 dB(A)
Unit Dimension(WxDxH)	581x395x1870 mm	581x395x1870 mm	580x395x1870 mm	581x395x1870 mm	610x390x1925 mm
Packaging Dimension(WxDxH)	2080x735x530 mm	2080x735x530 mm	2080x735x530 mm	2080x735x530 mm	2080x765x515 mm
Unit weight (Net/Gross)	59.0/85.0 kg	59.0/85.0 kg	56.0/75.0 kg	59.0/85.0 kg	59.0/77.0 kg

OUTDOOR UNIT

Unit Dimension (WxDxH)	1000x427x790 mm	1000x427x1365 mm	1105x440x1100 mm	1000x427x1365 mm	952x415x1333 mm
Packaging Dimension(WxDxH)	1140x480x865 mm	1135x475x1385 mm	1155x480x1115 mm	1135x475x1385 mm	1095x495x1400 mm
Unit weight (Net/Gross)	69.0/74.0 kg	126/137 kg	92.0/100 kg	126/137 kg	104/116 kg

Copper Tube Size

Low Side	5/8"	3/4"	5/8"	3/4"	3/4"
High Side	1/4"	1/2"	3/8"	3/8"	3/8"


Maximum Pipe Distance Between Indoor and Outdoor

Height	10 m	10 m	10 m	10 m	10 m
Length	30 m	30 m	30 m	30 m	30 m
Circuit Breaker	40 A	40 A / 3PH	40 A	60 A	40 A / 3 PH

** Product features and specifications are subject to change without prior notice.

NON-INVERTER

KLG-SF70-4D3M
KLG-SF40-3D1M

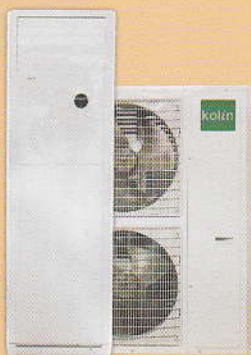

FEATURES FOR FLOOR MOUNTED

- Digital LED Display
- Self Diagnostic Error
- Remote Holder
- Side Air Intake
- Auto Louvers
- Energy Saving / Save Energy (SE)
- Living Room Ambient Mode
- Office / Restaurant Ambient Mode
- Common Mode

AIR CURTAIN

KAC-36RG KAC-48RG



** with Remote

MODEL	KAC-36RG	KAC-48RG
Power Supply	220-230V/60HZ	220-230V/60HZ
Air flow Volume	1,200 CFM	1,650 CFM
Sound Pressure Level	59 dB(A)	61 dB(A)
Rated Power	110 W	140 W
Unit Weight	16.0 Kg	20.0 Kg
Unit Dimension (WxDxH)	902x220x220 mm	902x220x220 mm