

February 21, 2024

POWERKING INDUSTRIES CORP.
476 EDSA BRGY. 87 BAGONG BARRIO, CALOOCAN CITY

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
3	UNIT/S	MODEL: KLM-IC40-3D1M410 KOLIN FLOOR/CEILING AIRCONDITIONER 37,982 Kj/h (3.0TR) FULL DC INVERTER R-410A SINGLE PHASE	126,495.00	91,666.10	PHP	274,998.30
2	UNIT/S	MODEL: KFS-30DAG1M-O KOLIN FLEXMATCH SERIES III AIRCONDITIONER 28,486 Kj/h (3.0HP) INVERTER OUTDOOR UNIT R-410A	68,695.00	53,582.10	PHP	107,164.20
1	UNIT/S	MODEL: KFS-40DAG1M-O KOLIN FLEXMATCH SERIES III AIRCONDITIONER 37,982 Kj/h (4.0HP) INVERTER OUTDOOR UNIT R-410A	106,095.00	82,754.10	PHP	82,754.10
6	UNIT/S	MODEL: KFS-15BAG1M-I KOLIN FLEXMATCH SERIES III AIRCONDITIONER 12,661 Kj/h (1.5HP) INVERTER INDOOR UNIT R-410A	13,595.00	10,604.10	PHP	63,624.60
1	UNIT/S	MODEL: KFS-10BAG1M-I KOLIN FLEXMATCH SERIES III AIRCONDITIONER 9,496 Kj/h (1.0HP) INVERTER INDOOR UNIT R-410A	11,995.00	9,356.10	PHP	9,356.10
4	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32-A KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	74,995.00	54,496.10	PHP	217,984.40
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER R-32	49,495.00	34,606.10	PHP	34,606.10
1	UNIT/S	MODEL: KSM-IW10-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) REGULAR INVERTER R-32	29,495.00	19,006.10	PHP	19,006.10
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	111,995.00	80,356.10	PHP	80,356.10
1	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	171,395.00	125,688.10	PHP	125,688.10
TOTAL UNIT COST					PHP	1,015,538.10
ESTIMATED COST OF INSTALLATION (please see attached) with existing units					PHP	499,360.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,514,898.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR/CEILING (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE (Commercial): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

EST. 1996

Bringing comfort to your home.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


INSTALLATION C/O AUTHORIZED SERVICE CENTER.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph


Very Truly Yours,


GLORIA TIFFANY T. ABESAMIS
KMI-ASSISTANT

Noted By:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-24-0203
REG-22%/8k/7k/4k

Conforme:

SIGNATURE OVER PRINTED NAME


Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

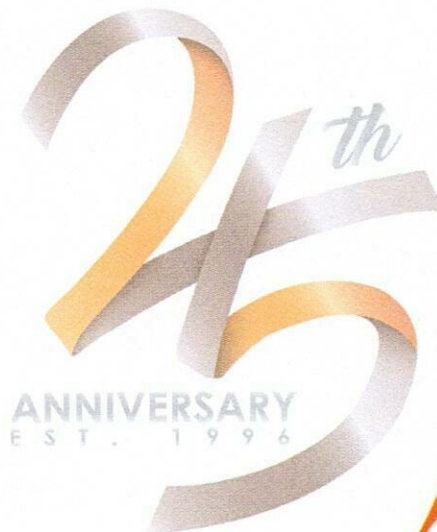

Bringing comfort to your home.

February 15, 2024
POWER KING
 476 EDSA BRGY. 87 BAGONG BARIO CALOOCAN
 0917-7176261
 Email address

MODEL	Qty
KLM-IC40-3D1M /	3 /
KFS-30DAG1M32-O /	2 /
KFS-40DAG1M32-0 /	1 /
KFS-15BAG1M-I /	6 /
KFS-10BAG1M-I /	1 /
KSG-IWF-30WY8K1M32 /	4 /
KSM-IW25-WCT10M1M32 /	1 /
KSM-IW10-WCT10M1M32 /	1 /
KLG-IF40-5G1M32 /	1 /
KLG-IF70-5G1M32 /	1 /
(Existing unit) KLG-IF40-5G1M32 /	2 /

2ND FLOOR

BUCTION ROOM	Area	186.946 sqm
---------------------	------	-------------

ACU 1 4.0 HP Floor Standing Inverter (Existing unit) KLG-IF40-5G1M32

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 30 ft

Labor Charge

₱ 6,000.00

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Dismantle	4.0HP Floor Standing	1 set	₱ 3,000.00/set	₱ 3,000.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 19,365.00

Estimated Charges ₱ 25,365.00

ACU 2 4.0 HP Floor Standing Inverter (Existing unit) KLG-IF40-5G1M32

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Labor Charge

₱ 6,000.00

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	50 ft	₱ 400.00/ft	₱ 20,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	57 ft	₱ 100.00/ft	₱ 5,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Metal Clamp	3"	3 pc/s	₱ 120.00/pc	₱ 360.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Dismantle	4.0HP Floor Standing	1 set	₱ 3,000.00/set	₱ 3,000.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 35,125.00

Estimated Charges ₱ 41,125.00

ACU 3 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (FLOOR)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	47 ft	₱ 100.00/ft	₱ 4,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60 A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 24,895.00

Estimated Charges**₱ 38,895.00****4TH FLOOR****INVENTORY MANAGER**

Area 8.76 sqm

ACU 4 1.0 HP Wall Mounted Inverter**KSM-IW10-WCT10M1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 15 ft

Initial Charge**₱ 5,900.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	20 A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 4,425.00

Estimated Charges**₱ 10,325.00****RECOVERY ROOM**

Area 60.24 sqm

ACU 5 4.0 HP Ceiling Suspended Inverter**KLM-IC40-3D1M410**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 15 ft

Initial Charge**₱ 12,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 4,475.00

Estimated Charges**₱ 16,475.00**

INVENTORY ROOM

Area 116.79 sqm

ACU 6 4.0 HP Ceiling Suspended Inverter**KLM-IC40-3D1M410**

Estimated Pipe Length = 42 ft

Estimated Royal Cord Length = 49 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	32 ft	P 400.00/ft	P 12,800.00
Royal Cord (comm. wire)	39 ft	P 100.00/ft	P 3,900.00
Royal Cord (ACCU-Breaker)	7 ft	P 70.00/ft	P 490.00
Rubber Insulation	5 pc/s	P 350.00/pc	P 1,750.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
Full thread	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	4 pc/s	P 120.00/pc	P 480.00
Outdoor bracket	1 pc/s	P 1,650.00/pc	P 1,650.00
Drain Hose	7 ft	P 25.00/ft	P 175.00
			P 22,395.00

Estimated Charges

P 34,395.00

ACU 7 4.0 HP Ceiling Suspended Inverter**KLM-IC40-3D1M410**

Estimated Pipe Length = 29 ft

Estimated Royal Cord Length = 36 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	19 ft	P 400.00/ft	P 7,600.00
Royal Cord (comm. wire)	26 ft	P 100.00/ft	P 2,600.00
Royal Cord (ACCU-Breaker)	5 ft	P 70.00/ft	P 350.00
Rubber Insulation	4 pc/s	P 350.00/pc	P 1,400.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
Full thread	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	2 pc/s	P 120.00/pc	P 240.00
Outdoor bracket	1 pc/s	P 1,650.00/pc	P 1,650.00
Drain Hose	5 ft	P 25.00/ft	P 125.00
			P 15,115.00

Estimated Charges

P 27,115.00

5TH FLOOR**LOBBY AND HALLWAY**

Area 53.2 sqm

ACU 8 2.5 HP Wall Mounted Inverter**KSM-IW25-WCT10M1M32**

Estimated Pipe Length = 14 ft

Estimated Royal Cord Length = 19 ft

Initial Charge

P 6,900.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	4 ft	P 350.00/ft	P 1,400.00
Royal Cord (comm. wire)	9 ft	P 100.00/ft	P 900.00
Royal Cord (ACCU-Breaker)	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	1 pc/s	P 2,500.00/pc	P 2,500.00
Drain Hose	5 ft	P 25.00/ft	P 125.00
			P 6,225.00

Estimated Charges

P 13,125.00

ACU 9 3.0 HP Wall Mounted Inverter**KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	40 ft	P 400.00/ft	P 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	47 ft	P 100.00/ft	P 4,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30 A	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	5 pc/s	P 120.00/pc	P 600.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 25,125.00

Estimated Charges

P 30,625.00

BEDROOM 1&2

Area 13.6 sqm

ACU 10 3.0 hp**KFS-30DAG1M-O****Initial Charge**

P 8,500.00

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
Drain Hose	White -1/2"	4 ft	P 25.00/ft	P 100.00

P 3,900.00

12,400.00

BEDROOM 1

Area 13.6 sqm

FCU A 1.5 HP Wall Mounted Inverter**KFS-15BAG1M-I**

Estimated Pipe Length = 16 ft

Estimated Royal Cord Length = 23 ft

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	6 ft	P 350.00/ft	P 2,100.00
Royal Cord (comm. wire)	2.mm2 x 4C	13 ft	P 100.00/ft	P 1,300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 350.00/pc	P 700.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 4,225.00

Estimated Charges

P 16,625.00

BEDROOM 2

Area 13.6 sqm

FCU B 1.5 HP Wall Mounted Inverter**KFS-15BAG1M-I**

Estimated Pipe Length = 26 ft

Estimated Royal Cord Length = 33 ft

Initial Charge

P 3,000.00

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	26 ft	P 350.00/ft	P 9,100.00
Royal Cord (comm. wire)	2.mm2 x 4C	33 ft	P 100.00/ft	P 3,300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 350.00/pc	P 1,050.00
Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Pipe Hanger	fabricated	1 pc/s	P 300.00/pc	P 300.00
Metal Clamp	3"	1 pc/s	P 120.00/pc	P 120.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 14,145.00

Estimated Charges

P 17,145.00

BEDROOM 3&4	Area	13.6 sqm
------------------------	------	----------

ACU 10 3.0 hp KFS-30DAG1M-O

Initial Charge P 8,500.00

Consumables					
Installation Materials		Description	Qty	Price per qty	Subtotal
Royal Cord (ACCU-Breaker)		3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof		40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket		Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
Drain Hose		White -1/2"	4 ft	P 25.00/ft	P 100.00
					P 3,900.00

12,400.00

BEDROOM 3	Area	13.6 sqm
------------------	------	----------

FCU A 1.5 HP Wall Mounted Inverter KFS-15BAG1M-I

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials		Description	Qty	Price per qty	Subtotal
Copper Tube		Ø 1/4" x Ø 1/2"	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)		2.mm2 x 4C	30 ft	P 100.00/ft	P 3,000.00
Pipe Hanger		fabricated	1 pc/s	P 300.00/pc	P 300.00
Full thread		3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp		3"	1 pc/s	P 120.00/pc	P 120.00
Rubber Insulation		2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
Drain Hose		White -1/2"	5 ft	P 25.00/ft	P 125.00
					P 13,145.00

Estimated Charges		P 25,545.00
-------------------	--	-------------

BEDROOM 4	Area	13.6 sqm
------------------	------	----------

FCU B 1.5 HP Wall Mounted Inverter KFS-15BAG1M-I

Estimated Pipe Length = 26 ft

Estimated Royal Cord Length = 33 ft

Initial Charge P 3,000.00

Consumables

Installation Materials		Description	Qty	Price per qty	Subtotal
Copper Tube		Ø 1/4" x Ø 1/2"	26 ft	P 350.00/ft	P 9,100.00
Royal Cord (comm. wire)		2.mm2 x 4C	33 ft	P 100.00/ft	P 3,300.00
Rubber Insulation		2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
Full thread		3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Pipe Hanger		fabricated	1 pc/s	P 300.00/pc	P 300.00
Metal Clamp		3"	2 pc/s	P 120.00/pc	P 240.00
Drain Hose		White -1/2"	5 ft	P 25.00/ft	P 125.00
					P 14,615.00

Estimated Charges		P 17,615.00
-------------------	--	-------------

BEDROOM 5&6&WORK SPACE	Area	
---------------------------------------	------	--

ACU 10 4.0 hp KFS-40DAG1M-O

Initial Charge P 8,500.00

Consumables

Installation Materials		Description	Qty	Price per qty	Subtotal
Royal Cord (ACCU-Breaker)		5.5mm x 3c	5 ft	P 70.00/ft	P 350.00
Circuit Breaker waterproof		40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket		Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
Drain Hose		White -1/2"	4 ft	P 25.00/ft	P 100.00
					P 3,950.00

12,450.00

BEDROOM 5	Area	13.6 sqm
------------------	------	----------

FCU A 1.5 HP Wall Mounted Inverter

KFS-15BAG1M-I

Estimated Pipe Length = 56 ft

Estimated Royal Cord Length = 63 ft

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	46 ft	₱ 350.00/ft	₱ 16,100.00
Royal Cord (comm. wire)	2.mm2 x 4C	53 ft	₱ 100.00/ft	₱ 5,300.00
Pipe Hanger	fabricated	1 pc/s	₱ 300.00/pc	₱ 300.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	2 pc/s	₱ 120.00/pc	₱ 240.00
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	₱ 350.00/pc	₱ 2,450.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 24,665.00

Estimated Charges

₱ 37,115.00

BEDROOM 6	Area	13.6 sqm
------------------	------	----------

FCU B 1.5 HP Wall Mounted Inverter

KFS-15BAG1M-I

Estimated Pipe Length = 42 ft

Estimated Royal Cord Length = 49 ft

Initial Charge

₱ 3,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	42 ft	₱ 350.00/ft	₱ 14,700.00
Royal Cord (comm. wire)	2.mm2 x 4C	49 ft	₱ 100.00/ft	₱ 4,900.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Pipe Hanger	fabricated	1 pc/s	₱ 300.00/pc	₱ 300.00
Metal Clamp	3"	2 pc/s	₱ 120.00/pc	₱ 240.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 22,515.00

Estimated Charges

₱ 25,515.00

WORK SPACE	Area	4.14 sqm
-------------------	------	----------

FCU C 1.0 HP Wall Mounted Inverter

KFS-10BAG1M-I

Estimated Pipe Length = 36 ft

Estimated Royal Cord Length = 43 ft

Initial Charge

₱ 3,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	₱ 350.00/ft	₱ 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	13 ft	₱ 100.00/ft	₱ 1,300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Pipe Hanger	fabricated	1 pc/s	₱ 300.00/pc	₱ 300.00
Metal Clamp	3"	2 pc/s	₱ 120.00/pc	₱ 240.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 16,815.00

Estimated Charges

₱ 19,815.00

ROOF DECK

CONFERENCE ROOM Area 26 sqm

ACU 13 3.0 HP Wall Mounted Inverter *KSG-IWF-30Wfy8K1M32*

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Initial Charge

₱ 4,700.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30 A	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s ₱ 350.00/pc	₱ 1,050.00
Outdoor bracket	Fabricated floor	1 pc/s ₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	5 ft ₱ 25.00/ft	₱ 125.00
			<u>₱ 17,175.00</u>

Estimated Charges

₱ 21,875.00

OFFICE Area 81.984 sqm

ACU 14 3.0 HP Wall Mounted Inverter *KSG-IWF-30Wfy8K1M32*

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Initial Charge

₱ 4,700.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30 A	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s ₱ 350.00/pc	₱ 1,050.00
Outdoor bracket	Fabricated floor	1 pc/s ₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	5 ft ₱ 25.00/ft	₱ 125.00
			<u>₱ 17,175.00</u>

Estimated Charges

₱ 21,875.00

ACU 15 3.0 HP Wall Mounted Inverter *KSG-IWF-30Wfy8K1M32*

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge

₱ 4,700.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	47 ft	₱ 100.00/ft	₱ 4,700.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30 A	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s ₱ 350.00/pc	₱ 2,100.00
Outdoor bracket	Fabricated floor	1 pc/s ₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	5 ft ₱ 25.00/ft	₱ 125.00
			<u>₱ 26,725.00</u>

Estimated Charges

₱ 31,425.00

CEO OFFICE	Area	47.55 sqm
-------------------	-------------	------------------

ACU 16 4.0 HP Floor Standing Inverter **KLG-IF40-5G1M32**

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Initial Charge

₱ 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00

₱ 16,365.00

Estimated Charges

₱ 27,365.00

Total Estimated Charges

₱ 499,360.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were base onKolin's surveyor.For approval by customer.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 4 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 5 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformance:

Rodolfo dela Cruz Jr.


Field Surveyor

Signature Over Printed Name


Reviewed by:

Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation

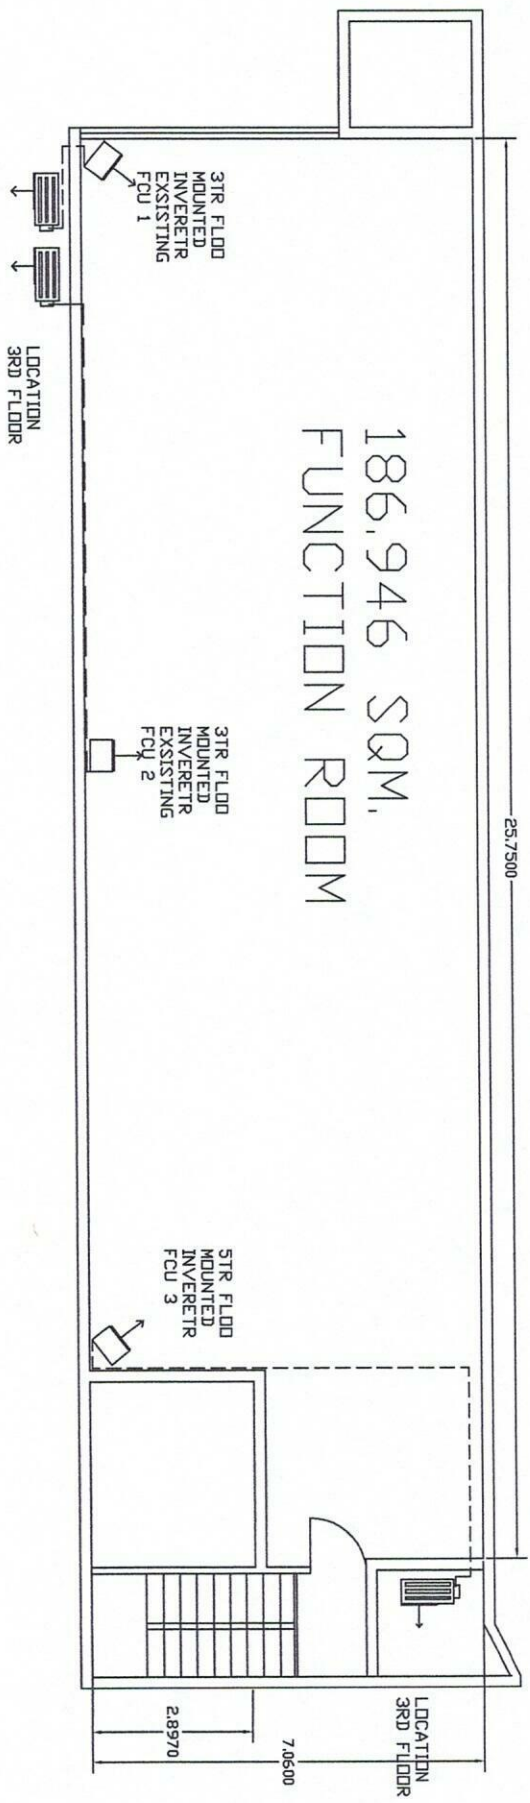

2ND FLOOR

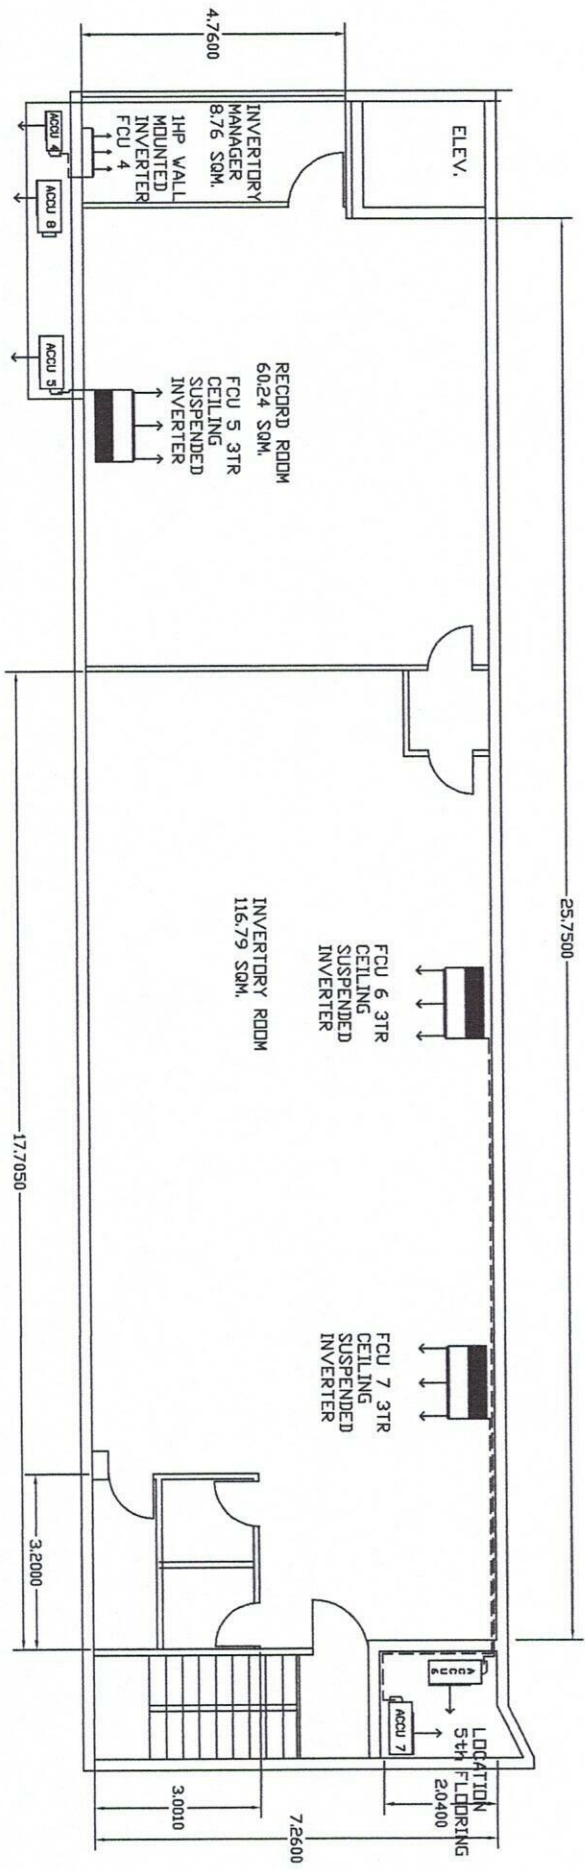

4TH FLOOR

LOCATION 5TH FLOORING