



May 9, 2025

SOLABEC HOLDINGS CORP.
87 ZODIAC ST. BRGY. BEL-AIR VILLAGE, MAKATI CITY
TEL#: 0917-5266222

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	112,156.20
TOTAL UNIT COST					PHP	112,156.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	29,015.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	141,771.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

*** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).*

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-25-0367
REG-24%/14K

Conforme:

SIGNATURE OVER PRINTED NAME



KOLIN Philippines International Inc.
Survey Form

Nº 003638

Customer Name : SOLAR BEC HOLDING CO. INC. Date : 5-7-25
 Address : 2700120 ST. BAY BEL - 214 VILLAGE SJR No. : 251213

Establishment Type : Residential ☒ Commercial ☐ Area Surveyed : 1200/m² JAPA
 Area Surveyed : _____

Recommended Product Model : KL-1F60-GC11/m³

Cooling Capacity Computation

Floor Area : 59 sqm.
 Ceiling Height : _____ mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>59</u>	x	550 Btu/h	<u>32450</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :	<u>4.5</u>	x	20%	<u>6490</u> Btu/h
Window Direct Sunlight		x	20% - 50%	<u>6490</u> Btu/h
Total Cooling Capacity				<u>45430</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>6</u>	x	300 Btu/h	<u>1800</u> Btu/h
No. of Ordinary Light (<40w)	<u>10</u>	x	200 Btu/h	<u>2000</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)	<u>1</u>	x	800 Btu/h	<u>800</u> Btu/h
No. of Cooking Range	<u>1</u>	x	1500 Btu/h	<u>1500</u> Btu/h
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer / WATER PUMP 0.18 HP 550 W	<u>1</u>	x	500 Btu/h	<u>500</u> Btu/h
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>7000</u> Btu/h

Recommended Cooling Capacity

52430 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☒ Site ☐ No |
| 4. Service Ledge | ☒ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern;

EXPLORE COMPARTMENT IF THE AREA.
RYING PUMP AND HAZARDOUS FARM GATED
OUTDOOR W/ W/ LIKE MONIFY. 4/1X
SCAFFOLDING IF NEEDED.
DOUBLE CHECK THE POWER SOURCE W/ W/.
BY CUSTOMER CONTRACTOR.

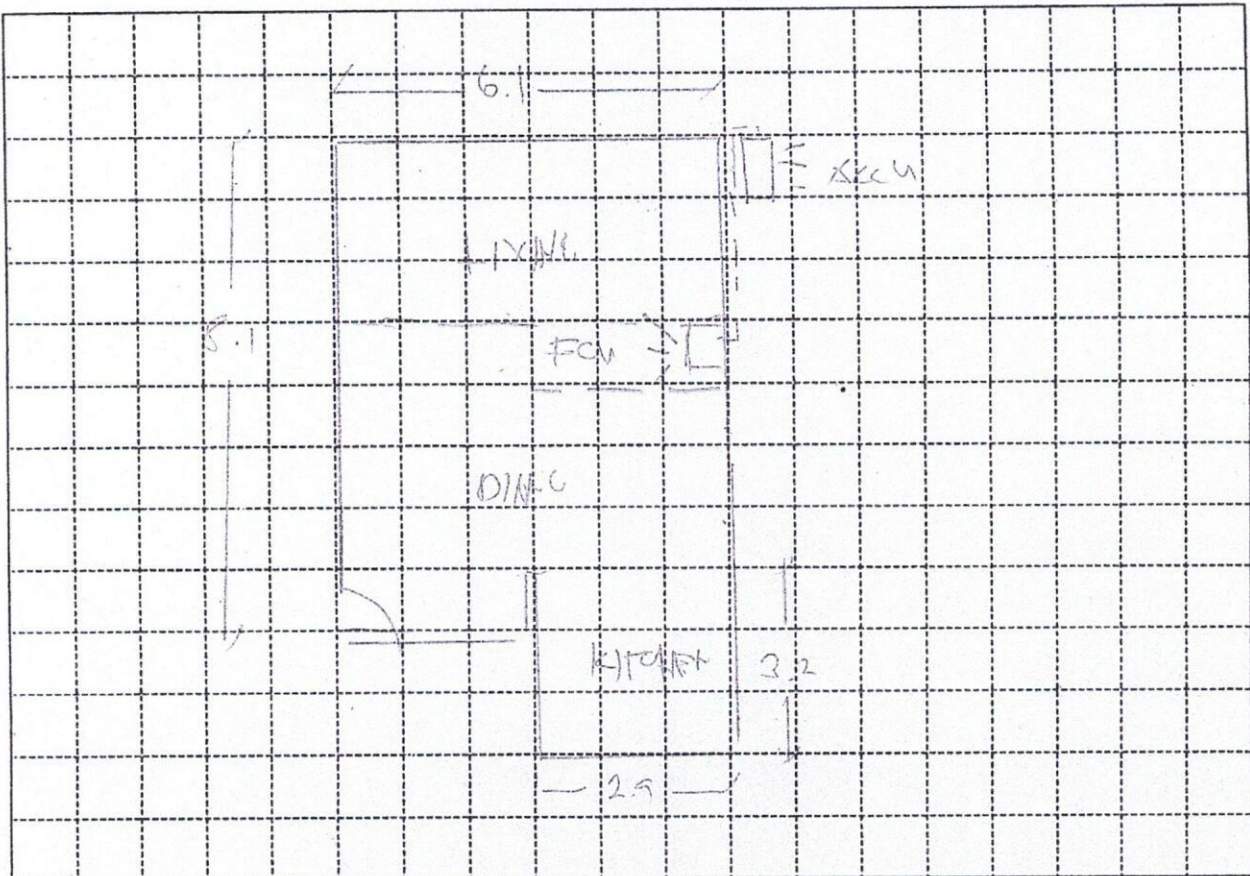

Indoor Unit Location : CENTER OF AREA, BETWEEN DINING & LIVING
 Outdoor Unit Location : AT THE RIGHT SIDE CORNER SAME LOCATION.
 Pipe Length : 17 FT
 Special Note : _____

Installation Cost Estimate				
Material Description	Qty.	Unit Cost	Total Cost	
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	2 FT	400	800	
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	10 FT	100	1000	
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	10 FT	70	700	
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000	
Bracket (ODU) (Imptd. / Fabricated) (Floor / Wall)	1	5000	5000	
Bracket (WAC) Angle Type				
PVC Pipe (drain) 1/2", 3/4"	1	150	150	
PVC Pipe (electrical) 3/4", 1"				
Drain Pump				
Drain Pump Hose	10 FT	25	250	
Chipping Works 52 FT - 0.001 CC	4 SET	1500	6000	
Dismantling Fee (existing air-conditioner) 2.5 HP		2500	2500	
Initial Charge			14000	
TOTAL ESTIMATE		P	29,000	

Note :

- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
- Survey fee will be **deducted** in the installation fee.

Prepared by:

JEFFREY D. POPE
 Signature Over Printed Name

Customer Conforms:

SUSANA M. MORALES
 Signature Over Printed Name