



December 9, 2024

STATE CENTER
UNIT 1412, 333 JUAN LUNA ST., BINONDO MANILA
TEL#: 0908-9526124

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10	PHP	162,584.20
TOTAL UNIT COST					PHP	162,584.20
ESTIMATED COST OF INSTALLATION (please see attachments)					PHP	31,480.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	194,664.20

* Waived Delivery charge

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

* Cost of Installation is Package with the Unit(s), this cost cannot avail separately

** You may pay first for the unit costs, payment for installation to be paid after the actual works.

*** Final overall installation cost will be based on actual.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-12-24-1001
ECY-22%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

DECEMBER 05, 2024

STATE CENTER

State Center Bldg. Unit 1412, 333 Juan Luna St. Binondo, Manila

[0908-9526124](#)

Model	Qty
KLG-IF40-5G1M32	2

REV1

UNIT 1412

OPEN AREA	Area = 82 sq.m
------------------	----------------

ACU 1 4.0hp Wallmounted Inverter

KLG-IF40-5G1M32

Estimated Pipe Length : 10 ft
Estimated Royal Cord Length : 17 ft

Initial Charge P 11,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100.00 / ft	P 700.00
Royal Cord (ODU-Breaker)	5.0mm2 x 3C	7 ft	P 70.00 / ft	P 490.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(Wall)	Galvanised	1 pc(s)	P 1,650.00 / pc	P 1,650.00
PVC (Drainline)	blue - 3/4"	1 pc(s)	P 150.00 / pc	P 150.00
				P 3,990.00

Estimated Charges P 14,990.00

ACU 2 4.0hp Wallmounted Inverter

KLG-IF40-5G1M32

Estimated Pipe Length : 13 ft
Estimated Royal Cord Length : 20 ft


Initial Charge P 11,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	3 ft	P 400.00 / ft	P 1,200.00
Royal Cord	2.mm2 x 4C	10 ft	P 100.00 / ft	P 1,000.00
Royal Cord (ODU-Breaker)	5.0mm2 x 3C	7 ft	P 70.00 / ft	P 490.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(Wall)	Galvanised	1 pc(s)	P 1,650.00 / pc	P 1,650.00
PVC (Drainline)	blue - 3/4"	1 pc(s)	P 150.00 / pc	P 150.00
				P 5,490.00

Estimated Charges P 16,490.00

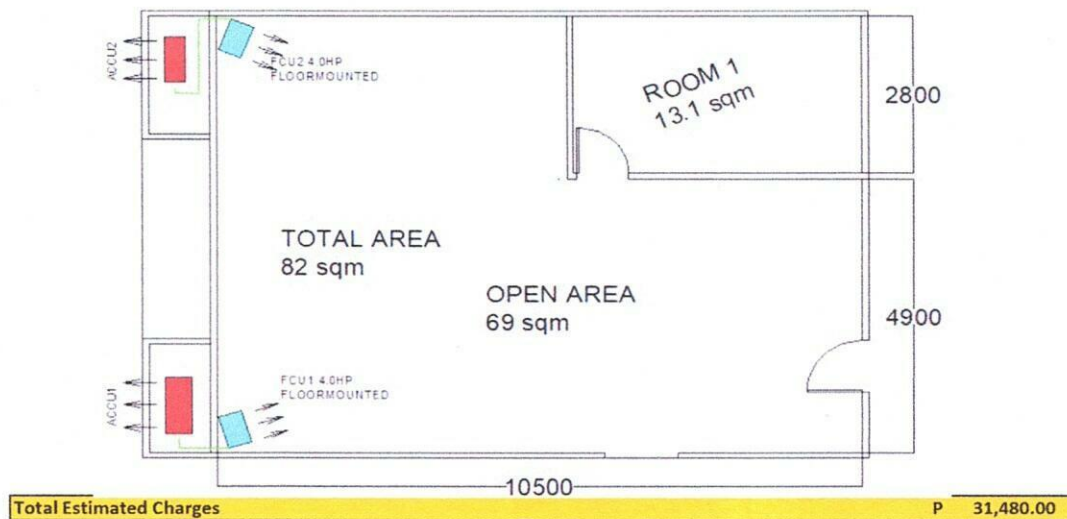

Validity This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit before installation.
- 4 Customer put a exhaust fan inlet and outlet to room2.
- 5 Working days: Monday to Saturday, 8am- 5pm without parking.4 pax
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 9 Final charges will be based on actual installation.

Prepared by:

Jeffrey Dadios
Field Surveyor

Reviewed by:

Engr Kenneth Zamora
Service Supervisor
Field and Shop Operation

Customer Conformance:

Signature Over Printed Name