



Airconditioning & Refrigeration Services
B72 L22 17th., Brgy. 183 Villamor Pasay city Metro Manila 1300
Cellphone: 0917-1225048/ 0999-5573715
Email: zeusrafann053012@gmail.com / carcillarooffice01@gmail.com

*SUPPLY	*INSTALLATION	*CHECK-UP	*CLEANING	*PREVENTIVE MAINTENANCE
---------	---------------	-----------	-----------	-------------------------

Installation Quotation

Simon, JG / Trina
52 Washington St., Merville Park, Brgy. Merville, PARAÑAQUE CITY
0967-1185333

July 28, 2025
AIQ 25-00025

Project name: Option 1: Installation of Kolin Aircon

Description		QTY		
ACU 1 (Master's Bedroom)	KSG-IWF-30WFY8K1M32	1		
Estimated Pipe Length	=	23ft		
Estimated Royal Cord Length	=	32ft		
Basic Installation (10ft copper tubing and communication wire)		8,500.00		
Installation materials	Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)	1/4"X5/8" new	13ft	400/ft	5,200.00
Royal Cord (excess of 10ft)	2.00mm2X4C	22ft	100/ft	2,200.00
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft	200.00
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc	400.00
				8,000.00
TOTAL				16,500.00
ACU 2 (Guest Room)	KSG-IWF-20WFY8K1M32	1		
Estimated Pipe Length	=	11ft		
Estimated Royal Cord Length	=	19ft		
Basic Installation (10ft copper tubing and communication wire)		7,500.00		
Installation materials	Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)	1/4"X1/2" new	1ft	350/ft	350.00
Royal Cord (excess of 10ft)	2.00mm2X4C	9ft	100/ft	900.00
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft	200.00
PVC Blue Pipe	Blue pipe 3/4"	1pc	200/pc	200.00
				1,650.00
TOTAL				9,150.00
ACU 3 (Bedroom 3)	KSG-IWF-30WFY8K1M32	1		
Estimated Pipe Length	=	21ft		
Estimated Royal Cord Length	=	31ft		
Basic Installation (10ft copper tubing and communication wire)		8,500.00		
Installation materials	Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)	1/4"X5/8" new	11ft	400/ft	4,400.00
Royal Cord (excess of 10ft)	2.00mm2X4C	21ft	100/ft	2,100.00
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft	200.00
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc	400.00
				7,100.00
TOTAL				15,600.00
ACU 4 (Family Room)	KSG-IWF-20WFY8K1M32	1		
Estimated Pipe Length	=	35ft		
Estimated Royal Cord Length	=	41ft		
Basic Installation (10ft copper tubing and communication wire)		7,500.00		
Installation materials	Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)	1/4"X1/2" new	25ft	350/ft	8,750.00
Royal Cord (excess of 10ft)	2.00mm2X4C	31ft	100/ft	3,100.00
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4	50/ft	200.00
PVC Blue Pipe	Blue pipe 3/4"	2pc	200/pc	400.00
				12,450.00
TOTAL				19,950.00
ACU 5 (Dining Room) Unit 1	KSG-IWF-30WFY8K1M32	2		
Estimated Pipe Length	=	39ft		
Estimated Royal Cord Length	=	49ft		
Basic Installation (10ft copper tubing and communication wire)		8,500.00		
Installation materials	Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)	1/4"X5/8" new	29ft	400/ft	11,600.00
Royal Cord (excess of 10ft)	2.00mm2X4C	39ft	100/ft	3,900.00
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft	200.00
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc	400.00
				16,100.00

TOTAL				24,600.00
Unit 2				
Estimated Pipe Length		=	39ft	
Estimated Royal Cord Length		=	49ft	
Basic Installation (10ft copper tubing and communication wire)				8,500.00
Installation materials		Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)		1/4"X5/8" new	29ft	400/ft
Royal Cord (excess of 10ft)		2.00mm2X4C	39ft	100/ft
Wire (Royal Cord-Breaker to ODU)		5.5mm x 3	4ft	50/ft
PVC Blue Pipe		Blue pipe 3/4"	2pcs	200/pc
				16,100.00
TOTAL				24,600.00
TOTAL CHARGES				
				110,400.00

Bank details
China Bank Corporation
Account Name: Carcillar Airconditioning and Refrigeration Services
143602005343

GCASH
0999-5573715
Rafael Carcillar

Prepared by:

Melissa de Castro
Office Admin

Conformed by:



CARCILLAR

Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715


Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

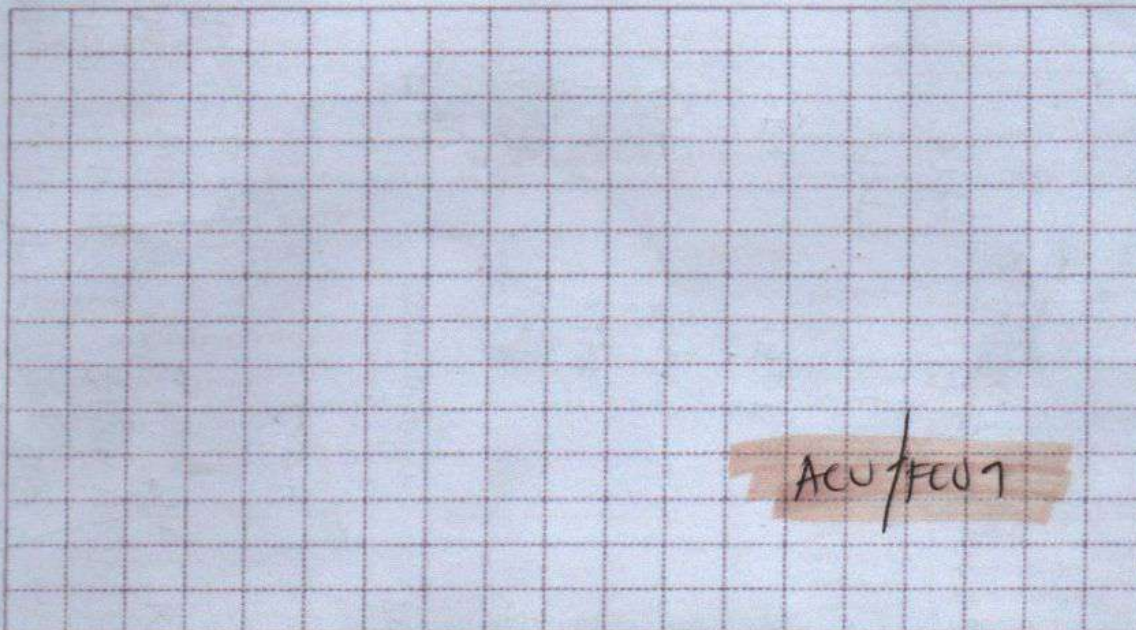

Indoor Unit Location

Outdoor Unit Location

Pipe Length

Special Note

- centro sa wall ng CR
- kumukun ng bucket garden, 20cm from floor
- 23ft

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5 5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4" 1"		
PVC Pipe (electrical)			
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air conditioner)			
Initial Charge			
TOTAL ESTIMATE			P 16,500

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusraffann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simon TG Date _____
Address _____ SJR No _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 2hp WM

Cooling Capacity Computation

Floor Area 18.5 sqm
Ceiling Height _____ mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area 18.5 x 550 Btu/h 10,175 Btu/h
Ceiling Height (excess of 3 mtrs.) _____ x 20% _____ Btu/h
Window Direct Sunlight 10,175 x (30% - 50%) 3,052.5 Btu/h
Total Cooling Capacity _____ Btu/h

Add : Additional Heat Load

No. of Person 2 x 300 Btu/h 600 Btu/h
No. of Ordinary Light (<40w) 6 x 200 Btu/h 1,200 Btu/h
No. of Special Light (>40w) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (< 6 cu ft) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (> 6 cu ft) _____ x 800 Btu/h _____ Btu/h
No. of Cooking Range _____ x 1500 Btu/h _____ Btu/h
No. of Laptop Computer _____ x 150 Btu/h _____ Btu/h
No. of Desktop Computer _____ x 400 Btu/h _____ Btu/h
No. of Printer _____ x 500 Btu/h _____ Btu/h
No. of Photocopier _____ x 1000 Btu/h _____ Btu/h
Total Cooling Capacity 15,025 Btu/h

Recommended Cooling Capacity

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern

- CHIPPING WORK c/o CLIENT CIVIL CONTRACTOR
- POWER SUPPLY c/o CLIENT CONTRACTOR
- DRAIN PIPE END, FINISH BY CONTRACTOR

TO ALL UNITS



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

1 ACU/FCU 2

Indoor Unit Location - INDOOR UNIT LOCATE 30CM FROM SLIDING DOOR
Outdoor Unit Location - RIGHT OF SLIDING DOOR 30CM
Pipe Length - 11 FT
Special Note - FROM FLOOR 20CM HEIGHT PAAS

Installation Cost Estimate			
Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330 2430 2520 3520 4620	350	350
Wire (Royal Cord signal wire) (excess of 10ft.)	2 0mmx4C	160	320
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	50	200
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1" 3/4" 1"		200
PVC Pipe (electrical)	3/4" 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air conditioner)			
Initial Charge			7,100
TOTAL ESTIMATE			8,950

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simon Date _____
Address _____ SJR No. _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 3hp Wm

Cooling Capacity Computation

Floor Area 36 sqm
Ceiling Height _____ mtr

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area	<u>36</u>	x	550 Btu/h	<u>19,800</u> Btu/h
Ceiling Height (excess of 3 mtrs.)		x	20%	<u>3,960</u> Btu/h
Window Direct Sunlight	<u>19,800</u>	x	20% 50%	<u>3,960</u> Btu/h
Total Cooling Capacity				<u>26,760</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u> Btu/h
No. of Ordinary Light (<40w)	<u>9</u>	x	200 Btu/h	<u>1,800</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>26,760</u> Btu/h

Recommended Cooling Capacity

2.9 hp Btu/h

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Bedroom 3

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern: Spine



CARCILLAR

Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafenn053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

Handwritten note on the grid: #CU/ACU 3

Indoor Unit Location

Outdoor Unit Location

Pipe Length

Special Note

- Sa ibabaw ng cabinet,
- Sa gilid ng salamin
- 21 FT
- Sila gagamit ng katapitan ng #CU

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2", 3/4"		
PVC Pipe (electrical)	3/4", 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air-conditioner)			
Initial Charge			8500
TOTAL ESTIMATE			15,600

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simon Date _____
Address _____ SJR No _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 2 units 3hp Wm

Cooling Capacity Computation

Floor Area 70 sqm
Ceiling Height _____ mtr.
note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area	<u>70</u>	x	550 Btu/h	<u>38,500</u> Btu/h
Ceiling Height (excess of 3 mtrs.)	<u>38,500</u>	x	20%	<u>7,700</u> Btu/h
Window Direct Sunlight	<u>38,500</u>	x	20% <u>50%</u>	<u>19,200</u> Btu/h
Total Cooling Capacity				<u> </u> Btu/h

Add : Additional Heat Load

No. of Person	<u>10</u>	x	300 Btu/h	<u>3000</u> Btu/h
No. of Ordinary Light (<40w)	<u>15</u>	x	200 Btu/h	<u>3000</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	<u> </u> Btu/h
No. of Refrigerator (< 6 cu ft.)		x	400 Btu/h	<u> </u> Btu/h
No. of Refrigerator (> 6 cu ft.)		x	800 Btu/h	<u> </u> Btu/h
No. of Cooking Range		x	1500 Btu/h	<u> </u> Btu/h
No. of Laptop Computer		x	150 Btu/h	<u> </u> Btu/h
No. of Desktop Computer		x	400 Btu/h	<u> </u> Btu/h
No. of Printer		x	500 Btu/h	<u> </u> Btu/h
No. of Photocopier		x	1000 Btu/h	<u> </u> Btu/h
Total Cooling Capacity				<u>91,500</u> Btu/h

Recommended Cooling Capacity

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length

7.9 hp Dimy

Scope of Work Agreement

- | | | |
|-----------------------------------|--|---|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☒ Yes ☐ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern _____



CARCILLAR

Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715


Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

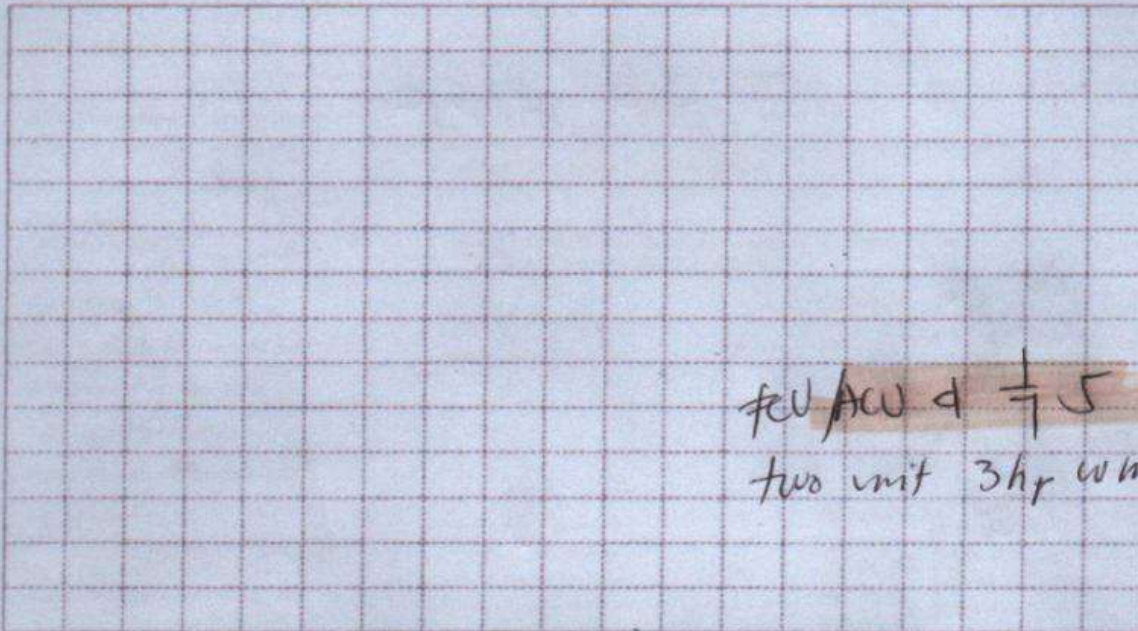

Indoor Unit Location

Outdoor Unit Location

Pipe Length

Special Note

- sa ilalain ng ledge, igit na pagitan ng pink
- platin ng bubong, pantay sa floor ng lobby ng bubong
- 29ft left, 29ft right
- 2unit 3hr

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620	400	11,600
Wire (Royal Cord-signal wire) (excess of 10ft)	2 0mmx4C	100	3,700
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	50	400
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Impd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2", 3/4"		
PVC Pipe (electrical)	3/4", 1"	260	200
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air-conditioner)			
Initial Charge			8500
TOTAL ESTIMATE			24,400

left right
11,600
3,700
400
200
8500
24,400

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
 Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name: SIMON, JG / TRINA Date: 7-26-25
 Address: C2 WASHINGTON ST. MEDEVILLE SJR No: #0-00265672
 Establishment Type: ☒ Residential ☐ Commercial Area Surveyed: _____
 Recommended Product Model: 2hp WM

Cooling Capacity Computation

Floor Area: 24 sqm
 Ceiling Height: _____ mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area	<u>24</u>	x	550 Btu/h	<u>13,200</u> Btu/h
Ceiling Height (excess of 3 mtrs.)	_____	x	20%	_____ Btu/h
Window Direct Sunlight	<u>13,200</u>	x	<u>20%</u> 50%	<u>2,640</u> Btu/h
Total Cooling Capacity				_____ Btu/h

Add : Additional Heat Load

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u> Btu/h
No. of Ordinary Light (<40w)	<u>7</u>	x	200 Btu/h	<u>1,400</u> Btu/h
No. of Special Light (>40w)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (< 6 cu ft)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (> 6 cu ft)	_____	x	800 Btu/h	_____ Btu/h
No. of Cooking Range	_____	x	1500 Btu/h	_____ Btu/h
No. of Laptop Computer	_____	x	150 Btu/h	_____ Btu/h
No. of Desktop Computer	_____	x	400 Btu/h	_____ Btu/h
No. of Printer	_____	x	500 Btu/h	_____ Btu/h
No. of Photocopier	_____	x	1000 Btu/h	_____ Btu/h
Total Cooling Capacity				<u>18,240</u> Btu/h

Recommended Cooling Capacity: 2.0hp Btu/h

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☐ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension : _____

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern: _____

— Chipping works, power supply, ~~drain~~ provide by client
 — drain and long hose, sila na ang maghahatag sa pinaka malapit na drainage

Family Room
 ACU / FCU 6



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
 * Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY

*SUPPLY

*INSTALLATION


*CHECK-UP

*CLEANING

*PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

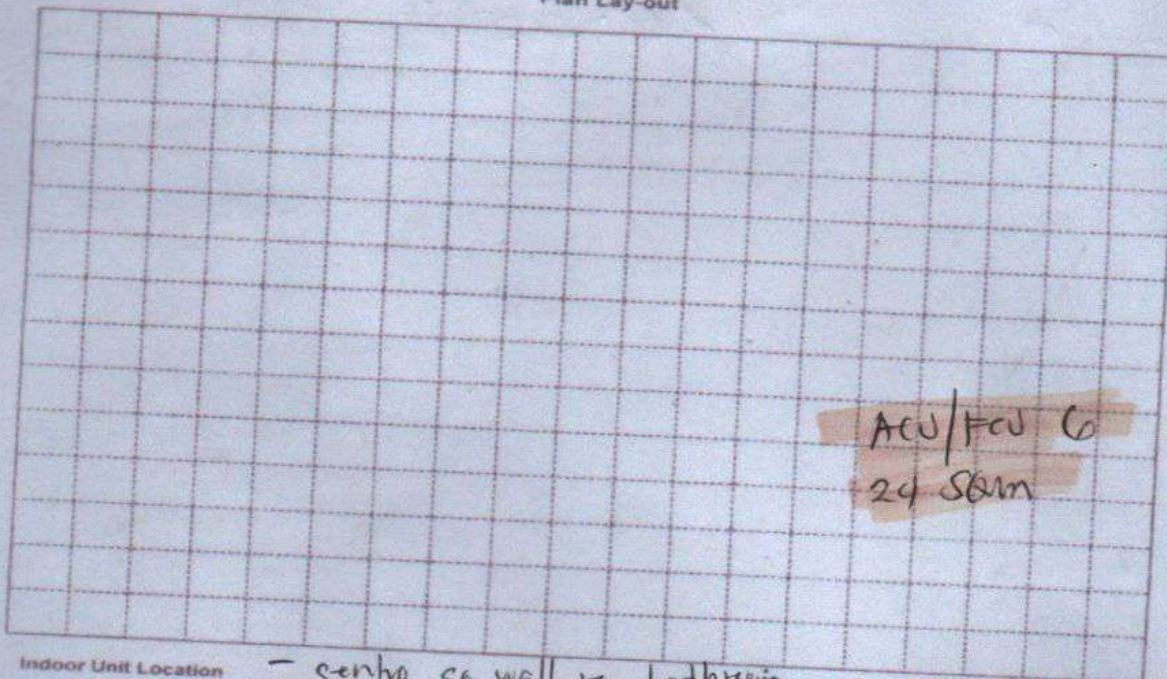

ACU/FCU 6
 24 SQm

Indoor Unit Location

- centro sa wall ng bathroom

Outdoor Unit Location

- ilalim ng bubing, pantay sa flooring na bahay (lock)

Pipe Length

- 35 ft

Special Note

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft)	2 0mmx4C	25	350
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	31	100
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph	4	50
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4"		
PVC Pipe (electrical)	3/4" 1"		
Drain Pump	2	200	400
Drain Pump Hose			
Chipping Works			
Dismantling Fee (existing air-conditioner)	mtl		
Initial Charge			
TOTAL ESTIMATE			7,500
			19,950

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name

