



Airconditioning & Refrigeration Services
B72 L22 17th., Brgy. 183 Villamor Pasay city Metro Manila 1300
Cellphone: 0917-1225048/ 0999-5573715
Email: zeusrafann053012@gmail.com / carcillarooffice01@gmail.com

*SUPPLY	*INSTALLATION	*CHECK-UP	*CLEANING	*PREVENTIVE MAINTENANCE
---------	---------------	-----------	-----------	-------------------------

Installation Quotation

Simon, JG / Trina
52 Washington St., Merville Park, Brgy. Merville, PARAÑAQUE CITY
0967-1185333

July 28, 2025
AIQ 25-00026

Project name: Option 2: Installation of Kolin Aircon

Description		QTY	
ACU 1 (Master's Bedroom)	KSG-IWF-30WFY8K1M32	1	
Estimated Pipe Length	=	23ft	
Estimated Royal Cord Length	=	32ft	
Basic Installation (10ft copper tubing and communication wire)			8,500.00
Installation materials	Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)	1/4"X5/8" new	13ft	400/ft
Royal Cord (excess of 10ft)	2.00mm2X4C	22ft	100/ft
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc
			8,000.00
TOTAL			16,500.00
ACU 2 (Guest Room)	KSG-IWF-20WFY8K1M32	1	
Estimated Pipe Length	=	11ft	
Estimated Royal Cord Length	=	19ft	
Basic Installation (10ft copper tubing and communication wire)			7,500.00
Installation materials	Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)	1/4"X1/2" new	1ft	350/ft
Royal Cord (excess of 10ft)	2.00mm2X4C	9ft	100/ft
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft
PVC Blue Pipe	Blue pipe 3/4"	1pc	200/pc
			1,650.00
TOTAL			9,150.00
ACU 3 (Bedroom 3)	KSG-IWF-30WFY8K1M32	1	
Estimated Pipe Length	=	21ft	
Estimated Royal Cord Length	=	31ft	
Basic Installation (10ft copper tubing and communication wire)			8,500.00
Installation materials	Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)	1/4"X5/8" new	11ft	400/ft
Royal Cord (excess of 10ft)	2.00mm2X4C	21ft	100/ft
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc
			7,100.00
TOTAL			15,600.00
ACU 4 (Family Room)	KSG-IWF-20WFY8K1M32	1	
Estimated Pipe Length	=	35ft	
Estimated Royal Cord Length	=	41ft	
Basic Installation (10ft copper tubing and communication wire)			7,500.00
Installation materials	Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)	1/4"X1/2" new	25ft	350/ft
Royal Cord (excess of 10ft)	2.00mm2X4C	31ft	100/ft
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4	50/ft
PVC Blue Pipe	Blue pipe 3/4"	2pc	200/pc
			12,450.00
TOTAL			19,950.00
ACU 5 (Dining Room)	KL-IF60- G6H1M32	1	
Estimated Pipe Length	=	49ft	
Estimated Royal Cord Length	=	55ft	
Basic Installation (10ft copper tubing and communication wire)			14,000.00
Installation materials	Description	QTY	Price Per QTY
Copper Tubing (excess of 10ft)	3/8"X3/4" new	39ft	400/ft
Royal Cord (excess of 10ft)	2.00mm2X4C	45ft	100/ft
Wire (Royal Cord-Breaker to ODU)	5.5mm x 3	4ft	50/ft
PVC Blue Pipe	Blue pipe 3/4"	2pcs	200/pc
			20,700.00

TOTAL	34,700.00
TOTAL CHARGES	95,900.00

Bank details
China Bank Corporation
Account Name: Carcillar Airconditioning and Refrigeration Services
143602005343

GCASH
0999-5573715
Rafael Carcillar

Prepared by:

Melissa de Castro
Office Admin

Conformed by:



CARCILLAR

Aireconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY

*SUPPLY

*INSTALLATION

*CHECK-UP

*CLEANING

*PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simm Date _____
Address _____ SJR No. _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 3 hp WM

Cooling Capacity Computation

Floor Area 36 sqm
Ceiling Height _____ mtr
note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area 36 x 550 Btu/h 19,800 Btu/h

Ceiling Height (excess of 3 mtrs.) _____ x 20% _____ Btu/h

Window Direct Sunlight 19,800 x 10% - 50% 1,980 Btu/h

Total Cooling Capacity _____ Btu/h

Add : Additional Heat Load

No. of Person 2 x 300 Btu/h 600 Btu/h

No. of Ordinary Light (<40w) 10 x 200 Btu/h 2,000 Btu/h

No. of Special Light (>40w) _____ x 400 Btu/h _____ Btu/h

No. of Refrigerator (< 6 cu ft.) _____ x 400 Btu/h _____ Btu/h

No. of Refrigerator (> 6 cu ft.) _____ x 800 Btu/h _____ Btu/h

No. of Cooking Range _____ x 1500 Btu/h _____ Btu/h

No. of Laptop Computer _____ x 150 Btu/h _____ Btu/h

No. of Desktop Computer _____ x 400 Btu/h _____ Btu/h

No. of Printer _____ x 500 Btu/h _____ Btu/h

No. of Photocopier _____ x 1000 Btu/h _____ Btu/h

Total Cooling Capacity 24,380 Btu/h

Recommended Cooling Capacity 2.7 hp

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Master 10m

Scope of Work Agreement

- | | | |
|-----------------------------------|--|---|
| 1. Copper tube lay-out | ☐ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☐ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☐ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☐ No |

Dimension :

7. Plastering, carpentry and restoration works are to be done by the customer.
8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer
10. Other concern: -chipping work, power supply provide client contractor



Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715


Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

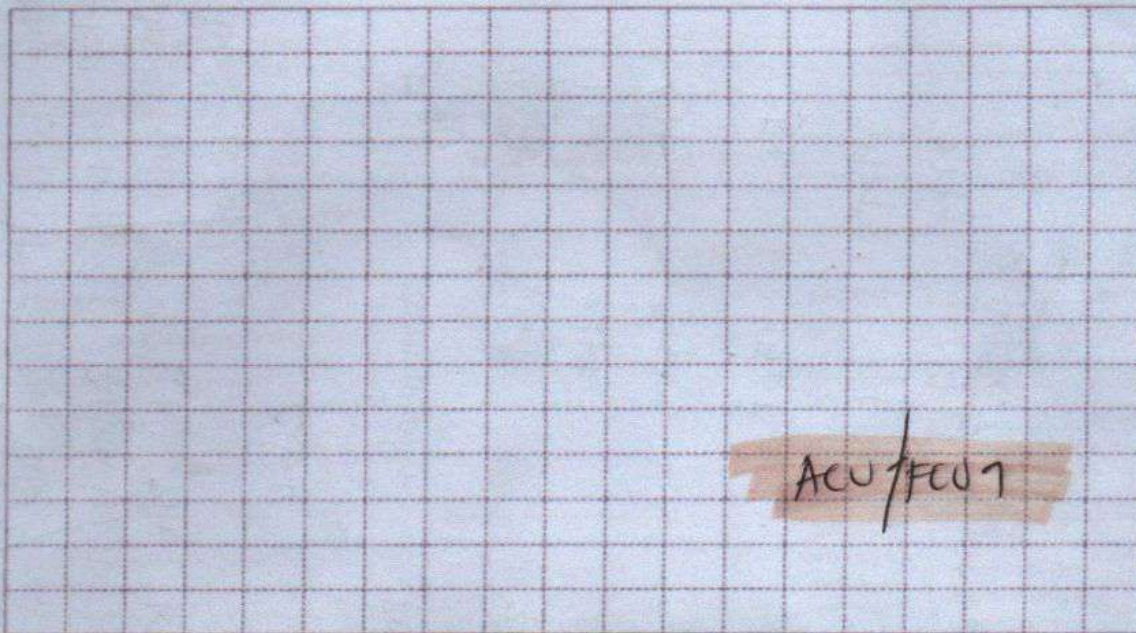

Indoor Unit Location
Outdoor Unit Location
Pipe Length
Special Note

- centro sa wall ng CR
- kansen ng bucket garden, 20cm from floor
- 23ft

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5 5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (VAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4" 1"		
PVC Pipe (electrical)			
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air conditioner)			
Initial Charge			
TOTAL ESTIMATE			P 16,500

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simon TG Date _____
Address _____ SJR No _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 2hp WM

Cooling Capacity Computation

Floor Area 18.5 sqm
Ceiling Height _____ mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area 18.5 x 550 Btu/h 10,175 Btu/h
Ceiling Height (excess of 3 mtrs.) _____ x 20% _____ Btu/h
Window Direct Sunlight 10,175 x (30% - 50%) 3,052.5 Btu/h
Total Cooling Capacity _____ Btu/h

Add : Additional Heat Load

No. of Person 2 x 300 Btu/h 600 Btu/h
No. of Ordinary Light (<40w) 6 x 200 Btu/h 1,200 Btu/h
No. of Special Light (>40w) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (< 6 cu ft) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (> 6 cu ft) _____ x 800 Btu/h _____ Btu/h
No. of Cooking Range _____ x 1500 Btu/h _____ Btu/h
No. of Laptop Computer _____ x 150 Btu/h _____ Btu/h
No. of Desktop Computer _____ x 400 Btu/h _____ Btu/h
No. of Printer _____ x 500 Btu/h _____ Btu/h
No. of Photocopier _____ x 1000 Btu/h _____ Btu/h
Total Cooling Capacity 15,025 Btu/h

Recommended Cooling Capacity

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern

- CHIPPING WORK c/o CLIENT CIVIL CONTRACTOR
- POWER SUPPLY c/o CLIENT CONTRACTOR
- DRAIN PIPE END, FINISH BY CONTRACTOR

TO ALL UNITS



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

1 ACU/FCU 2

Indoor Unit Location - INDOOR UNIT LOCATE 30CM FROM SLIDING DOOR
 Outdoor Unit Location - RIGHT OF SLIDING DOOR 30CM
 Pipe Length - 11 FT
 Special Note - FROM FLOOR 20CM HEIGHT PAAS

Installation Cost Estimate			
Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330 2430 2520 3520 4620	350	350
Wire (Royal Cord signal wire) (excess of 10ft.)	2 0mmx4C	160	320
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	50	200
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1" 3/4" 1"		200
PVC Pipe (electrical)	3/4" 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air conditioner)			
Initial Charge			7,100
TOTAL ESTIMATE			8,450

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name Simon Date _____
Address _____ SJR No. _____

Establishment Type Residential ☐ Area Surveyed _____
Commercial ☐ Area Surveyed _____

Recommended Product Model : 3hp Wm

Cooling Capacity Computation

Floor Area 36 sqm
Ceiling Height _____ mtr

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area	<u>36</u>	x	550 Btu/h	<u>19,800</u> Btu/h
Ceiling Height (excess of 3 mtrs.)		x	20%	<u>3,960</u> Btu/h
Window Direct Sunlight	<u>19,800</u>	x	20% 50%	<u>3,960</u> Btu/h
Total Cooling Capacity				<u>26,760</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u> Btu/h
No. of Ordinary Light (<40w)	<u>9</u>	x	200 Btu/h	<u>1,800</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>26,760</u> Btu/h

Recommended Cooling Capacity

2.9 hp Btu/h

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Bedroom 3

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern: same



CARCILLAR

Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafenn053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

Handwritten note on the grid: **#CU/ACU 3**

Indoor Unit Location

Outdoor Unit Location

Pipe Length

Special Note

- Sa ibabaw ng cabinet,
- Sa gilid ng salamin
- 21 FT
- Sila gagamit ng katapitan ng #CU

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2", 3/4"		
PVC Pipe (electrical)	3/4", 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air-conditioner)			
Initial Charge			
TOTAL ESTIMATE			

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name

15,600



Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name: SIMON, JG / TRINA Date: 7-26-25
Address: C2 WASHINGTON ST. MEDEVILLE SJR No: #0-00265672
Establishment Type: ☒ Residential ☐ Commercial Area Surveyed: _____
Recommended Product Model: 2hp WM

Cooling Capacity Computation

Floor Area: 24 sqm
Ceiling Height: _____ mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Item	Value	Unit	Result
Floor Area	24	sqm	13,200 Btu/h
Ceiling Height (excess of 3 mtrs.)		mtr	20% Btu/h
Window Direct Sunlight	13,200	Btu/h	2,640 Btu/h
Total Cooling Capacity		Btu/h	
Add : Additional Heat Load			
No. of Person	2		300 Btu/h
No. of Ordinary Light (<40w)	7		200 Btu/h
No. of Special Light (>40w)			400 Btu/h
No. of Refrigerator (< 6 cu ft)			400 Btu/h
No. of Refrigerator (> 6 cu ft)			800 Btu/h
No. of Cooking Range			1500 Btu/h
No. of Laptop Computer			150 Btu/h
No. of Desktop Computer			400 Btu/h
No. of Printer			500 Btu/h
No. of Photocopier			1000 Btu/h
Total Cooling Capacity		Btu/h	18,240
Recommended Cooling Capacity		Btu/h	2.0hp

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☐ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension : _____

7. Plastering, carpentry and restoration works are to be done by the customer.
8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
10. Other concern: _____

Chipping works, power supply, ~~drain~~ provide by client
contract
drain and long hose, sila na ang maghahatag sa pinaka
malapit na drainage

Family Room
ACU / FCU 6



Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
 * Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY

*SUPPLY

*INSTALLATION


*CHECK-UP

*CLEANING

*PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

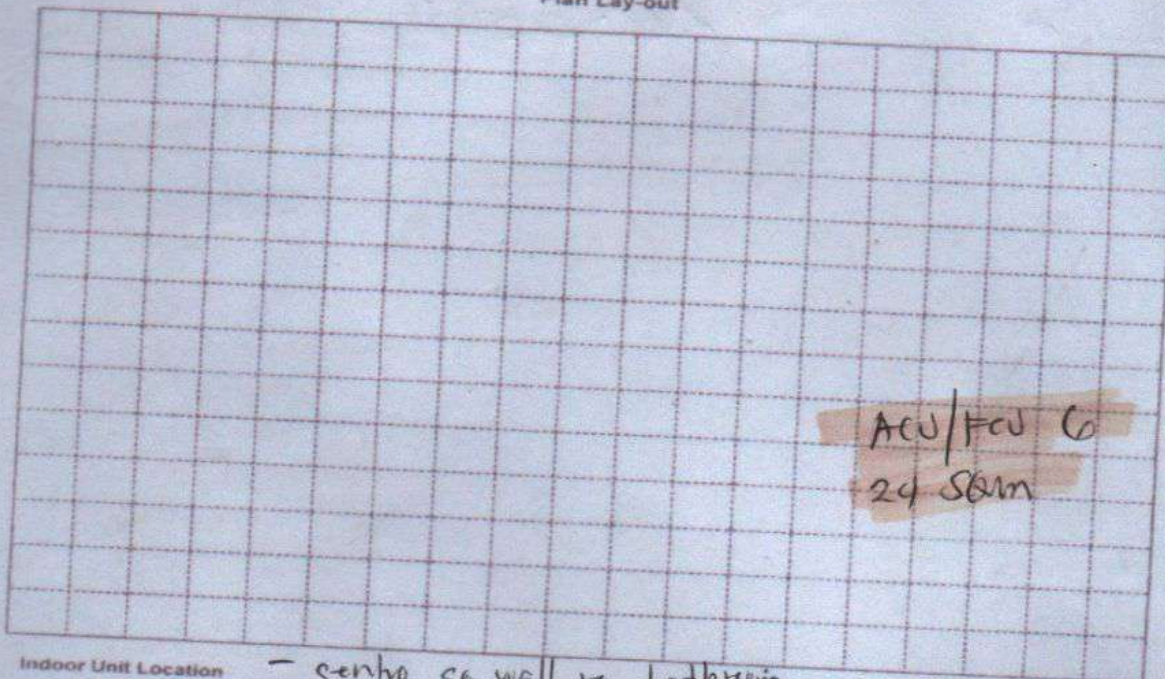

ACU/FCU 6
 24 SQm

Indoor Unit Location

- centro sa wall ng bathroom

Outdoor Unit Location

- ilalim ng bubing, pantay sa flooring na bahay (lock)

Pipe Length

- 35 ft

Special Note

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft)	2 0mmx4C	25	350
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	31	100
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph	4	50
Bracket (ODU)	(Imptd / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4"		
PVC Pipe (electrical)	3/4" 1"		
Drain Pump		2	200
Drain Pump Hose			
Chipping Works			
Dismantling Fee (existing air-conditioner)	mtl		
Initial Charge			
TOTAL ESTIMATE			7,500
			19,950

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Confirms:

Signature Over Printed Name



Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300
Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY *SUPPLY *INSTALLATION *CHECK-UP *CLEANING *PREVENTIVE MAINTENANCE

SURVEY FORM

Customer Name: Sawu Date: _____
Address: _____ SJR No: _____

Establishment Type: Residential ☐ Area Surveyed: _____
Commercial ☐ Area Surveyed: _____

Recommended Product Model: Chep Fm option 2

Cooling Capacity Computation

Floor Area: 70 sqm
Ceiling Height: _____ mtr

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area	<u>70</u>	x	550 Btu/h	<u>38,500</u> Btu/h
Ceiling Height (excess of 3 mtrs.)	<u>38,500</u>	x	20%	<u>7,700</u> Btu/h
Window Direct Sunlight	<u>38,500</u>	x	20% - 50%	<u>19,500</u> Btu/h
Total Cooling Capacity				<u>71,500</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>10</u>	x	300 Btu/h	<u>3000</u> Btu/h
No. of Ordinary Light (<40w)	<u>15</u>	x	200 Btu/h	<u>3000</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>71,500</u> Btu/h

Recommended Cooling Capacity

71,500 Btu/h
7.7 hp

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length

Scope of Work Agreement

- | | | |
|-----------------------------------|--|---|
| 1. Copper tube lay-out | ☐ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☐ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☐ No |
| 4. Service Ledge | ☐ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☐ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern:

2nd option dining area
Chep floor mounted



CARCILLAR

Airconditioning & Refrigeration Services

B72 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel#: (02) 8253-4637

Email: zeusrafann053012@gmail.com

*SURVEY

*SUPPLY

*INSTALLATION


*CHECK-UP

*CLEANING

*PREVENTIVE MAINTENANCE

SURVEY FORM

Plan Lay-out

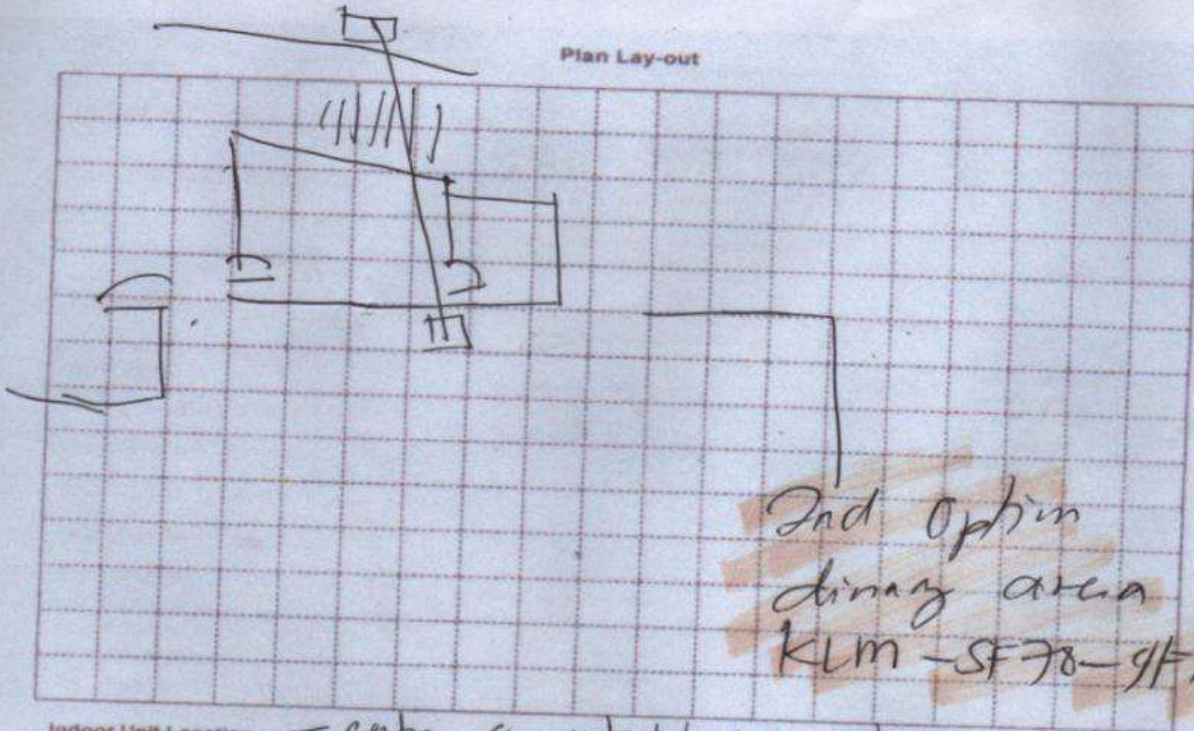

Indoor Unit Location

— centro sa pagdalawing pinto

Outdoor Unit Location

Pipe Length

Special Note

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord, signal wire) (excess of 10ft)	2.0mmx4C	39	760
Wire (Royal Cord - Breaker to ODU)	3.5mm 15.5mm x 3C	45	100
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph	4	50
Bracket (ODU)	(Impts / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4"		
PVC Pipe (electrical)	3/4" 1"		
Drain Pump		1	200
Drain Pump Hose			200
Chipping Works			
Dismantling Fee (existing air-conditioner)	mtl		
Initial Charge			14000
TOTAL ESTIMATE			34,600

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Customer Conforms:

Signature Over Printed Name

Signature Over Printed Name

