





Versamatch series

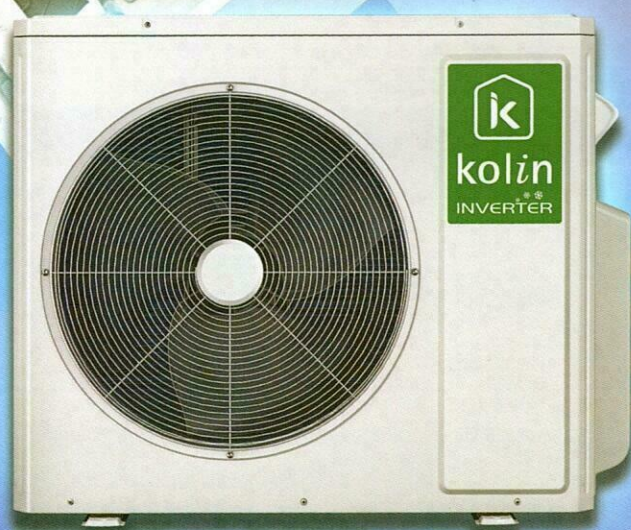


Wall Mounted

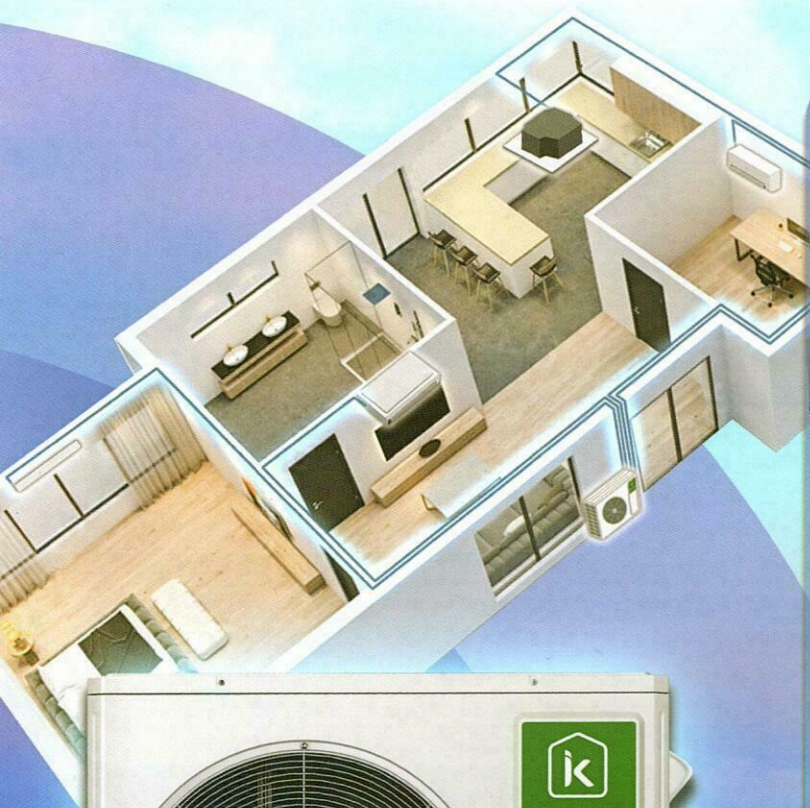

Floor/Ceiling



Ceiling Cassette

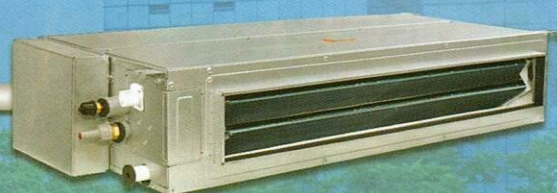

Ceiling Concealed

**Versatile Air Conditioner
Tailored for You**

Versamatch series

Transform your space with the Kolin Versamatch Air Conditioner, suitable for limited outdoor space. This newest series allows you to connect various indoor units such as Wall Mounted, Ceiling Cassette, Floor/Ceiling, and Ceiling Concealed models to just one outdoor unit, keeping your spaces neat and organized.

Each indoor unit offers features that ensure comfort and versatility. The Wall Mounted has an **ionizer** that helps remove dust and particles for cleaner air, along with a **stylish design**. The Ceiling Cassette spreads air evenly in every direction with its **360° airflow feature**, eliminating warm spots, and includes a **built-in drain pump** for hassle-free operation. The Floor/Ceiling unit provides **four-way airflow**, fitting into various room layouts with its **versatile installation**. Lastly, the Ceiling Concealed unit blends into the ceiling for a clean look, is suitable for limited indoor space, and includes a **wired controller** for easy operation and monitoring.

Enjoy a peaceful and comfortable environment with the Versamatch Series, which offers **full standard cooling capacity**, **quiet operation** for a more peaceful environment, promoting **eco-friendly R32 refrigerant**, **self-diagnosis feature**, and a **wide voltage range** for durability.

Elevate your space with the Kolin Versamatch Air Conditioner and discover the new versatile, convenient, and efficient way to stay cool.

SPECIFICATIONS

CEILING CASSETTE INDOOR UNIT



360°
AIRFLOW



as low as
30 dB(A)
QUIET
OPERATION



BUILT-IN
DRAIN PUMP

MODEL	KVM-10ISAH-I	KVM-15ISAH-I	KVM-20ISAH-I	KVM-25ISAH-I
Nominal Capacity	1.0 hp	1.5 hp	2.0 hp	2.5 hp
Cooling Capacity	9,495 kJ/h	12,660 kJ/h	18,990 kJ/h	23,210 kJ/h
Power Supply	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz
Unit Dimension	570 x 570 x 265 mm	570 x 570 x 265 mm	570 x 570 x 265 mm	840 x 840 x 240 mm
Package Dimension	698 x 653 x 295 mm	698 x 653 x 295 mm	698 x 653 x 295 mm	963 x 963 x 325 mm
Panel Dimension	620 x 620 x 47.5 mm	620 x 620 x 47.5 mm	620 x 620 x 47.5 mm	950 x 950 x 52 mm
Panel Packaging Dimension	701 x 701 x 125 mm	701 x 701 x 125 mm	701 x 701 x 125 mm	1038 x 1033 x 112 mm
Net / Gross Weight	17 / 22 kg	17 / 22 kg	17 / 22 kg	29 / 36 kg
Sound Pressure Level	38 / 34 / 30 dB(A)	38 / 34 / 30 dB(A)	39 / 34 / 30 dB(A)	43 / 40 x 38 dB(A)
Copper Tube (High Side / Low Side)	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 1/2"	Ø 1/4" / Ø 5/8"


CEILING CONCEALED INDOOR UNIT



*1.0 hp & 1.5 hp



*2.0 hp



SPACE SAVING
DESIGN



as low as
22 dB(A)
QUIET
OPERATION




WIRED
CONTROLLER

MODEL	KVM-10IDAH-I	KVM-15IDAH-I	KVM-20IDAH-I
Nominal Capacity	1.0 hp	1.5 hp	2.0 hp
Cooling Capacity	9,495 kJ/h	12,660 kJ/h	18,990 kJ/h
Power Supply	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz
Unit Dimension	710 x 450 x 200 mm	710 x 450 x 200 mm	1010 x 450 x 200 mm
Package Dimension	1008 x 568 x 275 mm	1008 x 568 x 275 mm	1308 x 568 x 275 mm
Net / Gross Weight	18.5 / 22.5 kg	19 / 24 kg	25 / 30 kg
Sound Pressure Level	28 / 25 / 22 dB(A)	36 / 33 / 29 dB(A)	32 / 29 / 26 dB(A)
Copper Tube (High Side / Low Side)	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 1/2"

*Product features and specification are subject to change without prior notice.

**For maximum energy savings and for health reasons, ideal temperature is between 23-25°C.

BENEFITS

 Offers versatility by allowing four-types of indoor unit in just one outdoor unit.

 Suitable for larger spaces with multiple rooms:

 Provides space efficiency while maximizes comfort.

 Ensures efficient cooling and flexible installation.



Legend:
IDU - Indoor Unit
ODU - Outdoor Unit

WALL MOUNTED INDOOR UNIT



IONIZER



as low as
28 dB(A)
QUIET
OPERATION



STYLISH
DESIGN

MODEL	KVM-10IWAH-I	KVM-15IWAH-I	KVM-20IWAH-I	KVM-25IWAH-I
Nominal Capacity	1.0 hp	1.5 hp	2.0 hp	2.5 hp
Cooling Capacity	9,495 kJ/h	12,660 kJ/h	18,990 kJ/h	23,210 kJ/h
Power Supply	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz
Unit Dimension	783 x 185 x 260 mm	835 x 200 x 275 mm	943 x 246 x 333 mm	1078 x 246 x 333 mm
Package Dimension	828 x 332 x 258 mm	895 x 345 x 271 mm	1001 x 405 x 322 mm	1133 x 414 x 333 mm
Net / Gross Weight	8 / 9.5 kg	9 / 11 kg	13 / 15.5 kg	15 / 18 kg
Sound Pressure Level	39 / 35 / 28 dB(A)	39 / 35 / 30 dB(A)	45 / 41 / 35 dB(A)	46 / 41 / 37 dB(A)
Copper Tube (High Side / Low Side)	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 1/2"	Ø 1/4" / Ø 5/8"

FLOOR / CEILING INDOOR UNIT



FOUR-WAY
AIRFLOW



as low as
26 dB(A)
QUIET
OPERATION



VERSATILE
INSTALLATION

MODEL	KVM-10ICAH-I	KVM-15ICAH-I	KVM-20ICAH-I	KVM-25ICAH-I
Nominal Capacity	1.0 hp	1.5 hp	2.0 hp	2.5 hp
Cooling Capacity	9,495 kJ/h	12,660 kJ/h	18,990 kJ/h	23,210 kJ/h
Power Supply	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz
Unit Dimension	870 x 235 x 665 mm	870 x 235 x 665 mm	870 x 235 x 665 mm	1200 x 235 x 665 mm
Package Dimension	1033 x 770 x 300 mm	1033 x 770 x 300 mm	1033 x 770 x 300 mm	1363 x 770 x 300 mm
Net / Gross Weight	25 / 30 kg	25 / 30 kg	25.5 / 30.5 kg	33 / 40 kg
Sound Pressure Level	35 / 30 / 26 dB(A)	35 / 30 / 26 dB(A)	35 / 30 / 26 dB(A)	35 / 31 / 27 dB(A)
Copper Tube (High Side / Low Side)	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 3/8"	Ø 1/4" / Ø 1/2"	Ø 3/8" / Ø 5/8"

*Product features and specification are subject to change without prior notice.

**For maximum energy savings and for health reasons, ideal temperature is between 23-25°C.

FEATURES

INVERTER

Versamatch

Normal Split Type AC

Space Saving Design

Versatile Outdoor



*except ceiling concealed

SPECIFICATIONS

OUTDOOR UNIT



*2.0 hp & 3.0 hp




























































*4.0 & 5.0 hp

MODEL	KVM-20VAHIM-O	KVM-30VAHIM-O	KVM-40VAHIM-O	KVM-50VAHIM-O
Nominal Capacity	2.0 hp	3.0 hp	4.0 hp	5.0 hp
Cooling Capacity	18,990 kJ/h	28,485 kJ/h	37,980 kJ/h	47,475 kJ/h
Power Supply	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz	1 Ph / 230 V / 60 Hz
Rated Power	1,600 W	2,200 W	3,600 W	4,600 W
Rated Current	8 A	10 A	12 A	15 A
Unit Dimension	822 x 352 x 550 mm	964 x 402 x 660 mm	964 x 402 x 660 mm	1020 x 427 x 826 mm
Package Dimension	872 x 398 x 620 mm	1032 x 456 x 737 mm	1032 x 456 x 737 mm	1093 x 497 x 885 mm
Net / Gross Weight	31 / 33.5 kg	47.5 / 52 kg	51 / 55.5 kg	73 / 80 kg
Refrigerant Type / Charge	R32 / 0.75 kg	R32 / 1.70 kg	R32 / 1.80 kg	R32 / 2.40 kg
Maximum Indoor Connection	2	3	4	5
Over-all pipe length	40 m	60 m	70 m	100 m
Maximum Distance between (Indoor to Outdoor)	20 m	20 m	20 m	25 m
Maximum Height between (Indoor to Outdoor)	15 m	15 m	15 m	20 m
Copper Tube Size (High Side / Low Side)	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"
	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"
		ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"
			ø 1/4" / ø 3/8"	ø 1/4" / ø 3/8"
Circuit Breaker	30 A	30 A	40 A	40 A

*Product features and specification are subject to change without prior notice.

COMBINATIONS FOR OUTDOOR AND INDOOR

NOMINAL CAPACITY	1.0 hp				1.5 hp			
MODEL	Wall Mounted	Ceiling Cassette	Floor/Ceiling	Ceiling Concealed	Wall Mounted	Ceiling Cassette	Floor/Ceiling	Ceiling Concealed
 2.0 hp								
 3.0 hp	 	 	 	 				
 4.0 hp	 	 	 	 	 	 	 	 
 5.0 hp	  	  	  	  	 	 	 	 
								

Note: The suggested combinations are subject to site conditions and user can match available model and capacity of indoor unit based on the Outdoor unit. Please contact our In-house technician or Authorized service partners for further details.

Versamatch

Multi-Split Air Conditioner

REGULAR SPLIT TYPE AIR CONDITIONER

Multiple Indoor and Outdoor



VS



COMBINATIONS FOR OUTDOOR AND INDOOR

NOMINAL CAPACITY	2.0 hp				2.5 hp		
MODEL	Wall Mounted	Ceiling Cassette	Floor/Ceiling	Ceiling Concealed	Wall Mounted	Ceiling Cassette	Floor/Ceiling
 2.0 hp							
 3.0 hp							
 4.0 hp							
							
							
 5.0 hp							
							
							
							
							

Note: The suggested combinations are subject to site conditions and user can match available model and capacity of indoor unit based on the Outdoor unit. Please contact our In-house technician or Authorized service partners for further details.

SERVICE CENTER

MAKATI OFFICE

Kolin Bldg.
1854 Sta. Rita St., Guadalupe
Nuevo, Makati City, 1212
(632) 8852 - 6868

PAMPANGA

LRK Commercial Bldg., Jose Abad
Ave., Lagundi, Mexico, Pampanga
(045) 455 - 2934

DAGUPAN

Unit #1 107 Caranglaan
District, Dagupan City,
Pangasinan
(075) 529 - 0587

BACOLOD

Door #A-2 & A-3 UTC Bldg.,
Alunan St., Brgy. 36,
Bacolod City
(034) 466 - 9145

ILOILO

Door #4, 5 & 7, D' Appliance
Arcade, South Fundidor,
Molo, Iloilo City
(033) 337 - 5314

CEBU

Lot 758-B-1, P. Suico St.,
Upper Tabok, Mandaue,
Cebu City
(032) 234 - 1844

DAVAO

Blk 17 Lot 9, Calamansi St.,
Juna Subd., Matina, Davao City
(082) 227 - 0048

CAGAYAN DE ORO


Door #3 De Oro Land Bldg.,
Julio Pacana St., Puntod,
Cagayan de Oro City
(088) 557 - 7353



OVER 250 AUTHORIZED SERVICE CENTERS NATIONWIDE

Exclusively Distributed by Kolin Philippines International, Inc.

Visit our website:

 www.kolinphil.com.ph

    [kolinphilippines](https://www.facebook.com/kolinphilippines)

VRSN00 111524