



February 9, 2026

AIRLIVE
UNIT 2604 PRESTIGE TOWER, ORTIGAS JR. ORTIGAS CENTER, SANT ANTONIO, PASIG CITY
TEL#: 0916-6194331
Email: ghemanalo@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

Table with 7 columns: QTY, U/M, MODEL / DESCRIPTION, SRP, DISCOUNTED PRICE, and AMOUNT. It lists two air conditioner models and their costs, including a total estimated cost of 343,952.40.

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
* Installation: Will be provided by assigned installer.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.
** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-12-25-0839-rev
MIS-24%/6.5K/7K

Conforme: SIGNATURE OVER PRINTED NAME



February 6, 2025
 Airlive
 Unit 2604 Prestige Tower, Ortigas Jr. Ortigas Center San Antonio, Pasig City
 0916-6194331
 ghemanal@gmail.com

MODEL	Qty
KL-IF60-G6HM32	1
KLM-IC60-AA1M32-I	1

OFFICE	Area	148 sqm
---------------	------	---------

ACU 1	6.0 HP Floor Ceiling Inverter	KLM- IC60-AA1M32-I	
	Estimated Pipe Length = 50 ft		
	Estimated Royal Cord Length = 57 ft		
	Initial Charge		P 15,000.00
	Includes:		
	Labor		
	10ft Copper Tube		
	10ft Royal Cord		
	Consumables		
	Installation Materials	Description	Qty Price per qty Subtotal
	Copper Tube	Ø 3/8" x Ø 5/8"	40 ft P 400.00/ft P 16,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	47 ft P 100.00/ft P 4,700.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft P 70.00/ft P 490.00
	Circuit Breaker waterproof	60A/1Ph	1 pc/s P 1,000.00/pc P 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s P 650.00/pc P 3,250.00
	Full thread	3/8" x 10'	3 pc/s P 150.00/pc P 450.00
	Metal Clamp	3"	6 pc/s P 120.00/pc P 720.00
	Outdoor bracket	Modified	1 pc/s P 1,500.00/pc P 1,500.00
	PVC blue	3/4" x 10'	4 pc/s P 150.00/pc P 600.00
	Drain Hose	White -1/2"	7 ft P 25.00/ft P 175.00
			P 28,885.00

Estimated Charges	P 43,885.00
--------------------------	-------------

ACU 2	6.0 HP Floor Standing Inverter	KL-IF60-G6HM32	
	Estimated Pipe Length = 85 ft		
	Estimated Royal Cord Length = 92 ft		
	Initial Charge		P 14,000.00
	Includes:		
	Labor		
	10ft Copper Tube		
	10ft Royal Cord		
	Indoor Bracket (Floor)		
	Consumables		
	Installation Materials	Description	Qty Price per qty Subtotal
	Copper Tube	Ø 3/8" x Ø 5/8"	75 ft P 400.00/ft P 30,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	82 ft P 100.00/ft P 8,200.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft P 70.00/ft P 490.00
	Circuit Breaker waterproof	60A/ 1Ph	1 pc/s P 1,000.00/pc P 1,000.00
	Outdoor bracket	Fabricated floor	1 pc/s P 2,500.00/pc P 2,500.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s P 650.00/pc P 6,500.00
	Full thread	3/8" x 10'	4 pc/s P 150.00/pc P 600.00
	Metal Clamp	3"	14 pc/s P 120.00/pc P 1,680.00
	Outdoor bracket	Modified	1 pc/s P 1,500.00/pc P 1,500.00
	PVC blue	3/4" x 10'	1 pc/s P 150.00/pc P 150.00
	Drain Hose	White -1/2"	7 ft P 25.00/ft P 175.00
			P 52,795.00

Estimated Charges	P 66,795.00
--------------------------	-------------

Additional labor for Night Schedule	P 5,000.00
--	------------


Total Estimated Charges	P 115,680.00
--------------------------------	--------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
 - 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
 - 3 Need for marking and site visit before installation.
 - 4 Coppertube expose inside the area.
 - 5 Need to operate at the same time to avoid undercapacity.
 - 6 **Working days: Saturday and Sunday 6am onwards with parking. Need working permit. Bring bolts and nuts And extra Angle Bar with grinder for the footings of Outdoor Units.**
 - 7 Mechanical Plans, Permits, Electrical permits not included.
 - 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
 - 9 Air conditioning drain line and Electrical power supply (feeder line) **230v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 10 **Final charges will be based on actual installation.**


Prepared by:

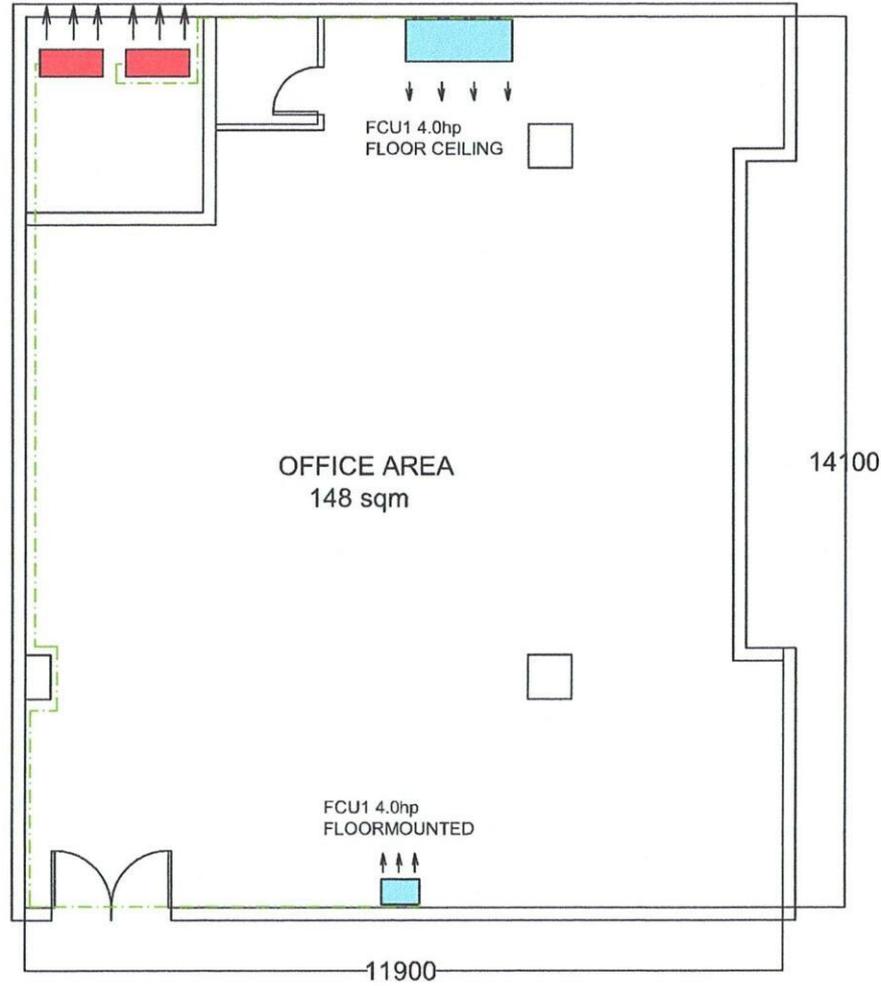

Jeffrey Dadios
Field Surveyor

Customer Conformee:

Signature Over Printed Name

Reviewed by:


Engr. Adrian Nogoy 02/07/2026
Project Engineer
Service Department



PROJECT TITLE:

AIRLIVE OFFICE AREA

PROJECT LOCATION:

UNIT 2604 PRESTIGE TOWER, ORTIGAS JR. ORTIGAS CENTER SAN ANTONIO, PASIG CITY

PROJECT OWNER:

SHEET CONTENTS

AC LAYOUT OF OFFICE AREA

DRAWN BY : AN

CHECKED BY : AN

SHEET NO.

A

01

01

PROJ NO.