




Creo SERIES

Your first step to **INVERTER** Cooling!

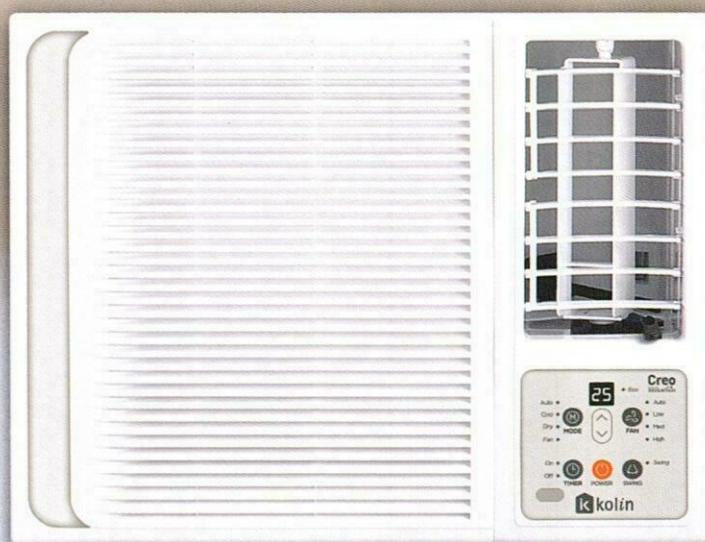

FULL DC
INVERTER



Extended Warranty
*Effective from January 2024.
Terms & conditions apply.

Creo SERIES



Abot kaya na ang inverter air conditioner with Kolin Creo Series!

Ideal for starting families, providing comfort while ensuring energy savings with an up-to **5.15 CSPF rating**. Packed with new features with its **high cooling capacity**, a **self-cleaning** function for healthier and cleaner air, and a **quiet operation** as low as 46 dB(A). Offering convenience with its **LED display**, **remote control**, **soft-touch panel**, and **24-hour timer** while promoting **eco-friendly R32 refrigerant**.

Discover more about your first step into inverter cooling with Kolin Creo Series, Ang Inverter na Swak sa Budget mo!

FEATURES



SPECIFICATION

MODEL	KA-75MCARINV32	KA-100MCARINV32	KA-150MCARINV32	KA-200MCARINV32
Nominal Capacity	0.75 hp	1.0 hp	1.5 hp	2.0 hp
Cooling Capacity	8,400 (2,520 - 9,240) kJ/h	9,700 (2,910 - 10,670) kJ/h	12,800 (3,840 - 14,080) kJ/h	19,800 (5,940 - 21,780) kJ/h
Power Supply	1Ph / 230V / 60Hz	1Ph / 230V / 60Hz	1Ph / 230V / 60Hz	1Ph / 230V / 60Hz
Input Current	2.84 A	3.50 A	5.57 A	7.30 A
Power Input	590 (118 - 708) W	750 (150 - 900) W	1,170 (234 - 1,404) W	1,560 (312 - 1,872) W
CSPF Rating	5.15	4.74	4.58	5.0
Star Rating	★★★★★	★★★★★	★★★★★	★★★★★
Refrigerant (Type / Charge)	R-32 / 420 g	R-32 / 420 g	R-32 / 470 g	R-32 / 730 g
Area (Unloaded Space)	8 - 12 m ²	13 - 17 m ²	18 - 22 m ²	23 - 32 m ²
Sound Level (Hi/Mi/Lo)	52 / 49 / 47 dB(A)	52 / 49 / 47 dB(A)	53 / 51 / 46 dB(A)	55 / 52 / 48 dB(A)
Unit Weight (Net/Gross)	30.6 / 33.0 kg	30.6 / 33.0 kg	30.7 / 33.1 kg	52.3 / 56.8 kg
Unit Dimension (WxDxH)	450.6 x 675 x 350 mm 17.7 x 26.6 x 13.8 in	450.6 x 675 x 350 mm 17.7 x 26.6 x 13.8 in	450.6 x 675 x 350 mm 17.7 x 26.6 x 13.8 in	660 x 780 x 428 mm 26 x 30.7 x 16.8 in
Package Dimension (WxDxH)	743 x 530 x 435 mm 29.2 x 20.8 x 17.1 in	743 x 530 x 435 mm 29.2 x 20.8 x 17.1 in	743 x 530 x 435 mm 29.2 x 20.8 x 17.1 in	915 x 770 x 510 mm 36 x 30.3 x 20 in

*Product features and specification are subject to change without prior notice.

**For maximum energy savings and for health reasons, ideal temperature is between 23-25°C.

SERVICE CENTER

MAKATI OFFICE

Kolin Bldg.
1854 Sta. Rita St., Guadalupe
Nuevo, Makati City, 1212
(632) 8852 - 6868

PAMPANGA

LRK Commercial Bldg., Jose Abad
Ave., Lagundi, Mexico, Pampanga
(045) 455 - 2934

DAGUPAN

Unit #1107 Caranglaan
District, Dagupan City,
Pangasinan
(075) 529 - 0587

BACOLOD

Door #A-2 & A-3 UTC Bldg.,
Alunan St., Brgy. 36,
Bacolod City
(034) 466 - 9145

ILOILO

Door #4, 5 & 7, D' Appliance
Arcade, South Fundidor,
Molo, Iloilo City
(033) 337 - 5314

CEBU

Lot 758-B-1, P. Suico St.,
Upper Tabok, Mandaue,
Cebu City
(032) 234 - 1844

DAVAO

Blk 17 Lot 9, Calamansi St.,
Juna Subd., Matina, Davao City
(082) 227 - 0048

CAGAYAN DE ORO

Door #3 De Oro Land Bldg.,
Julio Pacana St., Puntod,
Cagayan de Oro City
(088) 557 - 7353



kolin

OVER 250 AUTHORIZED SERVICE CENTERS NATIONWIDE

Exclusively Distributed by Kolin Philippines International, Inc.

Visit our website:

www.kolinphil.com.ph

[f](#) [i](#) [t](#) [v](#) [t](#) [kolinphilippines](#)

VRN00 120725