



December 17, 2025

PACIFIC PAINTS (BOYSEN) PHILS. INC.

SOLVENT BASED MANUFACTURING PLANT, BLK 1 LOT 2 FIRST ST., FCIE BRGY. LANGKAAN DASMARIÑAS CITY, CAVITE

ATTN: MR. RUEL SARTIGA

TEL#: 0960-3361343

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 2 (USING NEW MATERIALS)**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KS-IW25-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 23,800 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	50,995.00	30,736.30	PHP	61,472.60
TOTAL UNIT COST					PHP	61,472.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	22,450.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	83,922.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

**\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

\* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

\* Installation: Will be provided by assigned installer.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at [kmi\\_asst@kolinphil.com.ph](mailto:kmi_asst@kolinphil.com.ph)

Very Truly Yours,

  
JANELLEN S. LIM  
KMI-ASSISTANT

Noted By:  
  
MART NATHANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:  
  
MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-12-25-0840  
OMF-26%/7K

Conforme:

SIGNATURE OVER PRINTED NAME



Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

 [www.kolinphil.com.ph](http://www.kolinphil.com.ph) / [kolinphilippines](http://kolinphilippines)

December 17, 2025

MR. RUEL SARTIGA

Pacific Paint(BOYSEN) Phils. Inc Solvent Base Manufacturing Plant Block 1 Lot 2, First St.

Brgy Langkaan Dasmarinas City Cavite

0960-3361343

sartigaruel16gmail.com

Model Qty  
KSM-IW25-WCT10M1M32 2

OPTION 2

NEW MATERIALS

MCC Phase2 Area ≈


ACU 1	2.5hp Wallmounted Inverter	KSM-IW25-WCT10M1M32					
	Estimated Pipe Length :	12	ft				
	Estimated Royal Cord Length :	17	ft				
	Initial Charge					P	7,700.00
	Includes:						
	Labor						Less Outdoor
	10ft Copper Tube						Bracket
	10ft Royal Cord						
	Other Consumables						
	<b>Additional Charges</b>	<b>Description</b>	<b>Unit</b>	<b>Price Per Unit</b>	<b>Subtotal</b>		
	Copper Tube	1/4"x 1/2"	2 ft	P 350.00 / ft	P 700.00		
	Royal Cord	2.mm2 x 4C	5 ft	P 100.00 / ft	P 500.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00		
	Dismantle	Outdoor Only	1 pc(s)	P 1,250.00 / pc	P 1,250.00		
	Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00	P	2,875.00

Estimated Charges P 10,575.00

ACU 2	2.5hp Wallmounted Inverter	KSM-IW25-WCT10M1M32					
	Estimated Pipe Length :	15	ft				
	Estimated Royal Cord Length :	20	ft				
	Initial Charge					P	7,700.00
	Includes:						
	Labor						Less Outdoor
	10ft Copper Tube						Bracket
	10ft Royal Cord						
	Other Consumables						
	<b>Additional Charges</b>	<b>Description</b>	<b>Unit</b>	<b>Price Per Unit</b>	<b>Subtotal</b>		
	Copper Tube	1/4"x 1/2"	5 ft	P 400.00 / ft	P 2,000.00		
	Royal Cord	2.mm2 x 4C	5 ft	P 100.00 / ft	P 500.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00		
	Dismantle	Outdoor Only	1 pc(s)	P 1,250.00 / pc	P 1,250.00		
	Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00	P	4,175.00

Estimated Charges P 11,875.00



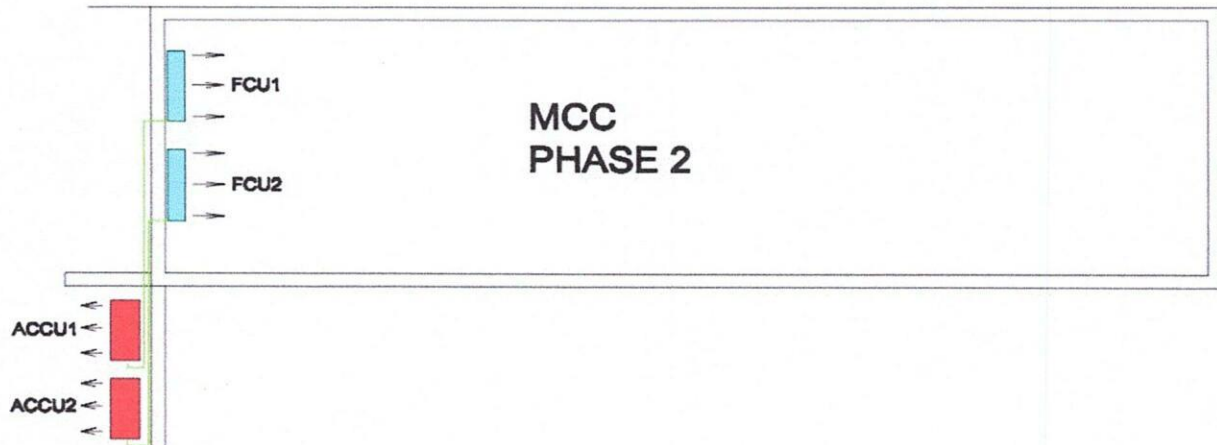

**Total Estimated Charges**

**P 22,450.00**

**Validity:** This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Note:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Lay out New Coppertube and wires, use existing wires for units grounding. Use existing Outdoor Breaker and Bracket.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking. Bring rope.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, is not included in the scope of work of Kolin.
- 8 Final charges will be based on actual installation.

Prepared by:

Jeffrey Dadios

Field Surveyor

Customer Conformee:

\_\_\_\_\_  
Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora



December 22, 2025

PACIFIC PAINTS (BOYSEN) PHILS. INC.  
SOLVENT BASED MANUFACTURING PLANT, BLK 1 LOT 2 FIRST ST., FCIE BRGY. LANGKAAN DASMARIÑAS CITY, CAVITE  
ATTN: MR. RUEL SARTIGA  
TEL#: 0960-3361343

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 2 (USING NEW MATERIALS)**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
6	UNIT/S	MODEL: KS-IW25-MCA1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 23,800 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	50,995.00	30,736.30	PHP	184,417.80
1	UNIT/S	MODEL: KS-IW15-MCA1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 12,880 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	33,995.00	18,656.30	PHP	18,656.30
TOTAL UNIT COST					PHP	203,074.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	207,675.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	410,749.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

**\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

\* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

\* Installation: Will be provided by assigned installer.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

**\*\* 10% DISCOUNT ON ACTUAL INSTALLATION CHARGES.**

Very Truly Yours,

JANELLEN S. LIM  
KMI-ASSISTANT

Noted By:  
MART NATHANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-12-25-0840-2  
OMF-26%/7K/6.5K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



DECEMBER 19, 2025  
MR. RUEL SARTIGA  
Pacific Paint(BOYSEN) Phils. Inc Solvent Base Manufacturing Plant Block 1 Lot 2, First St. FC  
Brgy Langkaan Dasmarinas City Cavite  
0960-3361343  
sartigaruel16gmail.com

KS-IW25-MCAI12O1M32 6  
KS-IW15-MCAI12O1M32 1

OPTION 2

NEW MATERIALS

**FG PHASE2** Area ≈

<b>ACU 1 1.5hp Wallmounted Inverter</b>		<b>KS-IW15-MCAI12O1M32</b>	
Estimated Pipe Length	10	ft	
Estimated Royal Cord Length	15	ft	
Initial Charge	(Php 7,500-Php800)		P 6,700.00
Includes:			Less Outdoor Bracket
Labor			
10ft Copper Tube			
10ft Royal Cord			
Other Consumables			
<b>Additional Charges</b>	<b>Description</b>	<b>Unit</b>	<b>Price Per Unit</b>
Royal Cord	2.mm2 x 4C	5 ft	P 100 / ft P 500
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft P 300
Dismantle	Outdoor Only	1 pc(s)	P 1,250 / pc P 1,250
Drain Hose	White -1/2"	7 ft	P 25 / ft P 175 P 2,225.00

**Estimated Charges** P **8,925.00**

**PRODUCTION OFFICE** Area ≈

<b>ACU 2 2.5hp Wallmounted Inverter</b>		<b>KS-IW25-MCAI12O1M32</b>	
Estimated Pipe Length	47	ft	
Estimated Royal Cord Length	52	ft	
Initial Charge	(Php 8,500-Php800)		P 7,700.00
Includes:			Less Outdoor Bracket
Labor			
10ft Copper Tube			
10ft Royal Cord			
Other Consumables			
<b>Additional Charges</b>	<b>Description</b>	<b>Unit</b>	<b>Price Per Unit</b>
Copper Tube	1/4"x 1/2"	37 ft	P 350 / ft P 12,950
Royal Cord	2.mm2 x 4C	42 ft	P 100 / ft P 4,200
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft P 300
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000 / pc P 1,000
Dismantle	1set	1 pc(s)	P 2,500 / pc P 2,500
Drain Hose	White -1/2"	7 ft	P 25 / ft P 175 P 21,125.00

**Estimated Charges** P **28,825.00**

**SERVER ROOM** Area ≈

<b>ACU 3 2.5hp Wallmounted Inverter</b>		<b>KS-IW25-MCAI12O1M32</b>	
Estimated Pipe Length	50	ft	
Estimated Royal Cord Length	55	ft	
Initial Charge	(Php 8,500-Php800)		P 7,700.00
Includes:			Less Outdoor Bracket
Labor			
10ft Copper Tube			
10ft Royal Cord			
Other Consumables			
<b>Additional Charges</b>	<b>Description</b>	<b>Unit</b>	<b>Price Per Unit</b>
Copper Tube	1/4"x 1/2"	40 ft	P 400 / ft P 16,000
Royal Cord	2.mm2 x 4C	45 ft	P 100 / ft P 4,500
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft P 300
Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000 / pc P 1,000
Dismantle	1set	1 pc(s)	P 2,500 / pc P 2,500
Drain Hose	White -1/2"	7 ft	P 25 / ft P 175 P 24,475.00

**Estimated Charges** P **32,175.00**

**ACU 4 2.5hp Wallmounted Inverter** **KS-IW25-MCAI12O1M32**

Estimated Pipe Length : 50 ft  
 Estimated Royal Cord Length : 55 ft  
 Initial Charge (Php 8,500-Php800) P 7,700.00  
 Includes: Less Outdoor Bracket

Labor  
 10ft Copper Tube  
 10ft Royal Cord  
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	40 ft	P 400 / ft	P 16,000
Royal Cord	2.mm2 x 4C	45 ft	P 100 / ft	P 4,500
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft	P 300
Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Dismantle	Outdoor Only	1 pc(s)	P 1,250 / pc	P 1,250
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				P 23,225.00

**Estimated Charges** P **30,925.00**

**CONTROL CENTER(1)** Area ≈

ACU 5 2.5hp Wallmounted Inverter KS-IW25-MCAI12O1M32  
 Estimated Pipe Length : 57 ft  
 Estimated Royal Cord Length : 62 ft  
 Initial Charge (Php 8,500-Php800) P 7,700.00  
 Includes: Less Outdoor Bracket

Labor  
 10ft Copper Tube  
 10ft Royal Cord  
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	47 ft	P 350 / ft	P 16,450
Royal Cord	2.mm2 x 4C	52 ft	P 100 / ft	P 5,200
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft	P 300
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Dismantle	1 set	1 pc(s)	P 2,500 / pc	P 2,500
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				P 25,625.00

**Estimated Charges** P **33,325.00**

**CONTROL CENTER(2)** Area ≈

ACU 6 2.5hp Wallmounted Inverter KS-IW25-MCAI12O1M32  
 Estimated Pipe Length : 66 ft  
 Estimated Royal Cord Length : 71 ft  
 Initial Charge (Php 8,500-Php800) P 7,700.00  
 Includes: Less Outdoor Bracket

Labor  
 10ft Copper Tube  
 10ft Royal Cord  
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	56 ft	P 400 / ft	P 22,400
Royal Cord	2.mm2 x 4C	61 ft	P 100 / ft	P 6,100
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60 / ft	P 300
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Dismantle	1set	1 pc(s)	P 2,500 / pc	P 2,500
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				P 32,475.00

**Estimated Charges** P **40,175.00**

**CONTROL CENTER(3)** Area ≈

ACU 7 2.5hp Wallmounted Inverter KS-IW25-MCAI12O1M32  
 Estimated Pipe Length : 57 ft  
 Estimated Royal Cord Length : 62 ft  
 Initial Charge (Php 8,500-Php800) P 7,700.00  
 Includes: Less Outdoor Bracket

Labor  
 10ft Copper Tube  
 10ft Royal Cord  
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	47 ft	P 350 / ft	P 16,450
Royal Cord	2.mm2 x 4C	52 ft	P 100 / ft	P 5,200

Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60	/ ft	P	300	
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000	/ pc	P	1,000	
Dismantle	1 set	1 pc(s)	P	2,500	/ pc	P	2,500	
Drain Hose	White -1/2"	7 ft	P	25	/ ft	P	175	P 25,625.00

<b>Estimated Charges</b>	<b>P</b>	<b>33,325.00</b>
--------------------------	----------	------------------

<b>Total Estimated Charges</b>	<b>P</b>	<b>207,675.00</b>
--------------------------------	----------	-------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Note:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Lay out New Coppertube and wires, use existing wires for units grounding. Use existing Outdoor Bracket.**
- 4 Working days: Monday to Saturday, 8am- 5pm with parking. Bring Rope for the outdoor units
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 8 Final charges will be based on actual installation.**

Prepared by:


**Jeffrey Dadios**  
Field Surveyor

Customer Conformer:

\_\_\_\_\_  
Signature Over Printed Name

Reviewed by:

**Engr. Kenneth Zamora**  
Service Supervisor

 12/22/2025



