

ATTN: MR. JOSEPH SY
San Simon Industrial Park
Contact#: 0917-850-9709

Sir,

Please find below the quotation of Air-conditioner as per survey results.

MODEL	DESCRIPTION	QTY	UNIT PRICE	DISCOUNTED PRICE	TOTAL
KLG-IF70-2C1M	5TR. FLOOR MOUNTED INVERTER AC	2	141,595.00	116,107.90	232,215.80
KSM-15MB1INV	1.5HP WALL MOUNTED INVERTER AC	1	33,215.00	27,236.30	27,236.30
KAG-150RSINV	1.5HP WINDOW TYPE INVERTER AC	4	27,950.00	22,919.00	91,676.00
KAG-240RSINV	2.5HP WINDOW TYPE INVERTER AC	1	40,450.00	33,169.00	33,169.00
Add: Estimated installation charge:					
For Living Room/Dining/Kitchen & Master's Bedroom					
	G/F Area 1 ACU 1 (KLG-IF70-2C1M)			15,200.00	
	G/F Area 2 ACU 2 (KLG-IF70-2C1M)			15,200.00	
	G/F Area 3 ACU 3 (KSM-15MB1INV)			8,600.00	
	G/F Area 4 ACU 4 (KAG-150RSINV)			1,000.00	
	G/F Area 5 ACU 5 (KAG-240RSINV)			1,000.00	
	2/F Area 1 ACU 6 (KAG-150RSINV)			1,000.00	
	2/F Area 2 ACU 7 (KAG-150RSINV)			1,000.00	
	2/F Area 3 ACU 8 (KAG-150RSINV)			1,000.00	
TOTAL ESTIMATED COST OF THE PROJECT					44,000.00
					428,297.10

Note: Prices are subject to change without prior notice.

Price is VAT Inclusive

Terms: Payment before delivery. If check subject for 3 days clearing

We thank you for giving us the opportunity to offer our product and services, hoping that we receive your purchase order.

If you need assistance don't hesitate to call the under signed at 852-6473.


Very truly yours,

JANNETH F. ROSALIO
Accounting Assistant

Approved by:


OLIVER M. FILOTEO
VP-Finance

Noted by:


MART NATHANIEL R. FLORES
Assistant Supervisor

KMI-QUOTE-02-17-078
18%-ECY

Conforme: _____
SIGNATURE OVER PRINTED NAME

JOSEPH SY

San Simon Industrial Park
0917-850-9709

Model	Quantity
KLG-IF70-2C1M	2
KSM-15MB1INV	1
KAG-150RSINV	4
KAG-240RSINV	1

Ground Floor Area 1	Area ≈ 79.31 sq.m
---------------------	-------------------

ACU 1	5 TR Floor Mounted Inverter	KLG-IF70-2C1M	
	Estimated pipe length = 15 ft		
	Estimated royal cord length = 40 ft		
	Initial charge		P 11,000.00
	Includes:		
	10 ft copper tube		
	10 ft royal cord		
	Circuit breaker (40 A - 1 phase)		
	Indoor bracket		
	Other consumables		

Additional charges	Description	Unit	Price per unit	Subtotal
Copper tube	3/4" x 3/8"	5 ft	P 300 / ft	P 1,500
Royal cord	2 mm ² x 4c	30 ft	P 30 / ft	P 900
Royal cord (ODU - breaker)	5.5 mm ² x 3c	5 ft	P 50 / ft	P 250
Drain Hose		2 m	P 25 / m	P 50
Outdoor Bracket		1 pc	P 1500 / pc	P 1,500
				4,200.00

Estimated charges	P 15,200.00
-------------------	-------------

Ground Floor Area 2	Area ≈ 80 sq.m
---------------------	----------------

ACU 2	5 TR Floor Mounted Inverter	KLG-IF70-2C1M	
	Estimated pipe length = 15 ft		
	Estimated royal cord length = 40 ft		
	Initial charge		P 11,000.00
	Includes:		
	10 ft copper tube		
	10 ft royal cord		
	Circuit breaker (40 A - 1 phase)		
	Indoor bracket		
	Other consumables		

Additional charges	Description	Unit	Price per unit	Subtotal
Copper tube	3/4" x 3/8"	5 ft	P 300 / ft	P 1,500
Royal cord	2 mm ² x 4c	30 ft	P 30 / ft	P 900
Royal cord (ODU - breaker)	5.5 mm ² x 3c	5 ft	P 50 / ft	P 250
Drain hose		2 m	P 25 / m	P 50
Outdoor Bracket		1 pc	P 1500 / pc	P 1,500
				4,200.00

Estimated charges	P 15,200.00
-------------------	-------------

Ground Floor Area 3	Area ≈ 19 sq.m
---------------------	----------------

ACU 3	1.5 hp Wall Mounted Inverter	KSM-15MB1INV	
	Estimated pipe length = 15 ft		
	Estimated royal cord length = 20 ft		
	Initial charge		P 7,000.00
	Includes:		
	10 ft copper tube		
	10 ft royal cord		
	Circuit breaker (20A)		
	Outdoor bracket		
	Other consumables		

Additional charges	Description	Unit	Price per unit	Subtotal
Copper tube	1/4" x 1/2"	5 ft	P 250 / ft	P 1,250
Royal cord	2 mm ² x 4c	10 ft	P 30 / ft	P 300
Drain Hose		2 m	P 25 / m	P 50
				1,600.00

Estimated charges	P 8,600.00
-------------------	------------

Ground Floor Area 4	Area ≈ 19 sq.m
---------------------	----------------

ACU 4	1.5 hp Window Type Inverter	KAG-150RSINV	
	Installation charge		P 700.00
	Angle bracket		300.00

Estimated charges	P 1,000.00
-------------------	------------

Ground Floor Area 5	Area ≈ 37.75 sq.m
---------------------	-------------------

ACU 5	2.5hp Window Type Inverter	KAG-240RSINV	
	Installation charge		P 700.00
	Angle bracket		300.00

Estimated charges	P 1,000.00
-------------------	------------

Total estimated charges (Ground)	P 41,000.00
----------------------------------	-------------

Second Floor Area 1			Area ≈ 20 sq.m	
ACU 6	1.5 hp Window Type Inverter	KAG-150RSINV		
	Installation charge		P	700.00
	Angle bracket			300.00
Estimated charges			P	1,000.00

Second Floor Area 2			Area ≈ 20 sq.m	
ACU 7	1.5 hp Window Type Inverter	KAG-150RSINV		
	Installation charge		P	700.00
	Angle bracket			300.00
Estimated charges			P	1,000.00

Second Floor Area 3			Area ≈ 20 sq.m	
ACU 8	1.5 hp Window Type Inverter	KAG-150RSINV		
	Installation charge		P	700.00
	Angle bracket			300.00
Estimated charges			P	1,000.00


Total estimated charges (Second)	P 3,000.00
----------------------------------	------------

Total estimated charges	P 44,000.00
-------------------------	-------------


Note:

- 1 Location of indoor and outdoor units are subject for further discussion.
- 2 AC Drain Lines will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Mechanical Plans, Permits, Electrical permits not included.
- 4 Masonry, carpentry, chipping & plastering (*finishing & restoration*) are not included in the installation.
- 5 Electrical power supply (*feeder line*) is not included in the scope of work of Kolin.
- 6 Final charges will be based on actual installation.

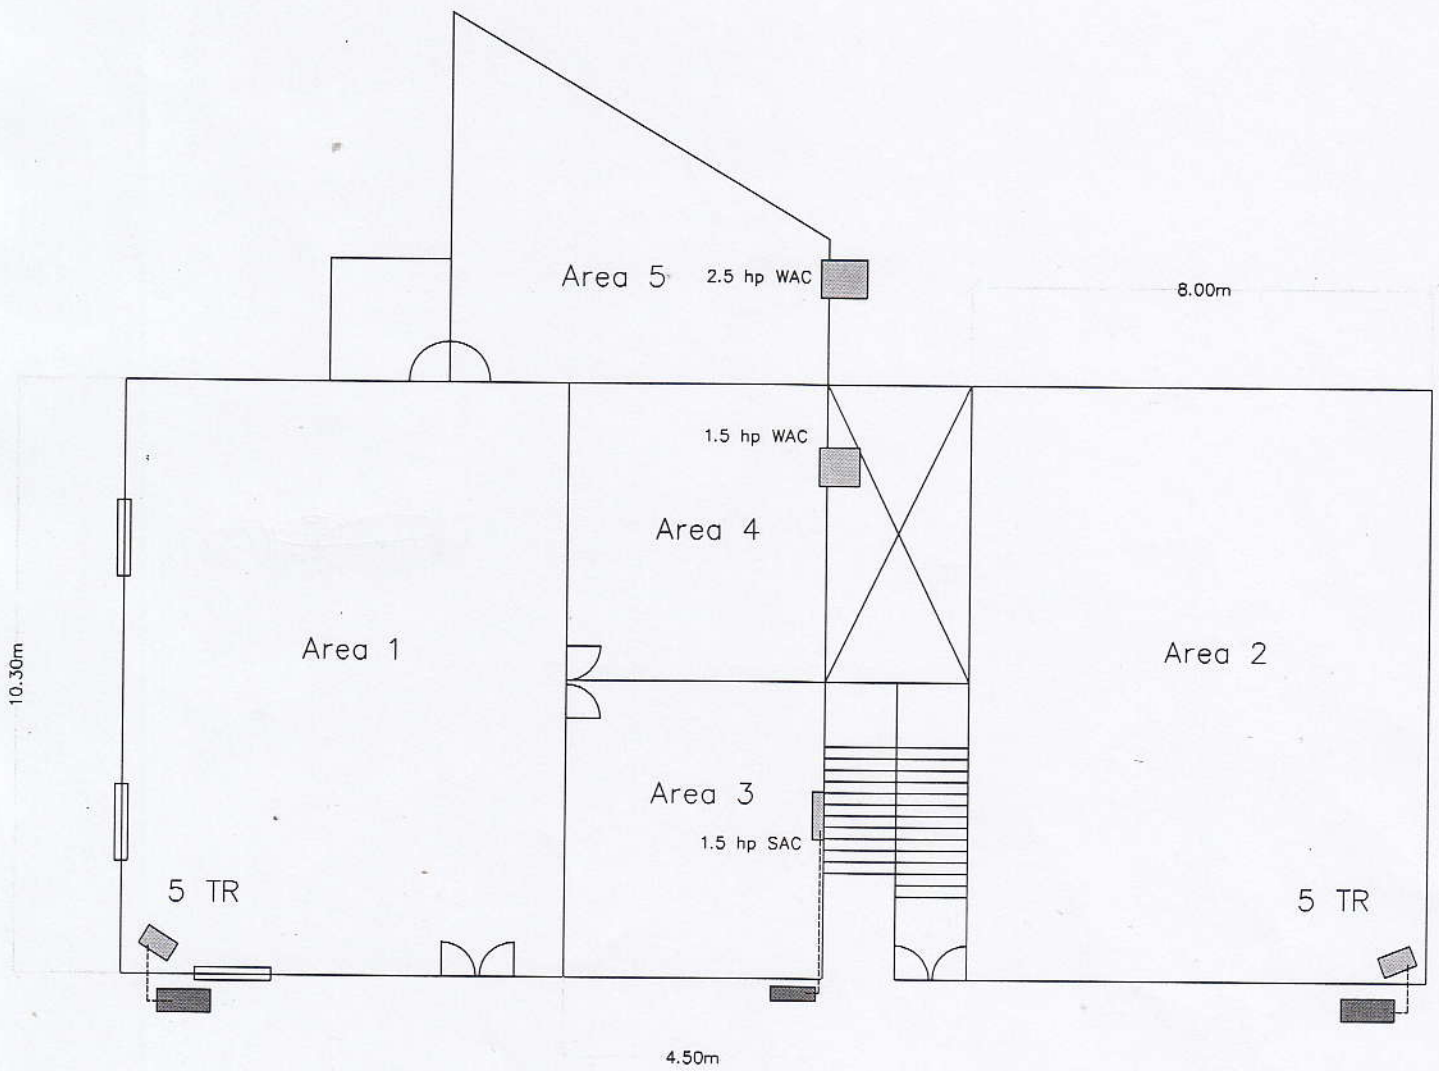
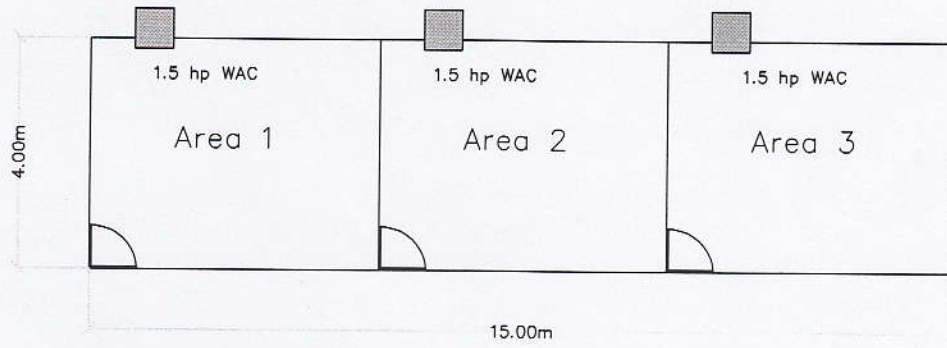
Prepared by:


Jorge Resley Mauricio
 Project Engineer

Noted by:


Engr. Jayrard Corona
 Senior Service Engineer

2nd Floor



Ground Floor