

kolin

air conditioner

July 31, 2024

MS. RUTH TIANGCO

B3 L10 LATOR ST. MCKINLEY WEST VILLAGE, FORT BONIFACIO, TAGUIG CITY

TEL#: 0905-3387308

Email: ruthationgco@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLM-IS60-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 55,503 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	154,995.00	120,896.10	PHP	120,896.10
1	UNIT/S	MODEL: KLM-IS40-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 37,980 Kj/h (3.0TR) INVERTER R-32	119,995.00	93,596.10	PHP	93,596.10
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10	PHP	81,292.10
6	UNIT/S	MODEL: KSG-IWF-25WVFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	298,896.60
1	UNIT/S	MODEL: KSG-IWF-20WVFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	42,484.10	PHP	42,484.10
1	UNIT/S	MODEL: KSG-IWF-15WVFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	32,344.10	PHP	32,344.10
TOTAL UNIT COST					PHP	669,509.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	350,710.00
TOTAL:					PHP	1,020,219.10
LESS : 7% DISCOUNT ON ESTIMATED COST OF INSTALLATION					PHP	(24,549.70)
TOTAL ESTIMATED COST OF THE PROJECT					PHP	995,669.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**


INSTALLATION C/O AUTHORIZED SERVICE CENTER.

****Actual 7% discount will be deducted on the final costing of installation based on actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI ASSISTANT

Noted by:


MART MANANIEL B. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-07-24-0641
ECY-22%/7K/4K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

July 15, 2024

RUTH TIANGCO

B3 L10 Lator St. McKinley West Village, Fort Bonifacio, Taguig City

0905-3387308

ruthationgco@gmail.com

MODEL	Qty
KLM-IS60-AA1M32	1
KLM-IS40-AA1M32	1
KLG-IF40-5G1M32	1
KSG-IWF-25WY8K1M32	6
KSG-IWF-20WY8K1M32	1
KSG-IWF-15WY8K1M32	1

GUESTROOM		Area	23 sqm
-----------	--	------	--------

ACU 1	2.5 HP Wall Mounted Inverter	KSG-IWF-25WY8K1M32			
	Estimated Pipe Length = 43 ft				
	Estimated Royal Cord Length = 48 ft				
	Initial Charge				P 5,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	33 ft	P 400.00/ft	P 13,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	38 ft	P 100.00/ft	P 3,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	P 350.00/pc	P 1,750.00
	Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
	PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
					P 20,350.00

Estimated Charges	P 25,850.00
-------------------	-------------

DINING		Area	45.5 sqm
--------	--	------	----------

ACU 2	6.0 HP Ceiling Cassette Inverter	KLM-IS60-AA1M32			
	Estimated Pipe Length = 37 ft				
	Estimated Royal Cord Length = 44 ft				
	Initial Charge				P 14,000.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 3/8 " x Ø 5/8"	27 ft	P 400.00/ft	P 10,800.00
	Royal Cord (comm. wire)	2.mm2 x 4C	34 ft	P 100.00/ft	P 3,400.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
	Circuit Breaker waterproof	40A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
	Rubber Insulation	1 1/8" x 3/8" x 6'	4 pc/s	P 150.00/pc	P 600.00
	Full thread	3/8" x 10'	4 pc/s	P 150.00/pc	P 600.00
	Metal Clamp	3"	8 pc/s	P 120.00/pc	P 960.00
	Indoor bracket	Fab. floor/ceiling	1 pc/s	P 1,500.00/pc	P 1,500.00
	Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
	PVC blue	1" x 10'	3 pc/s	P 200.00/pc	P 600.00
					P 26,350.00

Estimated Charges	P 40,350.00
-------------------	-------------

LIVING	Area	41.7 sqm
---------------	-------------	-----------------

ACU 3 4.0 HP Ceiling Cassette Inverter
 Estimated Pipe Length = 55 ft
 Estimated Royal Cord Length = 62 ft

KLM-IS40-AA1M32

Initial Charge

P 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	45 ft	P 400.00/ft	P 18,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	52 ft	P 100.00/ft	P 5,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	P 350.00/pc	P 2,450.00
Rubber Insulation	1 1/8" x 3/8" x 6'	8 pc/s	P 150.00/pc	P 1,200.00
Full thread	3/8" x 10'	4 pc/s	P 150.00/pc	P 600.00
Metal Clamp	3"	8 pc/s	P 120.00/pc	P 960.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	P 1,500.00/pc	P 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	5 pc/s	P 200.00/pc	P 1,000.00

P 37,400.00

Estimated Charges

P 48,400.00

DEN/FAMILY ROOM	Area	20 sqm
------------------------	-------------	---------------

ACU 4 2.5 HP Wall Mounted Inverter
 Estimated Pipe Length = 53 ft
 Estimated Royal Cord Length = 58 ft

KSG-IWF-25Wfy8K1M32

Initial Charge

P 5,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft	P 400.00/ft	P 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	P 100.00/ft	P 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	7 pc/s	P 120.00/pc	P 840.00

P 26,540.00

Estimated Charges

P 32,040.00

WALK IN CLOSET	Area	12 sqm
-----------------------	-------------	---------------

ACU 5 1.5 HP Wall Mounted Inverter
 Estimated Pipe Length = 27 ft
 Estimated Royal Cord Length = 32 ft

KSG-IWF-15Wfy8K1M32

Initial Charge

P 4,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	17 ft	P 350.00/ft	P 5,950.00
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	P 100.00/ft	P 2,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 350.00/pc	P 1,050.00
Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	3"	4 pc/s	P 120.00/pc	P 480.00

P 11,130.00

Estimated Charges

P 15,630.00

T&B 5	Area	21 sqm
------------------	------	--------

ACU 6 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**
 Estimated Pipe Length = 37 ft
 Estimated Royal Cord Length = 42 ft

Initial Charge P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	27 ft	P 350.00/ft	P 9,450.00
Royal Cord (comm. wire)	2.mm2 x 4C	32 ft	P 100.00/ft	P 3,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 350.00/pc	P 700.00
Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	3"	4 pc/s	P 120.00/pc	P 480.00
				P 15,280.00

Estimated Charges	P 19,780.00
--------------------------	--------------------

MASTER BEDROOM	Area	40 sqm
-----------------------	------	--------

ACU 7 4.0 HP Floor Standing Inverter **KLG-IF40-5G1M32**
 Estimated Pipe Length = 66 ft
 Estimated Royal Cord Length = 73 ft

Initial Charge P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	56 ft	P 400.00/ft	P 22,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	63 ft	P 100.00/ft	P 6,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	12 pc/s	P 120.00/pc	P 1,440.00
				P 40,080.00

Estimated Charges	P 51,080.00
--------------------------	--------------------

STUDY ROOM	Area	23 sqm
-------------------	------	--------

ACU 8 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**
 Estimated Pipe Length = 69 ft
 Estimated Royal Cord Length = 74 ft

Initial Charge P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	59 ft	P 400.00/ft	P 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	64 ft	P 100.00/ft	P 6,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
				P 36,100.00

Estimated Charges	P 41,600.00
--------------------------	--------------------

BEDROOM 3	Area	20 sqm
------------------	------	--------

ACU 9 2.5 HP Wall Mounted Inverter KSG-IWF-25WFY8K1M32
 Estimated Pipe Length = 40 ft
 Estimated Royal Cord Length = 45 ft

Initial Charge P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	6 pc/s	P 120.00/pc	P 720.00
				P 19,340.00

Estimated Charges		P 24,840.00
--------------------------	--	-------------

BEDROOM 2	Area	21 sqm
------------------	------	--------

ACU 10 2.5 HP Wall Mounted Inverter KSG-IWF-25WFY8K1M32

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft	P 400.00/ft	P 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	P 100.00/ft	P 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
				P 27,600.00

Estimated Charges		P 33,100.00
--------------------------	--	-------------

BEDROOM 4	Area	21 sqm
------------------	------	--------

ACU 11 2.5 HP Wall Mounted Inverter KSG-IWF-25WFY8K1M32

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 35 ft

Initial Charge P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	20 ft	P 400.00/ft	P 8,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	P 100.00/ft	P 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	P 350.00/pc	P 350.00
Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	3"	2 pc/s	P 120.00/pc	P 240.00
				P 12,540.00

Estimated Charges		P 18,040.00
--------------------------	--	-------------

Total Estimated Charges


P 350,710.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation with installer.
- 4 Coppertube expose inside the area.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:



Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

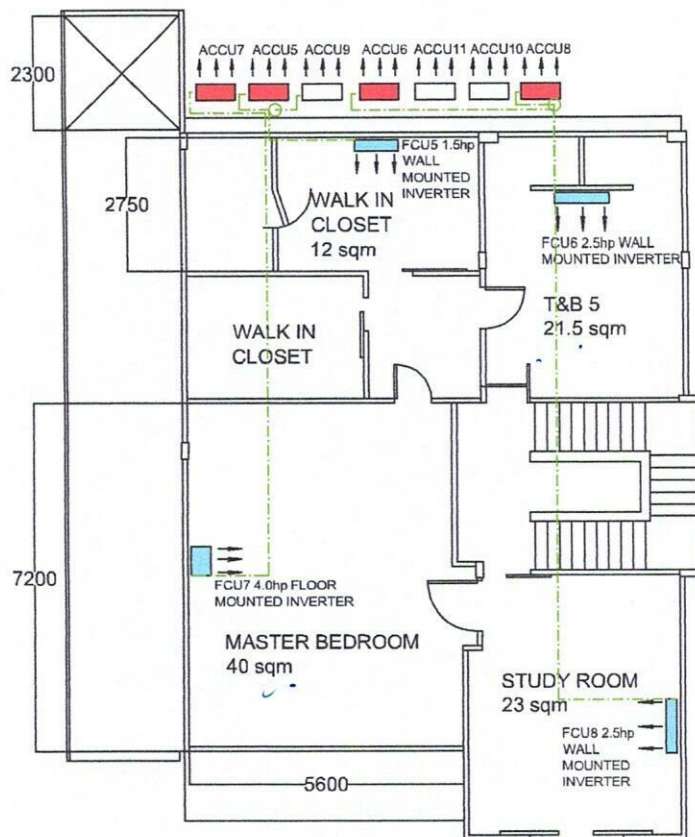


SECOND FLOOR

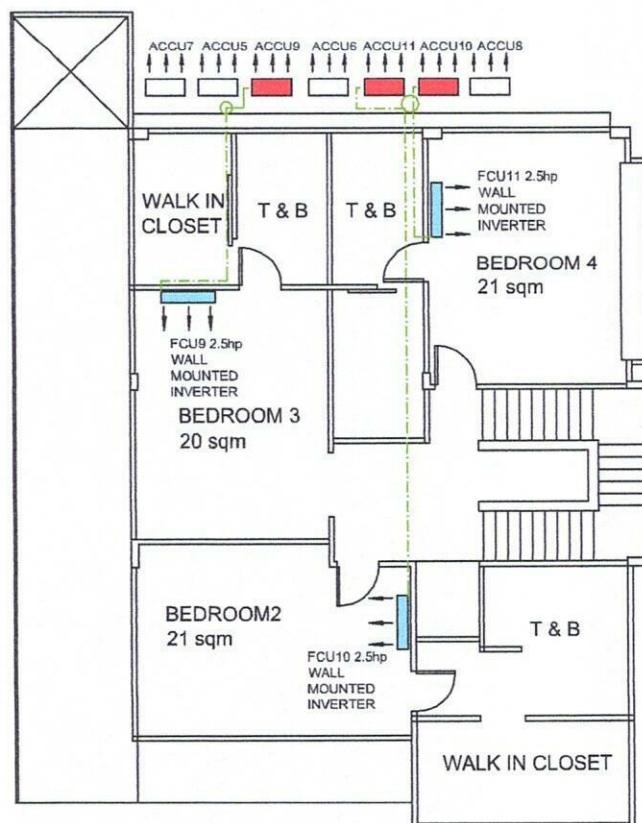

THIRD FLOOR

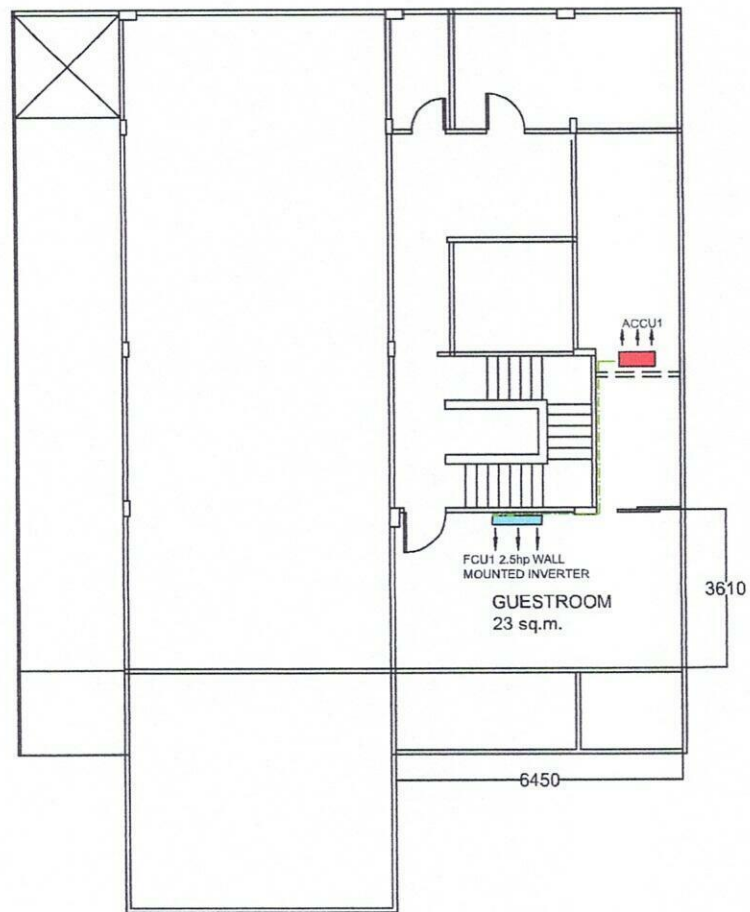

LOWER GROUND FLOOR

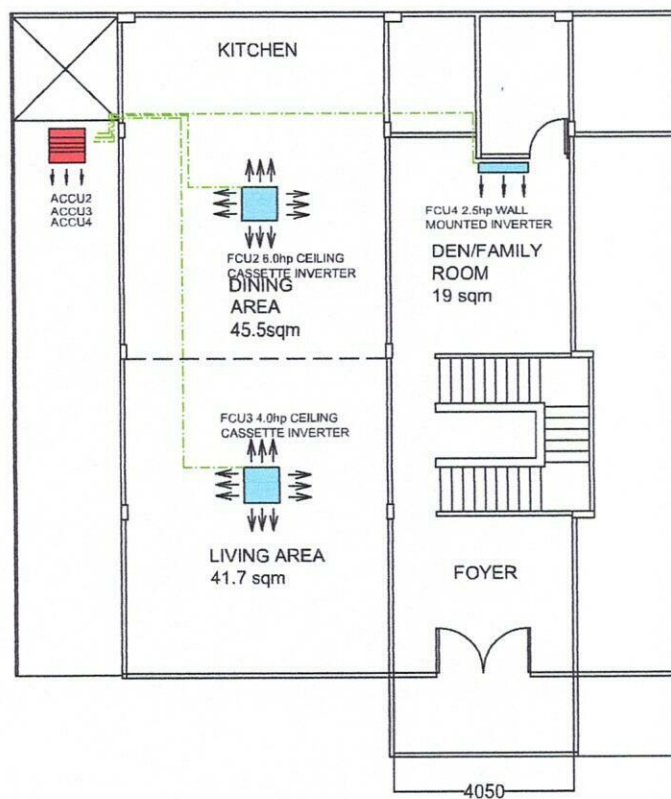

GROUND FLOOR