

kolin

air conditioner

August 16, 2024

ATTY. PETER SUCHIANGCO
119 AQUARIUS ST., CINCO HERMANOS, MARIKINA CITY
TEL #: 0966-624999 / 0922-814271
Email: rdmtech.88@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32	117,995.00	92,036.10	PHP	184,072.20
3	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	55,744.10	PHP	167,232.30
1	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	49,816.10
2	UNIT/S	MODEL: KSG-IWF-10WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	29,224.10	PHP	58,448.20
TOTAL UNIT COST					PHP	459,568.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	279,330.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	738,898.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING MOUNTED : ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

**** INSTALLATION C/O ASC**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-08-24-0736
REG-22%/4K

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

August 15, 2024
 ATTY . PETER SUCHIANGCO
 119 Aquarius St, Cinco Hermanos, Marikina City
 0966-624999/ 0922-814271
rdmtech.88@gmail.com

MODEL	Qty
KLM-IC40-AA1M32	2
KSG-IWF-30Wfy8K1M32	3
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-10Wfy8K1M32	2

rev5- OLD AND NEW UNITS

DINING ROOM	Area	27 sqm
-------------	------	--------

ACU 1 3.0 HP Wall Mounted Inverter **KSG-IWF-30Wfy8K1M32**
 Estimated Pipe Length = 50 ft
 Estimated Royal Cord Length = 55 ft
Initial Charge ₱ 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 23,700.00

Estimated Charges	₱ 29,200.00
--------------------------	--------------------

KITCHEN	Area	20 sqm
---------	------	--------

ACU 2 3.0 HP Wall Mounted Inverter **KSG-IWF-30Wfy8K1M32**
 Estimated Pipe Length = 50 ft
 Estimated Royal Cord Length = 55 ft
Initial Charge ₱ 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 23,850.00

Estimated Charges	₱ 29,350.00
--------------------------	--------------------

HALLWAY	Area	29 sqm
----------------	------	--------

ACU 3 3.0 HP Wall Mounted Inverter **KSM-IW29AE-5G1M (OLD UNIT)**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge P 4,000.00

Includes:

Labor

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	50 ft	P 350.00/ft	P 17,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	57 ft	P 100.00/ft	P 5,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	P 350.00/pc	P 2,100.00
Dismantle	2.5HP Wall Mounted	1 set	P 2,500.00/set	P 2,500.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Outdoor Bracket	Galvanise-large	1 pc/s	P 1,650.00/pc	P 1,650.00
				P 30,900.00

Estimated Charges		P 34,900.00
--------------------------	--	--------------------

MASTER BEDROOM	Area	24 sqm
-----------------------	------	--------

ACU 4 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 350.00/ft	P 10,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
				P 16,850.00

Estimated Charges		P 22,350.00
--------------------------	--	--------------------

FAMILY ROOM	Area	25 sqm
--------------------	------	--------

ACU 5 3.0 HP Wall Mounted Inverter **KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge P 5,500.00

Includes:

Labor

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 350.00/ft	P 10,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	37 ft	P 100.00/ft	P 3,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 350.00/pc	P 1,050.00
Outdoor Bracket	Galvanise-large	1 pc/s	P 1,650.00/pc	P 1,650.00
				P 18,500.00

Estimated Charges		P 24,000.00
--------------------------	--	--------------------

WALK IN CLOSET	Area	10 sqm
-----------------------	------	--------

ACU 6 1.0 HP Wall Mounted Inverter **KSG-IWF-10WFY8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge P 4,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	30 ft	P 350.00/ft	P 10,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
				P 17,000.00

Estimated Charges		P 21,500.00
--------------------------	--	-------------

T & B	Area	10 sqm
------------------	------	--------

ACU 7 1.0 HP Wall Mounted Inverter **KSG-IWF-10WFY8K1M32**

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge P 4,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	27 ft	P 350.00/ft	P 9,450.00
Royal Cord (comm. wire)	2.mm2 x 4C	32 ft	P 100.00/ft	P 3,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 350.00/pc	P 1,050.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
				P 15,300.00

Estimated Charges		P 19,800.00
--------------------------	--	-------------

HALLWAY 2ND FLOOR	Area	23 sqm
--------------------------	------	--------

ACU 8 3.0 HP Wall Mounted Inverter **KSM-IW30-4F1M (OLD UNIT)**

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 28 ft

Initial Charge P 5,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	P 100.00/ft	P 3,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 350.00/pc	P 700.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
				P 13,200.00

Estimated Charges		P 18,700.00
--------------------------	--	-------------

BEDROOM 1	Area	20 sqm
------------------	------	--------

ACU 9 2.0 HP Wall Mounted Inverter **KSM-IW20-4F1M (OLD UNIT)**

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length = 25 ft

Initial Charge P 4,000.00

Includes:

Labor

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	20 ft	P 350.00/ft	P 7,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	27 ft	P 100.00/ft	P 2,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Outdoor Bracket	Galvanise-large	1 pc/s	P 1,650.00/pc	P 1,650.00
Dismantle(OUTDOOR ONLY)	2.0HP Wall Mounted	1 set	P 1,250.00/set	P 1,250.00
				P 14,050.00

Estimated Charges		P 18,050.00
--------------------------	--	--------------------

ENTERTAINMENT ROOM	Area	63 sqm
---------------------------	------	--------

ACU 10 4.0 HP Ceiling Suspended Inverter **KLM-IC40-AA1M32**

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length = 34 ft

Initial Charge P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	17 ft	P 400.00/ft	P 6,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	P 100.00/ft	P 2,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/1PH	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	P 350.00/pc	P 350.00
Indoor bracket	Fabricated floor	1 pc/s	P 1,500.00/pc	P 1,500.00
Outdoor bracket	Fab. wall w/ledge	1 pc/s	P 6,500.00/pc	P 6,500.00
Dismantle	4.0HP Floor Standing	1 set	P 3,000.00/set	P 3,000.00
PVC blue	3/4" x 10'	3 pc/s	P 150.00/pc	P 450.00
				P 22,490.00

Estimated Charges		P 34,490.00
--------------------------	--	--------------------

ACU 11 4.0 HP Ceiling Suspended Inverter **KLM-IC40-AA1M32**

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 37 ft

Initial Charge P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	20 ft	P 350.00/ft	P 7,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	27 ft	P 100.00/ft	P 2,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/1PH	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	P 350.00/pc	P 350.00
Outdoor bracket	Modified	1 pc/s	P 1,500.00/pc	P 1,500.00
scaffoldings	4sets	1 mtr	P 1,500.00/mtr	P 1,500.00
PVC blue	3/4" x 10'	3 pc/s	P 150.00/pc	P 450.00
				P 14,990.00

Estimated Charges		P 26,990.00
--------------------------	--	--------------------

Total Estimated Charges

P 279,330.00

NOTES: DISMANTLE UNITS PRICE FOR EXISTING

1. ACU3 - 1ST FLOOR HALLWAY- 2.6HP , WALL MOUNTED - 2,500 Plus PULL-OUT 500= 3,000
2. ACU9 - 2ND FLOOR HALLWAY- 3.0HP , WALL MOUNTED - 2,500 Plus PULL-OUT 500= 3,000

Additional existing units already dismantle:for check up and install if still seviceable.

1. KSM-IW20-4F1M (ACU9)
2. KSM-IW30-4F1M (ACU8)
3. KSM-IW29AE-5G1M (ACU3)


Bring to shop to determined if still serviceable, SHOP will provide the check up and repair QUOTATION

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.Not yet final. For confirmation of location.indoor and outdoor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit with installer before installation.
- 4 Coppertube expose in the area. Customer will cover the coppertube after installation.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:



Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

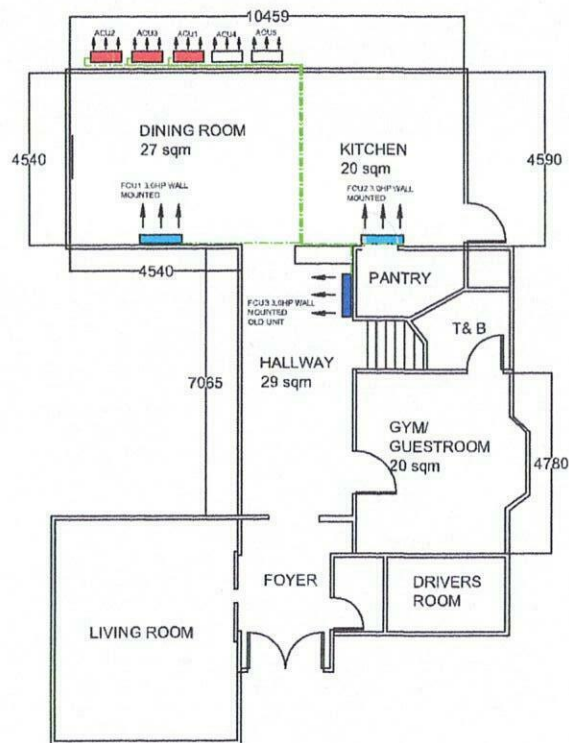

GROUND FLOOR

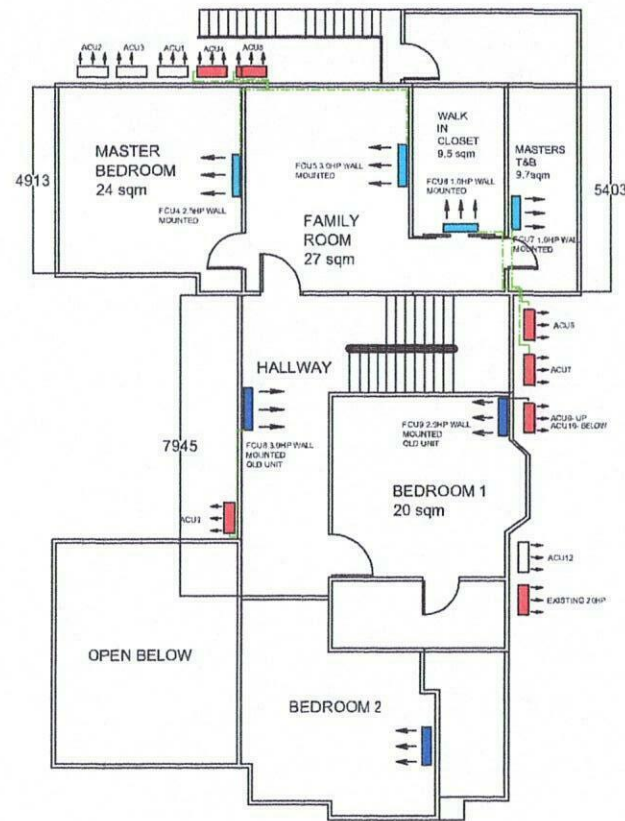

SECOND FLOOR

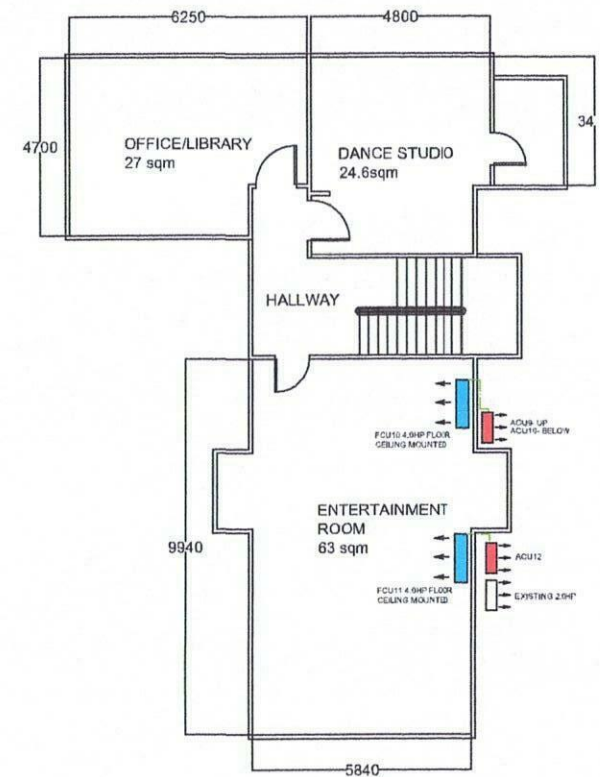

ATTIC FLOOR