

kolin

air conditioner

August 29, 2024

MR. ALLAN DIMAPILIS
B2 L9B DOMINIQUE ST., ST. JOSEPH SUBD., BRGY. PULANG LUPA DOS, LAS PIÑAS CITY
TEL#: 0951-0680967

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

**OPTION 1

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW10-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) REGULAR INVERTER R-32	29,995.00	19,396.10 /	PHP	19,396.10
TOTAL UNIT COST					PHP	19,396.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	7,500.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	27,496.10

**OPTION 2

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-10WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	29,224.10 /	PHP	29,224.10
TOTAL UNIT COST					PHP	29,224.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	4,500.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	34,324.10

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

** INSTALLATION C/O ASC

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

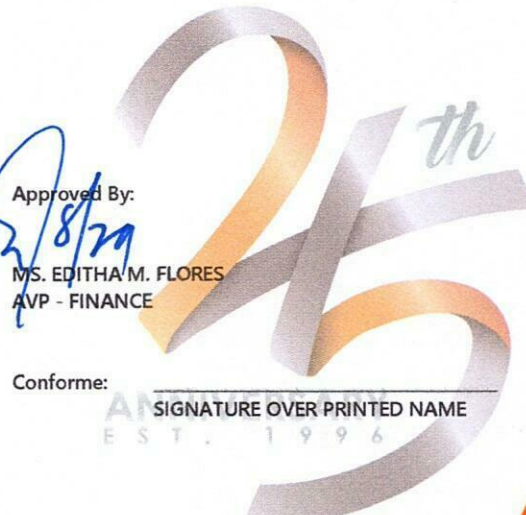

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-08-24-0747
EMF-22%/4K

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:


SIGNATURE OVER PRINTED NAME
EST. 1996

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.



N.V.F.S MAINTENANCE AIRCON & REFRIGERATION SYSTEM TRADING
MANILA: Office Unit Q Monserrat St B.F. Homes Phase 1 Sucat Rd Paranaque
+639171163534 | +639455920222 | +632 85146379
E-mail: sales@about-nvfs-ph.com | inquiry@about-nvfs-ph.com
www.nvfs-ph.com
TIN Number: 305-342-355-00000

QUOTATION

TO : Allan Dimapilis

ADDRESS: B2 L9B Dominique St., St. Joseph Subd., Brgy. Pulang Lupa Dos, LAS PIÑAS CITY, Metro Manila

REFERENCE NO:

DATE : August 29, 2024

CUSTOMER NO :

Repair Code	BRAND AND ITEM DESCRIPTION	QTY	UNIT	UNIT PRICE	GROSS AMOUNT	DISCOUNT	NET PRICE
*	Masters Bedroom						
*	1HP Wall Mounted - KOLIN - KSM-IW10-WCT10M1M32 - Basic Inverter	1	Set		P0.00		P0.00
*	1HP Wall Mounted - KOLIN - KSG-IWF-10WY8K1M32 - Full DC Inverter	1	Set		P0.00		P0.00
11.1	Installation 1.0 - 2.0 hp - (Inclusive of 10FT Copper Tube , 4C Communication Wire , Ordinary Bracket, Drain Hose)	1	Set	P7,500.00	P7,500.00		P7,500.00

Mode of Payments

	Cash, Gcash, maya
	Bank Transfer or Check Payment under: NVFS Maintenance Aircon & Refrigeration System Trading
	BDO Account 004128020472 President's Avenue BF Paranaque Branch
	Metrobank Account 034-7-03452574-5 BF Homes Aguirre Branch

SCOPE OF WORKS:

1. Supply , Delivery and First 10ft. Copper Tube / Communication Wirlings and 10ft. drain pipe
2. Rubber installation tubes for ceiling 3/4 size for outdoor exposure walls, electrical materials including Royal Cord 2.0mm2 x 4C Communication wire ,PVC drain line including fittings
4. Provide Installation materials such as, copper pipes, soft drawn seamless copper pipe.
5. Brazing of copper tubing & covering of polyethylene tape.
6. Supply of installation tools, welding equipment, manpower and supervision.
7. System dehydration and vacuuming. Testing commissioning and turnover.
8. Insulated Drain Line 3/4 Size inclusive of Elbows and T extensions

TERMS & CONDITIONS

1. Unit Price and Installation are VAT Inclusive.
2. Full Payment within 15 days after commissioning and submission of billing statement with service report completion.
2. Price are subject to change after sales offer validity which seven (7) days from the date of issue.

WARRANTY

Note : for KOLIN Models :

- * for Residential ACU : with 10 years warranty on compressor and 3 years warranty on PCB 1 year on evaporator coil and condenser coil
 - * for Light Commercial ACU : with 5 years warranty on compressor and 1 year warranty on PCB / evaporator coil and condenser coil
2. Warranty may be restricted or disallowed based on the discretion of N.V.F.S.

EXCLUSIONS:

1. Excess copper tube & Communication Wiring 4C with separate charges: P450/ft. for Split Type 1.0hp-2.0hp; P500/ft. for Split Type 2.5hp-3.0hp for Floor Mounted and Ceiling Mounted
2. Electrical cabling for air condition power supply / Electrical Supply from Main Panel to ACCU breaker / Dismantling of existing unit / Restoration Works
3. Provision and installation of NEMA 3R Circuit breaker 20 AMP / 30 AMP P1000
4. Electrical cabling for air condition power supply / Indoor to Outdoor Service breaker Size # 14 THHN Wire P60/Mtr, Size # 12 THHN Wire P80/Mtr, Size # 10 THHN Wire P90/Mtr

Ryan L. Guerra

NVFS Maintenance Aircon and Refrigeration System Trading

Date :

Conforme:

Client's Signature over Printed Name / Date

AUTHORIZED DEALER OF THE FOLLOWING BRANDS



AUTHORIZED SERVICE CENTER OF THE FOLLOWING BRANDS

