

kolin

air conditioner

August 7, 2024

MR. JACKSON ANG
19 RAGANG ST., BRGY. MANRESA, QUEZON CITY
TEL#: 0917-8222630

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
7	UNIT/S	MODEL: KSG-IWF-30WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	55,744.10 1	PHP	390,208.70
1	UNIT/S	MODEL: KSG-IWF-25WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10 1	PHP	49,816.10
1	UNIT/S	MODEL: KSG-IWF-20WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	42,484.10 1	PHP	42,484.10
1	UNIT/S	MODEL: KSG-IWF-15WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	32,344.10 1	PHP	32,344.10
1	UNIT/S	MODEL: KSG-IWF-10WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	29,224.10 1	PHP	29,224.10
3	UNIT/S	MODEL: KAG-250WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 24,120 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x31.5"x17"	48,695.00	36,182.10 1	PHP	108,546.30
1	UNIT/S	MODEL: KAG-100WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 10,200 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 18"x25"x14"	28,995.00	21,316.10 1	PHP	21,316.10
TOTAL UNIT COST					PHP	673,939.50
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	379,745.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,054,284.50

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


INSTALLATION C/O AUTHORIZED SERVICE CENTER.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITH M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-08-24-0702
ECY-22%/4K/1.8K/1.3K

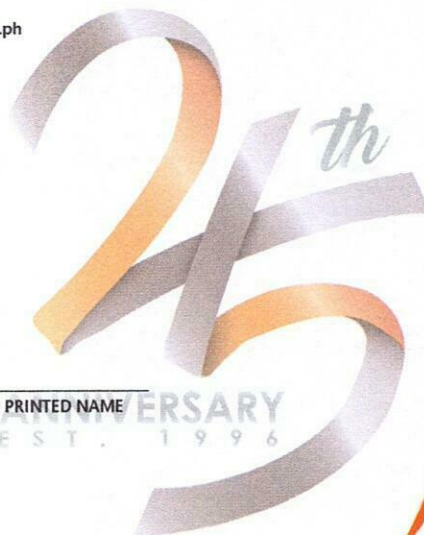
Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792



Bringing comfort to your home.

AUGUST 05, 2024
 JACKSON ANG
 19 Ragang, St. Brgy Manresa, Quezon City
 0917-8222630

MODEL	Qty
KSG-IWF-30Wfy8K1M32	7
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	1
KSG-IWF-15Wfy8K1M32	1
KSG-IWF-10Wfy8K1M32	1
KAG-250WCINV	3
KAG-100WCINV	1

rev3

OFFICE		Area	11 sqm
--------	--	------	--------

ACU 1	1.0 HP Window type Inverter	KAG-100WCINV			
	Initial Charge				₱ 1,200.00
	Includes:				
	Labor				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00

Estimated Charges	₱ 1,375.00
-------------------	------------

GUESTROOM		Area	10.8 sqm
-----------	--	------	----------

ACU 2	1.0 HP Wall Mounted Inverter	KSG-IWF-10Wfy8K1M32			
	Estimated Pipe Length = 33 ft				
	Estimated Royal Cord Length = 38 ft				
	Initial Charge				₱ 4,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket(wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	23 ft	₱ 350.00/ft	₱ 8,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	₱ 100.00/ft	₱ 2,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
	Metal Clamp	3"	6 pc/s	₱ 120.00/pc	₱ 720.00
	Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Drain Hose	White -1/2"	4 ft	₱ 25.00/ft	₱ 100.00
					₱ 14,670.00

Estimated Charges	₱ 19,170.00
-------------------	-------------

JACKSON DEN/ OFFICE		Area	52.7 sqm
---------------------	--	------	----------

ACU 3	2.5 HP Window type Inverter	KAG-250WCINV			
	Initial Charge				₱ 1,200.00
	Includes:				
	Labor				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00

Estimated Charges	₱ 1,375.00
-------------------	------------

ACU 4	2.5 HP Wall Mounted Inverter	KSG-IWF-25Wfy8K1M32			
	Estimated Pipe Length = 50 ft				
	Estimated Royal Cord Length = 55 ft				
	Initial Charge				₱ 5,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket(wall)				

Consumables					
Installation Materials					
Copper Tube	Ø 1/4" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00	
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	₱ 350.00/pc	₱ 2,450.00	
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00	
Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00	₱ 25,875.00
Estimated Charges					₱ 31,375.00

WORKING AREA	Area	29 sqm
---------------------	------	--------

ACU 5	3.0 HP Wall Mounted Inverter	KSG-IWF-30WFY8K1M32			
Estimated Pipe Length = 46 ft					
Estimated Royal Cord Length = 51 ft					
Initial Charge					₱ 5,500.00
Includes:					
Labor					
10ft Copper Tube					
10ft Royal Cord					
Outdoor Bracket(wall)					
Consumables					
Installation Materials					
Copper Tube	Ø 1/4" x Ø 5/8"	36 ft	₱ 400.00/ft	₱ 14,400.00	
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00	
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00	
Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00	₱ 23,415.00
Estimated Charges					₱ 28,915.00

MASTER BEDROOM	Area	27 sqm
-----------------------	------	--------

ACU 6	2.5 HP Window type Inverter	KAG-250WCINV			
Initial Charge					
Includes:					
Labor					
Consumables					
Installation Materials					
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00	₱ 175.00
Estimated Charges					₱ 1,375.00

BEDROOM 3	Area 17.3 sqm
------------------	----------------------

ACU 7 1.5 HP Wall Mounted Inverter **KSG-IWF-15Wfy8K1M32**
 Estimated Pipe Length = 46 ft
 Estimated Royal Cord Length = 51 ft
Initial Charge **₱ 4,500.00**

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket(wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	₱ 350.00/ft	₱ 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 21,615.00

Estimated Charges	₱ 26,115.00
--------------------------	--------------------

BEDROOM 2	Area 22 sqm
------------------	--------------------

ACU 8 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**
 Estimated Pipe Length = 60 ft
 Estimated Royal Cord Length = 65 ft
Initial Charge **₱ 4,500.00**

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket(wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	50 ft	₱ 350.00/ft	₱ 17,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	55 ft	₱ 100.00/ft	₱ 5,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Drain Hose	White -1/2"	5 ft	₱ 50.00/ft	₱ 250.00
				₱ 29,090.00

Estimated Charges	₱ 33,590.00
--------------------------	--------------------

DINING	Area 30 sqm
---------------	--------------------

ACU 9 3.0 HP Wall Mounted Inverter **KSG-IWF-30Wfy8K1M32**
 Estimated Pipe Length = 69 ft
 Estimated Royal Cord Length = 74 ft
Initial Charge **₱ 5,500.00**

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket(wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	59 ft	₱ 400.00/ft	₱ 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	64 ft	₱ 100.00/ft	₱ 6,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Circuit Breaker waterproof	30A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 36,665.00

Estimated Charges	₱ 42,165.00
--------------------------	--------------------

MEZZANINE	Area	26 sqm
------------------	------	--------

ACU 10 2.5 HP Window type Inverter		KAG-250WCINV			
Initial Charge					₱ 1,200.00
Includes:					
Labor					
Consumables					
Installation Materials	Description	Qty	Price per qty	Subtotal	
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00	₱ 175.00
Estimated Charges					₱ 1,375.00

COVERED COURT	Area	137 sqm
----------------------	------	---------

ACU 11 3.0 HP Wall Mounted Inverter

KSG-IWF-30Wfy8K1M32

Estimated Pipe Length = 89 ft

Estimated Royal Cord Length = 94 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube Ø 1/4" x Ø 5/8"	79 ft	P 400.00/ft	P 31,600.00
Royal Cord (comm. wire) 2.2mm2 x 4C	84 ft	P 100.00/ft	P 8,400.00
Royal Cord (ACCU-Breaker) 3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Rubber Insulation 2 1/8" x 3/4" x 6'	12 pc/s	P 350.00/pc	P 4,200.00
Full thread 3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp 3"	16 pc/s	P 120.00/pc	P 1,920.00
Circuit Breaker waterproof 30A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Drain Hose White -1/2"	5 ft	P 25.00/ft	P 125.00

P 47,845.00

Estimated Charges

P 53,345.00

ACU 12 3.0 HP Wall Mounted inverter

KSG-IWF-30Wfy8K1M32

Estimated Pipe Length = 76 ft

Estimated Royal Cord Length = 81 ft

Initial Charge

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(wall)

Consumables

Installation Materials

Subtotal

Copper Tube

Ø 1/4" x Ø 5/8"

66 ft

P 400.00/ft

P 26,400.00

Royal Cord (comm. wire)

2.mm2 x 4C

71 ft

P 100.00/ft

P 7,100.00

Royal Cord (ACCU-Breaker)

3.5mm x 3c

5 ft

P 60.00/ft

P 300.00

Rubber Insulation

2 1/8" x 3/4" x 6'

9 pc/s

P 350.00/pc

P 3,150.00

Full thread

3/8" x 10'

2 pc/s

P 150.00/pc

P 300.00

Metal Clamp

3"

12 pc/s

P 120.00/pc

P 1,440.00

Circuit Breaker waterproof

30A/1ph

1 pc/s

P 1,000.00/pc

P 1,000.00

Drain Hose

White -1/2"

5 ft

P 25.00/ft

P 125.00

P 39,815.00

Estimated Charges

P 45,315.00

ACU 13 3.0 HP Wall Mounted Inverter**KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 70 ft

Estimated Royal Cord Length = 75 ft

Initial Charge**P 5,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	60 ft P 400.00/ft	P 24,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	65 ft P 100.00/ft	P 6,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s P 150.00/pc	P 300.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Circuit Breaker waterproof	30A/1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Drain Hose	White -1/2"	5 ft P 25.00/ft	P 125.00
			P 35,285.00

Estimated Charges**P 40,785.00****ACU 14 3.0 HP Wall Mounted Inverter****KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge**P 5,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft P 400.00/ft	P 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft P 100.00/ft	P 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s P 350.00/pc	P 700.00
Full thread	3/8" x 10'	1 pc/s P 150.00/pc	P 150.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Circuit Breaker waterproof	30A/1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Drain Hose	White -1/2"	5 ft P 25.00/ft	P 125.00
			P 25,235.00

Estimated Charges**P 30,735.00****ACU 15 3.0 HP Wall Mounted Inverter****KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge**P 5,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	27 ft P 400.00/ft	P 10,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	32 ft P 100.00/ft	P 3,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s P 350.00/pc	P 700.00
Full thread	3/8" x 10'	1 pc/s P 150.00/pc	P 150.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Circuit Breaker waterproof	30A/1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Drain Hose	White -1/2"	5 ft P 25.00/ft	P 125.00
			P 17,235.00

Estimated Charges**P 22,735.00**

Total Estimated Charges

P 379,745.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 **Indoor should have 10cm from the ceiling to top of indoor unit.**
- 3 for site visit with installer and markings for drainline and copper tube lay out.
- 4 Customer needs to provide catwalk for servicing, should have 1.3 meter or more.
- 5 **Need waiver due undercapacity open area, LIVING and DINING.ACU9**
- 6 Working Days: Monday to Saturday: 8am to 5pm.
- 7 KAG- 250WCINV Unit Dimension: (W x D x H) 660 x 800 x 428mm, or 26 x 31.5 x 17 inch
- 8 KAG- 100WCINV Unit Dimension: (W x D x H) 450 x 640 x 350mm, or 18 x 25 x 14 inch
- 9 Mechanical Plans, Permits, Electrical permits not included.
- 10 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 11 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 12 **Final charges will be based on actual installation.**


Prepared by:

Customer Conformer:

Jeffrey Dadios
Field Surveyor

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

August 6, 2024
JACKSON ANG
19 Ragang, St. Brgy Manresa, Quezon City
0917-8222630

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
LIVING/DINING	65 sqm	KSG-IWF-30WFY-8K1M32 2UNITS	KSG-IWF-30WFY-8K1M32	Calculated 5.3hp under by 2.3hp

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor - VOID).**

For your guidance and information

Prepared by:

Jeoffrey Dadios
Surveyor

Approved by:

Mr. Alvin de Rivera
Service Manager

Aug 6, 2024

Noted by:

Engr. Kenneth Zamora
Service Supervisor - Field
and Shop Operation

Customer Conforme:

Signature Over Printed Name

