

kolin

air conditioner

July 16, 2024

MS. RUTH TIANGCO
B3 L10 LATOR ST. MCKINLEY WEST VILLAGE, FORT BONIFACIO, TAGUIG CITY
TEL#: 0905-3387308
Email: ruthationgco@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLM-IS60-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 55,503 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	154,995.00	120,896.10	PHP	120,896.10
1	UNIT/S	MODEL: KLM-IS40-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 37,980 Kj/h (3.0TR) INVERTER R-32	119,995.00	93,596.10	PHP	93,596.10
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10	PHP	81,292.10
6	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	298,896.60
1	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	42,484.10	PHP	42,484.10
1	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	32,344.10	PHP	32,344.10
TOTAL UNIT COST					PHP	669,509.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	350,710.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,020,819.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

INSTALLATION C/O AUTHORIZED SERVICE CENTER.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLE S. LIM
KMI ASSISTANT

Noted by:


MARTIN R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-07-24-0641
ECY-22%/7K/4K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

July 15, 2024

RUTH TIANGCO

B3 L10 Lator St. McKinley West Village, Fort Bonifacio, Taguig City

0905-3387308

ruthationgco@gmail.com

MODEL	Qty
KLM-IS60-AA1M32	1
KLM-IS40-AA1M32	1
KLG-IF40-5G1M32	1
KSG-IWF-25WY8K1M32	6
KSG-IWF-20WY8K1M32	1
KSG-IWF-15WY8K1M32	1

GUESTROOM		Area	23 sqm
-----------	--	------	--------

ACU 1 2.5 HP Wall Mounted Inverter *KSG-IWF-25WY8K1M32*
 Estimated Pipe Length = 43 ft
 Estimated Royal Cord Length = 48 ft
 Initial Charge ₱ 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	38 ft	₱ 100.00/ft	₱ 3,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 20,350.00

Estimated Charges	₱ 25,850.00
-------------------	-------------

DINING		Area	45.5 sqm
--------	--	------	----------

ACU 2 6.0 HP Ceiling Cassette Inverter *KLM-IS60-AA1M32*
 Estimated Pipe Length = 37 ft
 Estimated Royal Cord Length = 44 ft
 Initial Charge ₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	27 ft	₱ 400.00/ft	₱ 10,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	34 ft	₱ 100.00/ft	₱ 3,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A/ 1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Rubber Insulation	1 1/8" x 3/8" x 6'	4 pc/s	₱ 150.00/pc	₱ 600.00
Full thread	3/8" x 10'	4 pc/s	₱ 150.00/pc	₱ 600.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
				₱ 26,350.00

Estimated Charges	₱ 40,350.00
-------------------	-------------

Estimated Charges	P 15,630.00
-------------------	-------------

T&B 5		Area	21 sqm
------------------	--	------	--------

ACU 6	2.0 HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32		
	Estimated Pipe Length = 37 ft			
	Estimated Royal Cord Length = 42 ft			
	Initial Charge			P 4,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Copper Tube	Ø 1/4" x Ø 1/2"	27 ft	P 350.00/ft
	Royal Cord (comm. wire)	2.mm2 x 4C	32 ft	P 100.00/ft
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc
	Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 350.00/pc
	Full thread	3/8" x 10'	1 pc/s	P 150.00/pc
	Metal Clamp	3"	4 pc/s	P 120.00/pc
				P 15,280.00
	Estimated Charges			P 19,780.00

MASTER BEDROOM		Area	40 sqm
-----------------------	--	------	--------

ACU 7	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32		
	Estimated Pipe Length = 66 ft			
	Estimated Royal Cord Length = 73 ft			
	Initial Charge			P 11,000.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Indoor Bracket (floor)			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Copper Tube	Ø 3/8" x Ø 5/8"	56 ft	P 400.00/ft
	Royal Cord (comm. wire)	2.mm2 x 4C	63 ft	P 100.00/ft
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft
	Circuit Breaker waterproof	40A/ 1ph	1 pc/s	P 1,000.00/pc
	Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc
	Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc
	Full thread	3/8" x 10'	2 pc/s	P 150.00/pc
	Metal Clamp	3"	12 pc/s	P 120.00/pc
				P 40,080.00
	Estimated Charges			P 51,080.00

STUDY ROOM		Area	23 sqm
-------------------	--	------	--------

ACU 8	2.5 HP Wall Mounted Inverter	KSG-IWF-25WFY8K1M32		
	Estimated Pipe Length = 69 ft			
	Estimated Royal Cord Length = 74 ft			
	Initial Charge			P 5,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Copper Tube	Ø 1/4" x Ø 5/8"	59 ft	P 400.00/ft
	Royal Cord (comm. wire)	2.mm2 x 4C	64 ft	P 100.00/ft
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc
	Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc
	Full thread	3/8" x 10'	2 pc/s	P 150.00/pc
	Metal Clamp	3"	10 pc/s	P 120.00/pc
	PVC blue	3/4" x 10'	1 pc/s	P 150.00
				P 36,100.00
	Estimated Charges			P 41,600.00

BEDROOM 3	Area	20 sqm
------------------	------	--------

ACU 9 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**
 Estimated Pipe Length = 40 ft
 Estimated Royal Cord Length = 45 ft
Initial Charge P 5,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	P 350.00/pc	P 1,400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	6 pc/s	P 120.00/pc	P 720.00
				P 19,340.00

Estimated Charges		P 24,840.00
--------------------------	--	-------------

BEDROOM 2	Area	21 sqm
------------------	------	--------

ACU 10 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**
 Estimated Pipe Length = 53 ft
 Estimated Royal Cord Length = 58 ft
Initial Charge P 5,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft	P 400.00/ft	P 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	P 100.00/ft	P 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
				P 27,600.00

Estimated Charges		P 33,100.00
--------------------------	--	-------------

BEDROOM 4	Area	21 sqm
------------------	------	--------

ACU 11 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**
 Estimated Pipe Length = 30 ft
 Estimated Royal Cord Length = 35 ft
Initial Charge P 5,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	20 ft	P 400.00/ft	P 8,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	P 100.00/ft	P 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	P 350.00/pc	P 350.00
Full thread	3/8" x 10'	1 pc/s	P 150.00/pc	P 150.00
Metal Clamp	3"	2 pc/s	P 120.00/pc	P 240.00
				P 12,540.00

Estimated Charges		P 18,040.00
--------------------------	--	-------------

Total Estimated Charges


P 350,710.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation with installer.
- 4 Coppertube expose inside the area.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformer:


Signature Over Printed Name

Reviewed by:



Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

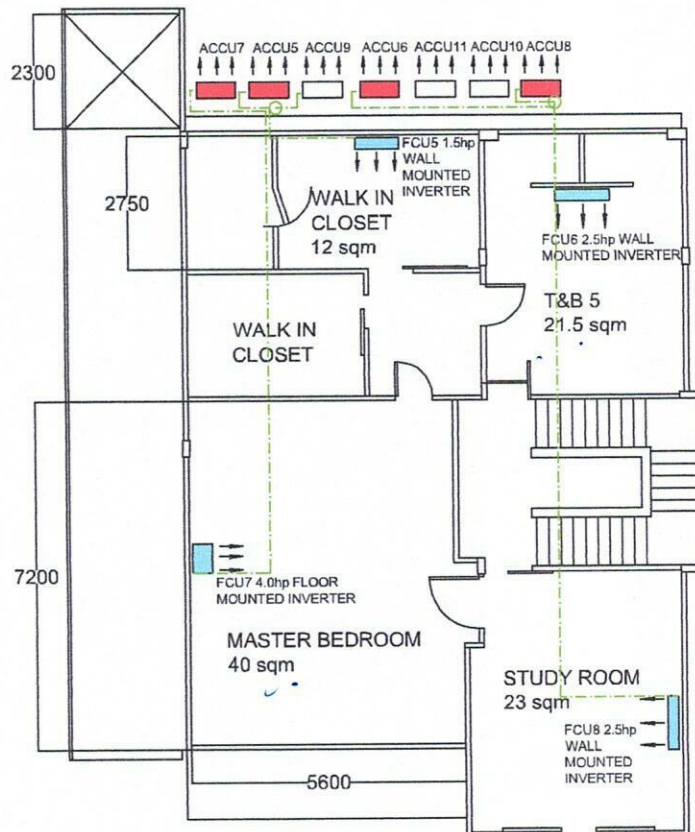


SECOND FLOOR

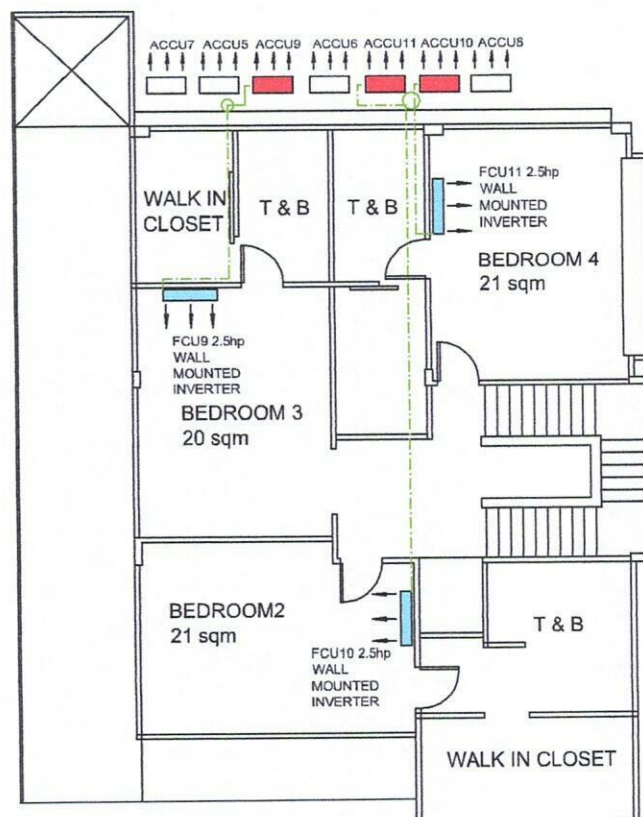

THIRD FLOOR

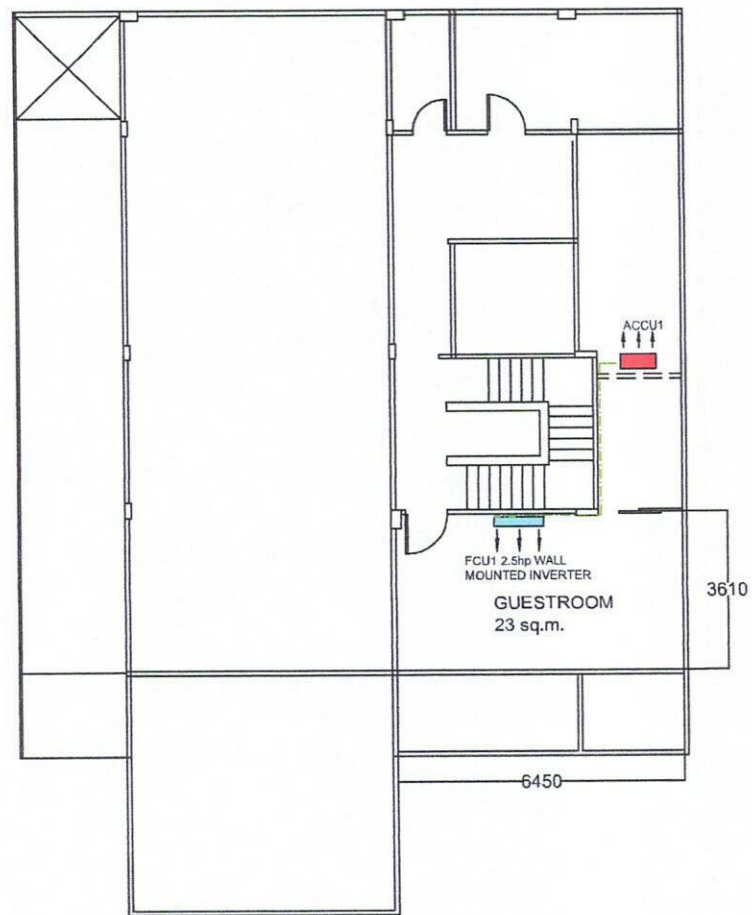

LOWER GROUND FLOOR

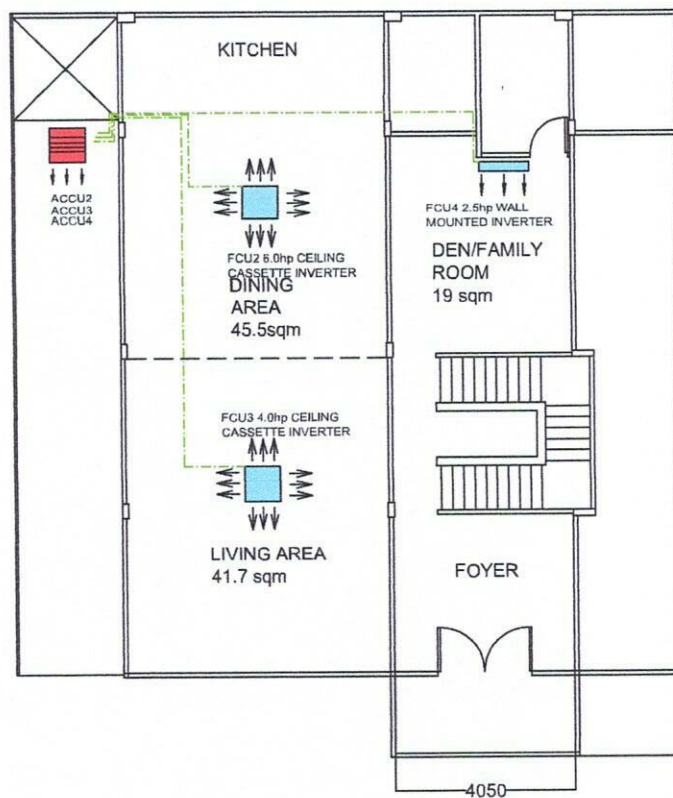

GROUND FLOOR