

kolin

air conditioner

July 3, 2024

MS. AUDREY SHIH
14 NEVADA ST., NORTHEAST GREENHILLS, SAN JUAN CITY
TEL#: 0917-5278861
Email: audreyshih@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	34,996.10	PHP	34,996.10
TOTAL UNIT COST					PHP	34,996.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	22,515.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	58,111.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

**** INSTALLATION C/O ASC**


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLE S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-07-24-0597
REG-22%/4K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

KOLIN Philippines International Inc.
Survey Form

No. 003488

Customer Name: ANDREW SHIH Date: 7-2-24
Address: 14 PEYAX ST. NORTH HAVEN, GREEK HILLS, SAN JUAN CITY SJR No. 211356
Establishment Type: Residential ☒ Area Surveyed: LIBRARY, DESK
Commercial ☐ Area Surveyed: _____
Recommended Product Model: KSM-1WKS-WCT10M1M32

Cooling Capacity Computation

Floor Area: 30 sqm
Ceiling Height: 2.6 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area:	<u>30</u>	x	550 Btu/h	<u>16500</u>	Btu/h
Ceiling Height (excess of 3 mtrs.):		x	20%		Btu/h
Window Direct Sunlight		x	20% - 50%		Btu/h
Total Cooling Capacity				<u>16500</u>	Btu/h

Add : Additional Heat Load

No. of Person	<u>3</u>	x	300 Btu/h	<u>900</u>	Btu/h
No. of Ordinary Light (<40w)	<u>8</u>	x	200 Btu/h	<u>1600</u>	Btu/h
No. of Special Light (>40w)		x	400 Btu/h		Btu/h
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h		Btu/h
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h		Btu/h
No. of Cooking Range		x	1500 Btu/h		Btu/h
No. of Laptop Computer		x	150 Btu/h		Btu/h
No. of Desktop Computer		x	400 Btu/h		Btu/h
No. of Printer		x	500 Btu/h		Btu/h
No. of Photocopier		x	1000 Btu/h		Btu/h
Total Cooling Capacity				<u>1500</u>	Btu/h

Recommended Cooling Capacity

19000 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

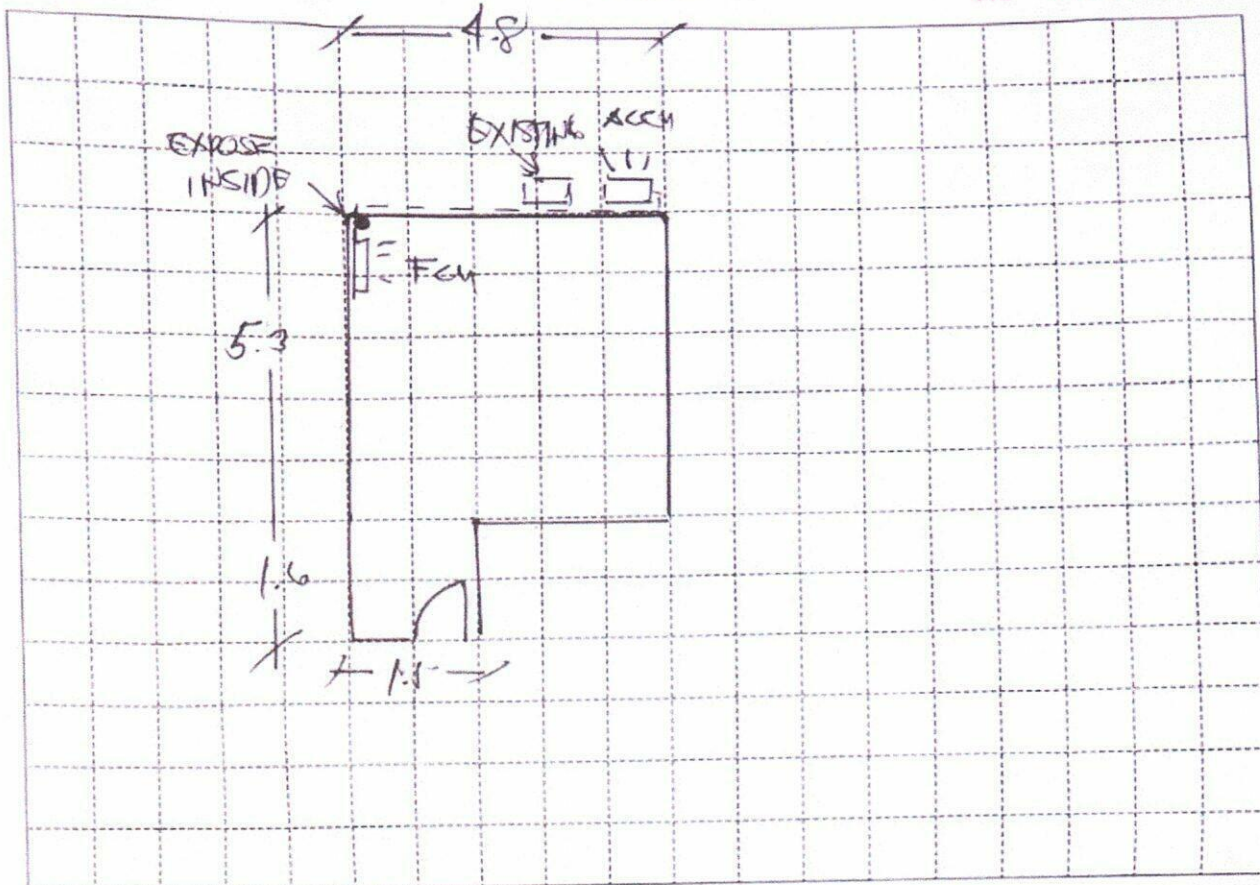
Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☒ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension : _____

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern:

CUSTOMER NEED TO TRANSFER POWER SUPPLY TO OUTDOOR LOCATION / OUTDOOR SYSTEM. COILS TUBE EXPOSED IN THE XHOS. BUILT 52 Lx 4M, REMOVE THE TABLE W/ LAMP SHADE.



Indoor Unit Location : PHOT CORNER UP, OF BED.

Outdoor Unit Location : SAME LOCATION

Pipe Length : 27 FT

Special Note : _____

Installation Cost Estimate			
Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330 2430, 2520, 3520, 4620	17 FT	400	6800
Wire (Royal Cord-signal wire) (excess of 10ft) 2 0mmx4C	24 FT	100	2400
Wire (Royal Cord - Breaker to ODU) 5.5mm/ 5.5mm x 3C	14 FT	60	840
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd. / Fabricated) : (Floor / Wall)			
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2" 3/4"	2 pcs	150	300
PVC Pipe (electrical) 3/4" T			
Drain Pump			
Drain Pump Hose WATER 1/2"	7 FT	25	175
Chipping Works mtr			
Dismantling Fee (existing air-conditioner) 2.0			2500
Initial Charge			8500
TOTAL ESTIMATE			P 22,575 -

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature
Signature Over Printed Name

Customer Conforms:

Arten Battung
Signature Over Printed Name