

kolin

air conditioner

June 10, 2024

ATTY. ANTONETTE MANGRUBANG
42 J. JINGCO ST., PHILAMLIFE VILLAGE, PAMPLONA DOS, LAS PIÑAS CITY
TEL#: 0917-5781772

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER R-32	41,495.00	28,366.10	PHP	28,366.10
TOTAL UNIT COST					PHP	28,366.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	16,695.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	45,661.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

**** INSTALLATION C/O ASC**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved by:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-06-24-0523
REG-22%/4K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

25th
ANNIVERSARY
EST. 1996

Bringing comfort to your home.

KOLIN Philippines International Inc.
Survey Form

No 003477

Customer Name : XXX. ANTONETTE MANGROBANG
 Address : 415 JINGCO ST. PHILAM LIFE

Date : 6-7-24
 SJR No. : 206918

Establishment Type : Residential ☒
 Commercial ☐

Area Surveyed : LXNSI
 Area Surveyed : _____

Recommended Product Model : KSM-1W20-WCTOMM32

Cooling Capacity Computation

Floor Area : 13.5 sqm.
 Ceiling Height : 2.8 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>13.5</u>	x	550 Btu/h	<u>7425</u>	Btu/h
Ceiling Height (excess of 3 mtrs.) :	_____	x	20%	_____	Btu/h
Window Direct Sunlight	_____	x	40% - 50%	<u>2970</u>	Btu/h
Total Cooling Capacity					<u>10395</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>1</u>	x	300 Btu/h	<u>300</u>	Btu/h
No. of Ordinary Light (<40w)	<u>1</u>	x	200 Btu/h	<u>200</u>	Btu/h
No. of Special Light (>40w)	_____	x	400 Btu/h	_____	Btu/h
No. of Refrigerator (< 6 cu.ft.)	_____	x	400 Btu/h	_____	Btu/h
No. of Refrigerator (> 6 cu.ft.)	_____	x	800 Btu/h	_____	Btu/h
No. of Cooking Range	_____	x	1500 Btu/h	_____	Btu/h
No. of Laptop Computer	_____	x	150 Btu/h	_____	Btu/h
No. of Desktop Computer	_____	x	400 Btu/h	_____	Btu/h
No. of Printer	_____	x	500 Btu/h	_____	Btu/h
No. of Photocopier	_____	x	1000 Btu/h	_____	Btu/h
Total Cooling Capacity					<u>11795</u> Btu/h

Recommended Cooling Capacity

11795 Btu/h


Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern: CUSTOMER NEED TO PROVIDE PLYWOOD 3/4 INCH FOR BRACKET. EXPOSE COPPER TUBE IN THE AREA USE EXISTING POWER CABLE IN THE AREA. MAKE HOLE AT THE SCREEN. COPPER TUBE GOING DOWN SIDE OF WINDOW. SEWER AFTER INSTALLATION.

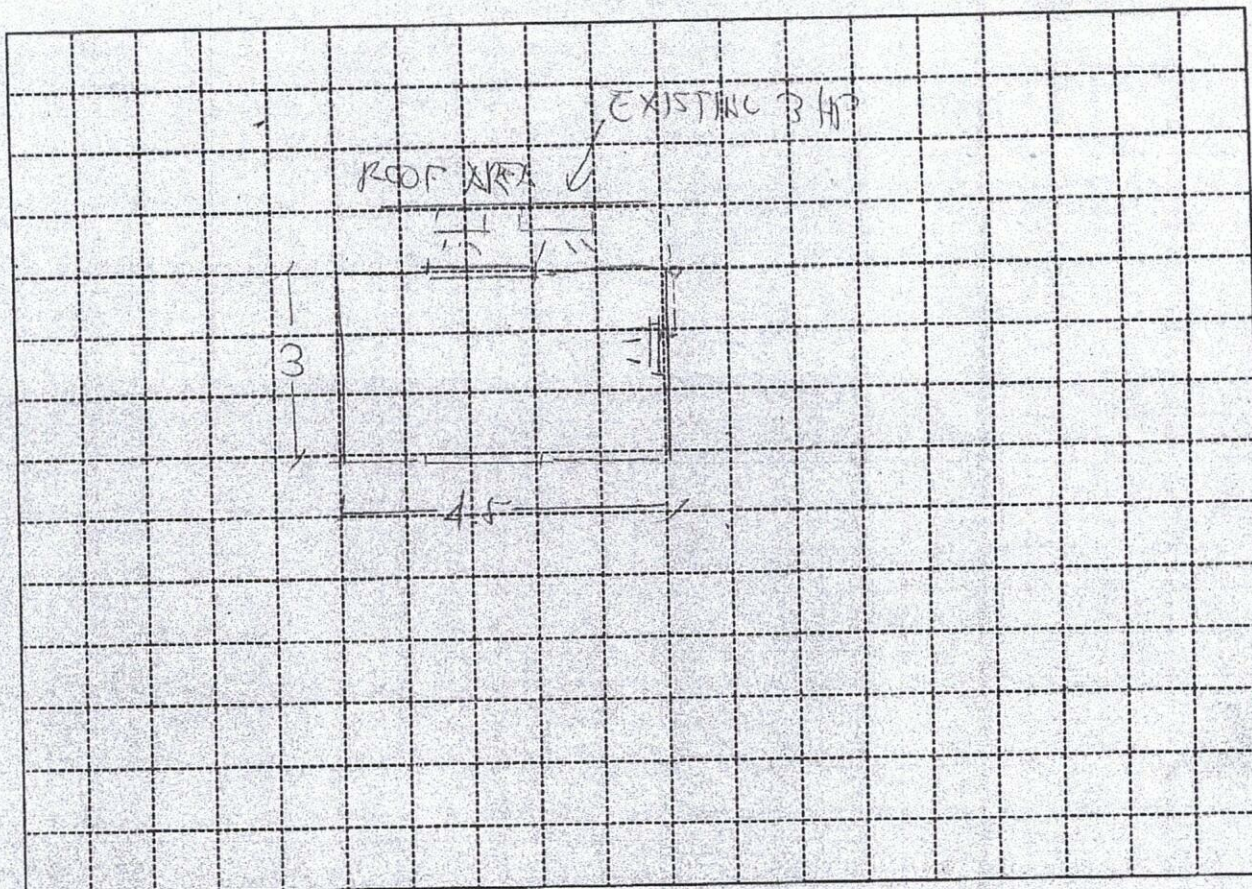

Indoor Unit Location : CENTER OF AREA, UP OF WINDOW
 Outdoor Unit Location : LEFT OF EXISTING WINDOW OUTDOOR 3 HP
 Pipe Length : 24 FT
 Special Note : _____

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	14 FT	350	4900
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	21 FT	100	2100
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	17 FT	60	1020
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd. / Fabricated) ; (Floor / Wall)			
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2" (1/4")	1		
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Pump Hose 1/2" mtr.	7 FT	25	175
Chipping Works			
Dismantling Fee (existing air-conditioner)			2500
Initial Charge			
TOTAL ESTIMATE			P 16,695

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be **deducted** in the installation fee.

Prepared by:

JEFFREY D. DIOS
 Signature Over Printed Name

Customer Conforme:

Signature Over Printed Name