

kolin

air conditioner

May 14, 2024

CHC ESQUITIES
ATTN: MR. NICOLAS CHUA
The Esquire Center 412 Gomezville St. Brgy Addition Hills, Mandaluyong City
TEL#: 0917-564 8228

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	118,556.10	PHP	118,556.10
TOTAL UNIT COST					PHP	118,556.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	82,515.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	201,671.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING MOUNTED : ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.


NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOP NOTICE.
PRICES IS VAT INCLUSIVE.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by: 
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-05-24-0430
REG-22%/4K

Approved By: 
MS. EDITHA M. FLORES
AVP - FINANCE

Conforme: _____
SIGNATURE OVER PRINTED NAME

25th
ANNIVERSARY
EST. 1996

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

KOLIN Philippines International Inc.
Survey Form

Nº 003463

Customer Name : INFOSYS GROUP OF COMPANIES/CHC
 Address : THE ESCAPE CENTER 212 GOREVILLE ST
1367 DIVISION AVE. PASAY CITY

Date : 5-13-11
 SJR No. : 20993

Establishment Type : Residential ☐
 Commercial ☒

Area Surveyed : OFFICE AREA

Recommended Product Model : KLM-1660-X/M32-1 1

Cooling Capacity Computation

Floor Area : 166 sqm.
 Ceiling Height : 2.6 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>166</u>	x	550 Btu/h	<u>71300</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	
Window Direct Sunlight		x	20% - 50%	<u>18160</u> Btu/h
Total Cooling Capacity				<u>109560</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>35</u>	x	300 Btu/h	<u>10500</u> Btu/h
No. of Ordinary Light (<40w)	<u>30</u>	x	200 Btu/h	<u>6000</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer	<u>35</u>	x	400 Btu/h	<u>14000</u> Btu/h
No. of Printer	<u>2</u>	x	500 Btu/h	<u>1000</u> Btu/h
No. of Photocopier	<u>1</u>	x	1000 Btu/h	<u>1000</u> Btu/h
Total Cooling Capacity				<u>32500</u> Btu/h

Recommended Cooling Capacity

142060 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- | | | |
|-----------------------------------|--|---|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☐ Site ☐ No |
| 4. Service Ledge | ☒ Yes | ☐ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern;

CUSTOMER NEEDS TO PROVIDE POWER SUPPLY
AT THE OUTDOOR BRACKET - 6 PAX. WITH DRAINING
NEED TO OPEN CEILING, CUT THE WALL FOR
THE CONDENSATE DRAINAGE. NEED WORKER OUT TO UNDERSTAND
WITH EXISTING 2-3TR IF THE AREA
WORKING DAYS SUNDAY ONLY, 8AM-5PM

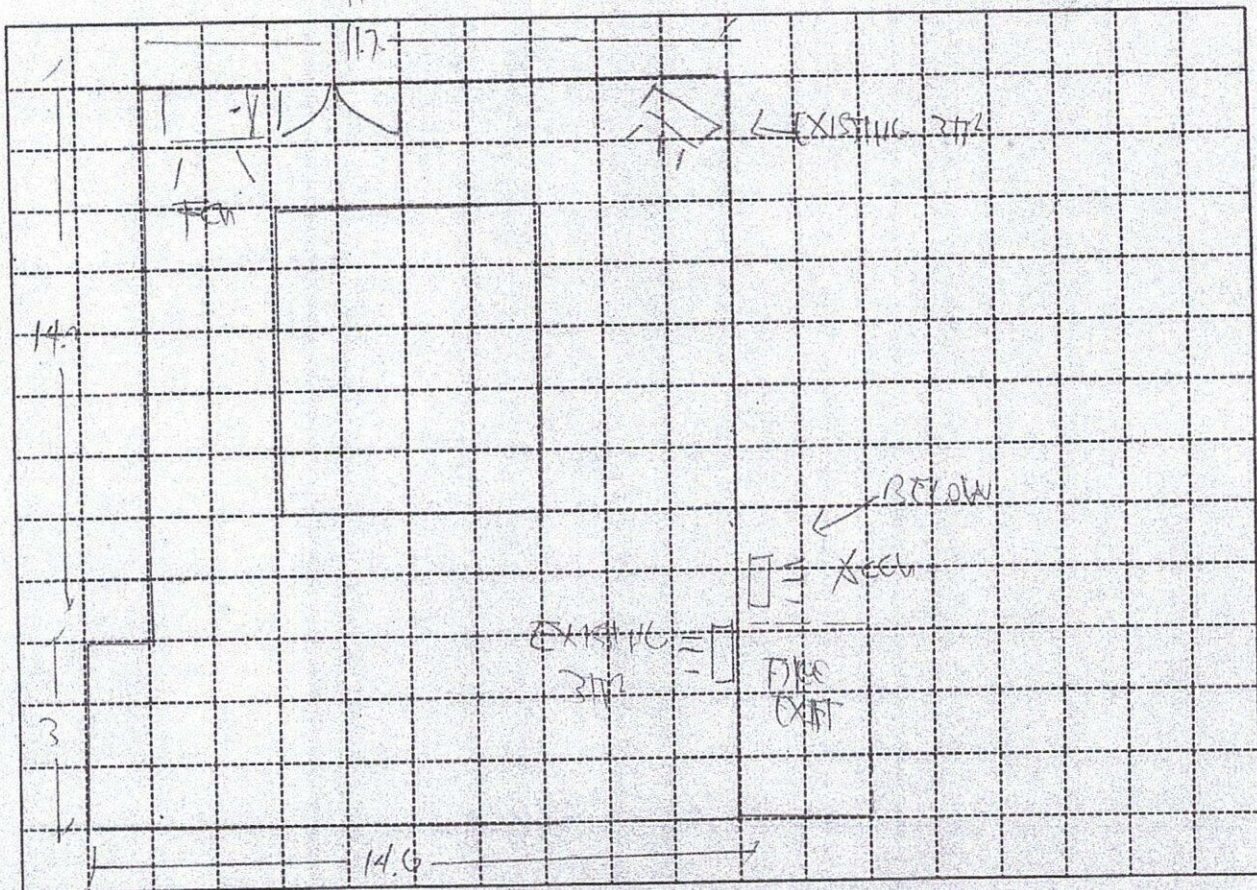

Indoor Unit Location :

Outdoor Unit Location :

Pipe Length :

Special Note :

FEET CORNER OF MAXIMUM
 AT THE SIDE OF FIRE EXIT
 35 METERS / 115 FT

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	105 FT	400	42000
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	112 FT	100	11200
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	7 FT	70	490
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) 1/1 Ledge (Imptd. / Fabricated) : (Floor / Wall)	1	6500	6500
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2", 3/4"	2 PCS	150	300
PVC Pipe (electrical) 3/4", 1"			
Drain Pump THURSEN INSULATION 1/2" x 3/4" x 6	12	350	4200
Drain Pump Hose WHITE 1/2"	7 FT	25	175
Chipping Works 1/1 (1/1 ZED)	mtr.	1650	1650
Initial Charge			15000
TOTAL ESTIMATE			P 82,515-

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be **deducted** in the installation fee.

Prepared by:

Signature Over Printed Name
 Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name
 Signature Over Printed Name