

kolin

air conditioner

May 27, 2024

THE BUILDING BY TYF
146 D. TUAZON ST., BRGY. LOURDES, QUEZON CITY
TEL#: 0917-7098076

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
15	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	171,395.00	125,688.10	PHP	1,885,321.50
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	111,995.00	80,356.10	PHP	80,356.10
2	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	67,695.00	48,802.10	PHP	97,604.20
TOTAL UNIT COST					PHP	2,063,281.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	1,250,280.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	3,314,161.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOP NOTICE.

PRICES IS VAT INCLUSIVE.


** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

** INSTALLATION C/O ASC

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

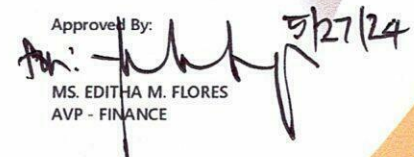
Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

 5/27/24
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-24-0494
REG-22%/8K/7K/4K

Conforme:

SIGNATURE OVER PRINTED NAME

ANNIVERSARY
EST. 1996

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

Bringing comfort to your home.

May 27, 2024
 THE BUILDING BY TYF
 146 D. Tuazon St. Brgy. Lourdes, Quezon City
 0917-7098076

MODEL	Qty
KLG-IF70-5G1M32	15
KLG-IF40-5G1M32	1
KSG-IWF-25WFY8K1M32	2

COVERED COURT	Area	690 sqm
----------------------	------	---------

ACU 1 7.0 HP Floor Standing Inverter *KLG-IF70-5G1M32*
 Estimated Pipe Length = 155 ft
 Estimated Royal Cord Length = 162 ft
Initial Charge ₱ 14,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	145 ft	₱ 400.00/ft	₱ 58,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	152 ft	₱ 100.00/ft	₱ 15,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	20 pc/s	₱ 300.00/pc	₱ 6,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 86,015.00

Estimated Charges	₱ 100,015.00
--------------------------	---------------------

ACU 2 7.0 HP Floor Standing Inverter *KLG-IF70-5G1M32*
 Estimated Pipe Length = 181 ft
 Estimated Royal Cord Length = 188 ft
Initial Charge ₱ 14,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	171 ft	₱ 400.00/ft	₱ 68,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	178 ft	₱ 100.00/ft	₱ 17,800.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	20 pc/s	₱ 300.00/pc	₱ 6,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 99,015.00

Estimated Charges	₱ 113,015.00
--------------------------	---------------------

ACU 3 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 174 ft

Estimated Royal Cord Length = 181 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	164 ft	P 400.00/ft	P 65,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	171 ft	P 100.00/ft	P 17,100.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	20 pc/s	P 300.00/pc	P 6,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 95,515.00

Estimated Charges P 109,515.00**ACU 4 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 158 ft

Estimated Royal Cord Length = 165 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	148 ft	P 400.00/ft	P 59,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	155 ft	P 100.00/ft	P 15,500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	20 pc/s	P 300.00/pc	P 6,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 87,515.00

Estimated Charges P 101,515.00**ACU 5 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 133 ft

Estimated Royal Cord Length = 140 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	123 ft	P 400.00/ft	P 49,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	130 ft	P 100.00/ft	P 13,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	15 pc/s	P 300.00/pc	P 4,500.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 73,515.00

Estimated Charges P 87,515.00

ACU 6 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 125 ft

Estimated Royal Cord Length = 132 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	115 ft	₱ 400.00/ft	₱ 46,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	122 ft	₱ 100.00/ft	₱ 12,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 66,455.00

Estimated Charges ₱ 80,455.00**ACU 7 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 99 ft

Estimated Royal Cord Length = 106 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	89 ft	₱ 400.00/ft	₱ 35,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	96 ft	₱ 100.00/ft	₱ 9,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 53,215.00

Estimated Charges ₱ 67,215.00**ACU 8 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 76 ft

Estimated Royal Cord Length = 83 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	66 ft	₱ 400.00/ft	₱ 26,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	73 ft	₱ 100.00/ft	₱ 7,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	10 pc/s	₱ 300.00/pc	₱ 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 43,515.00

Estimated Charges ₱ 57,515.00

ACU 9 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 56 ft

Estimated Royal Cord Length = 63 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	46 ft	P 400.00/ft	P 18,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	53 ft	P 100.00/ft	P 5,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 33,515.00

Estimated Charges P 47,515.00**ACU 10 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	33 ft	P 400.00/ft	P 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	P 100.00/ft	P 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 24,015.00

Estimated Charges P 38,015.00**ACU 11 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 47 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	37 ft	P 100.00/ft	P 3,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	4 pc/s	P 300.00/pc	P 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 23,715.00

Estimated Charges P 37,715.00

ACU 12 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 82 ft

Estimated Royal Cord Length = 89 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	72 ft	P 400.00/ft	P 28,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	79 ft	P 100.00/ft	P 7,900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 46,515.00

Estimated Charges P 60,515.00**ACU 13 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 105 ft

Estimated Royal Cord Length = 112 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	95 ft	P 400.00/ft	P 38,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	102 ft	P 100.00/ft	P 10,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 58,015.00

Estimated Charges P 72,015.00**ACU 14 7.0 HP Floor Standing Inverter****KLG-IF70-5G1M32**

Estimated Pipe Length = 125 ft

Estimated Royal Cord Length = 132 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	115 ft	P 400.00/ft	P 46,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	122 ft	P 100.00/ft	P 12,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 63,015.00

Estimated Charges P 77,015.00

ACU 15 7.0 HP Floor Standing Inverter**KLG-IF70-5G1M32**

Estimated Pipe Length = 145 ft

Estimated Royal Cord Length = 152 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	135 ft	₱ 400.00/ft	₱ 54,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	142 ft	₱ 100.00/ft	₱ 14,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	10 pc/s	₱ 300.00/pc	₱ 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 78,015.00

Estimated Charges ₱ 92,015.00**GYM**

Area 90 sqm

ACU 16 4.0 HP Floor Standing Inverter**KLG-IF40-5G1M32**

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 53 ft

Initial Charge**₱ 11,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	36 ft	₱ 400.00/ft	₱ 14,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	43 ft	₱ 100.00/ft	₱ 4,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 25,665.00

Estimated Charges ₱ 36,665.00**ACU 17 2.5 HP Wall Mounted Inverter****KSG-IWF-25WFY8K1M32**

Estimated Pipe Length = 69 ft

Estimated Royal Cord Length = 74 ft

Initial Charge**₱ 5,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	59 ft	₱ 400.00/ft	₱ 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	64 ft	₱ 100.00/ft	₱ 6,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	8 pc/s	₱ 300.00/pc	₱ 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 38,975.00

Estimated Charges ₱ 44,475.00

ACU 18 2.5 HP Wall Mounted Inverter**KSG-IWF-25WFY8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A/1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 22,075.00

Estimated Charges	P 27,575.00
--------------------------	--------------------

Total Estimated Charges	P 1,250,280.00
--------------------------------	-----------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units are recommendation only. For confirmation.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Customer Provide a catwalk atleast 1meter or more from the wall of area.
- 4 Need for site visit and marking for the final location of units,coppertube, drainline and outdoor location.
- 5 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 6 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 7 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformer:

Jeffrey Dadios

Field Supervisor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth ZamoraService Supervisor Shop and
Field Operation

May 27, 2024
THE BUILDING BY TYF
146 D. Tuazon St. Brgy. Lourdes, Quezon City
0917-7098076

Please be informed that the air-conditioner you intend purchase and to be installed on the said area exceeds the maximum required pipe length

Location	Unit Model	ACU #	Maximum Pipe Length		Estimated Pipe Length	
Covered Court	KLG-IF70-5G1M32	1	30. mtr	98. ft	47. mtr	155. ft
		2			55. mtr	181. ft
		3			53. mtr	174. ft
		4			48. mtr	158. ft
		5			41. mtr	133. ft
		6			38. mtr	125. ft
		13			32. mtr	105. ft
		14			38. mtr	125. ft
		15			44. mtr	1445. ft

Since the unit of your choice exceeds the maximum pipe length, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-1year).**

For your guidance and information

Prepared by:

Joeffrey Dadios
Surveyor

Approved by:

Mr. Alvin de Rivera
Service Manager

May 27, 2024

Noted by:

Engr. Kenneth Zamora
Service Supervisor
Field and Shop Operation

Customer Conforme:

Signature Over Printed Name