

# kolin

air conditioner

May 6, 2024

ATTN: MR. JESSE JANSSEN MUNOZ  
35 Poinsettia St., Tahanan Village, Brgy. BF Homes Parañaque City

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

## A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,495.00	34,606.10	PHP	34,606.10
TOTAL UNIT COST					PHP	34,606.10
OTHERS: DELIVERY CHARGE					PHP	600.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	15,265.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	50,471.10

### TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

### WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

### NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

INSTALLATION C/O AUTHORIZED SERVICE CENTER.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

Very Truly Yours,

  
JANELLE S. LIM

KMI-ACCOUNTING ASSISTANT

Noted by:




MART NATHANIEL R. FLORES

KMI-SUPERVISOR

KMI-QUOTE-04-24-0375

ECY-22%/4K

Approved By:



MS. EDITHA M. FLORES

AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

www.kolinphil.com.ph

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

ANNIVERSARY  
EST. 1996

Bringing comfort to your home.



**KOLIN Philippines International Inc.**  
**Survey Form**

**No 003449**

Customer Name: JESSE JANSSEN MANOT Date: 5-3-74  
 Address: 35 PINKITA ST. LAIBANAN VILLAGE 1ST SJR No.: 19661  
HOMESIDE SERVICE CO.  
 Establishment Type: Residential ☒ Area Surveyed: MASTER BEDROOM  
 Commercial ☐ Area Surveyed: \_\_\_\_\_  
 Recommended Product Model: KSM 1WK - WGTOM 1M32

**Cooling Capacity Computation**

Floor Area: 32.5 sqm.  
 Ceiling Height: 2.9 mtr.

**note:** add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area:	<u>32.5</u>	x	550 Btu/h	<u>17875</u> Btu/h
Ceiling Height (excess of 3 mtrs.):	<u>2.9</u>	x	20%	_____ Btu/h
Window Direct Sunlight		x	20% - 50%	_____ Btu/h
Total Cooling Capacity				<u>17875</u> Btu/h

**Add : Additional Heat Load**

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u> Btu/h
No. of Ordinary Light (<40w)	<u>5</u>	x	200 Btu/h	<u>1000</u> Btu/h
No. of Special Light (>40w)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (< 6 cu.ft.)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (> 6 cu.ft.)	_____	x	800 Btu/h	_____ Btu/h
No. of Cooking Range	_____	x	1500 Btu/h	_____ Btu/h
No. of Laptop Computer	_____	x	150 Btu/h	_____ Btu/h
No. of Desktop Computer <u>1</u>	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer	_____	x	500 Btu/h	_____ Btu/h
No. of Photocopier	_____	x	1000 Btu/h	_____ Btu/h
Total Cooling Capacity				<u>2900</u> Btu/h

**Recommended Cooling Capacity**

2.2  
19875 Btu/h

**Note :** Compressor warranty will be reduced to \_\_\_\_ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


**Scope of Work Agreement**

- |                                   |  |  |
|-----------------------------------|--|--|
| 1. Copper tube lay-out            | <input checked="" type="checkbox"/> Expose                 | <input type="checkbox"/> Embedded                                    |
| 2. Chipping                       | <input type="checkbox"/> Included                          | <input checked="" type="checkbox"/> Not Included                     |
| 3. Fabricated Bracket             | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge                  | <input type="checkbox"/> Yes                               | <input checked="" type="checkbox"/> No                               |
| 5. Dismantling of existing Aircon | <input checked="" type="checkbox"/> Included               | <input type="checkbox"/> Not Included                                |
| 6. Ducting                        | <input type="checkbox"/> Yes                               | <input checked="" type="checkbox"/> No                               |

**Dimension :** \_\_\_\_\_

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern; DISMANTLE AND INSTALL NEW COPPER TUBE, OUTDOOR  
BRACKET AND BRACKET. REPAIR ADDRESS AND  
ROPE & PAX -  
EXPLORE COPPER TUBE W/ DIMENSION IN THE AREA.



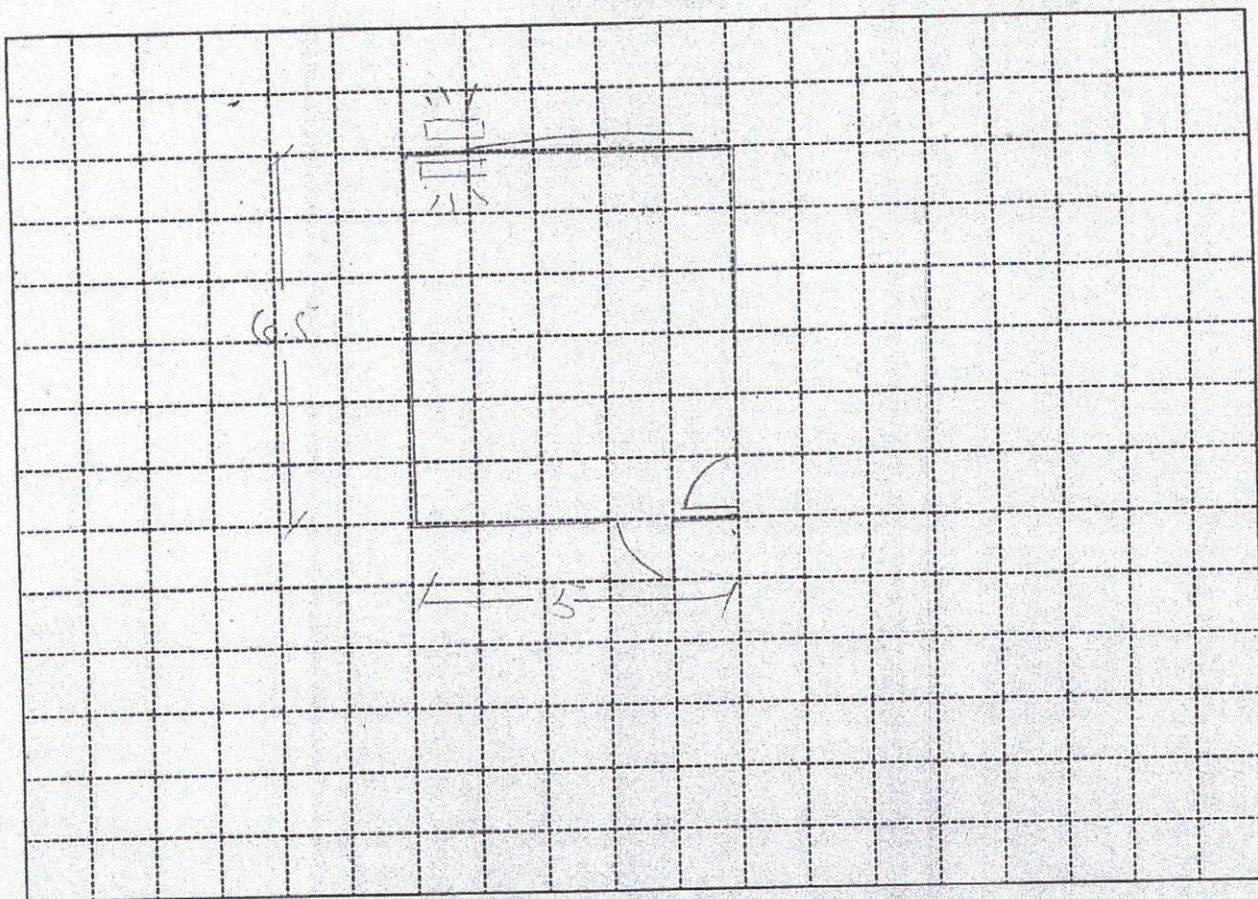

Indoor Unit Location : SAME LOCATION, LEFT CORNER WALL  
 Outdoor Unit Location : AT THE BACK OF OF EXHIBIT  
 Pipe Length : 4 METERS / 14 FT  
 Special Note :

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	4 FT	400	1600
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	1 FT	100	100
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	4 FT	60	240
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd. / Fabricated) ; (Floor / Wall)			
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2", 3/4"	1	150	150
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Pump Hose WHITE 1/2"	7 FT	X	175
Chipping Works	mtr.		
Dismantling Fee (existing air-conditioner) 2.5 HP			2500
Initial Charge			8500
TOTAL ESTIMATE		P 15,265	

## Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name