



November 15, 2024

MR. ARMANDO PO
LOT 14 & 16, STA. ANA ST., MAGALLANES VILLAGE, MAKATI CITY
Email: mandyt.po@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10	PHP	162,584.20
5	UNIT/S	MODEL: KSG-IWF-30Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	52,744.10	PHP	263,720.50
3	UNIT/S	MODEL: KSG-IWF-25Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	46,816.10	PHP	140,448.30
4	UNIT/S	MODEL: KSG-IWF-20Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	39,484.10	PHP	157,936.40
2	UNIT/S	MODEL: KSG-IWF-15Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	29,344.10	PHP	58,688.20
1	UNIT/S	MODEL: KSG-IWF-10Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	26,224.10	PHP	26,224.10
TOTAL UNIT COST					PHP	809,601.70
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	686,485.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL UNIT COST					PHP	1,496,686.70

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL A. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-11-24-0962
REG-22%/7K

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



November 15, 2024
 ARMANDO PO
 LOT 14 & 16, STA. ANA ST., MAGALLANES VILLAGE, MAKATI CITY

MODEL	Qty
KLG-IF40-5G1M32	2
KSG-IWF-30Wfy8K1M32	5
KSG-IWF-25Wfy8K1M32	3
KSG-IWF-20Wfy8K1M32	4
KSG-IWF-15Wfy8K1M32	2
KSG-IWF-10Wfy8K1M32	1

GROUND FLOOR

LIVING /FOYER	Area	62 sqm
---------------	------	--------

ACU 1	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32	
	Estimated Pipe Length = 86 ft		
	Estimated Royal Cord Length = 93 ft		
	Initial Charge		P 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	76 ft	P 400.00/ft	P 30,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	83 ft	P 100.00/ft	P 8,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	12 pc/s	P 350.00/pc	P 4,200.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	16 pc/s	P 120.00/pc	P 1,920.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 51,785.00

Estimated Charges	P 62,785.00
-------------------	-------------

ACU 2	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32	
	Estimated Pipe Length = 96 ft		
	Estimated Royal Cord Length = 103 ft		
	Initial Charge		P 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	86 ft	P 400.00/ft	P 34,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	93 ft	P 100.00/ft	P 9,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	14 pc/s	P 350.00/pc	P 4,900.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	20 pc/s	P 120.00/pc	P 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 57,965.00

Estimated Charges	P 68,965.00
-------------------	-------------

DINING / KITCHEN	Area 45.8 sqm
-------------------------	---------------

ACU 3

3.0 HP Wall Mounted Inverter

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 48 ft

Initial Charge

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description

Qty

Price per qty

Subtotal

Copper Tube

Ø 1/4" x Ø 5/8"

33 ft

₱ 350.00/ft

₱ 11,550.00

Royal Cord (comm. wire)

2.mm2 x 4C

38 ft

₱ 100.00/ft

₱ 3,800.00

Royal Cord (ACCU-Breaker)

3.5mm x 3c

7 ft

₱ 60.00/ft

₱ 420.00

Circuit Breaker waterproof

30A/ 1ph

1 pc/s

₱ 1,000.00/pc

₱ 1,000.00

Rubber Insulation

2 1/8" x 3/4" x 6'

5 pc/s

₱ 350.00/pc

₱ 1,750.00

Full thread

3/8" x 10'

2 pc/s

₱ 150.00/pc

₱ 300.00

Metal Clamp

3"

8 pc/s

₱ 120.00/pc

₱ 960.00

Drain Hose

White -1/2"

7 ft

₱ 25.00/ft

₱ 175.00

₱ 19,955.00

Estimated Charges

₱ 28,455.00

KSG-IWF-30Wfy8K1M32

ACU 4	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length	=	46	ft	
	Estimated Royal Cord Length	=	51	ft	
	Initial Charge				P 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	36 ft	P 350.00/ft	P 12,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	P 100.00/ft	P 4,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
	Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	P 350.00/pc	P 1,750.00
	Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
	Metal Clamp	3"	8 pc/s	P 120.00/pc	P 960.00
	Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
					<u>P 21,305.00</u>
	Estimated Charges				P 29,805.00

ALTAR		Area	12.6 sqm
ACU 5	1.0 HP Wall Mounted Inverter	KSG-IWF-10Wfy8K1M32	
	Estimated Pipe Length = 78 ft		
	Estimated Royal Cord Length = 83 ft		
	Initial Charge		₱ 7,500.00
	Includes:		
	Labor		
	10ft Copper Tube		
	10ft Royal Cord		
	Outdoor Bracket (Wall)		
	Consumables		
Installation Materials	Description	Qty	Price per qty
Copper Tube	Ø 1/4" x Ø 3/8"	68 ft	₱ 350.00/ft
Royal Cord (comm. wire)	2.mm2 x 4C	73 ft	₱ 100.00/ft
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft
Circuit Breaker waterproof	20A/ 1ph	1 pc/s	₱ 1,000.00/pc
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc
Metal Clamp	3"	14 pc/s	₱ 120.00/pc
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft
			₱ 38,175.00
Estimated Charges			₱ 45,675.00

MAJHONG	Area	26.9 sqm
----------------	------	----------

ACU 6	1.5 HP Wall Mounted Inverter	KSG-IWF-15Wfy8K1M32			
	Estimated Pipe Length	= 82 ft			
	Estimated Royal Cord Length	= 87 ft			
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	72 ft	₱ 350.00/ft	₱ 25,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	77 ft	₱ 100.00/ft	₱ 7,700.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	20A/ 1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
	Metal Clamp	3"	14 pc/s	₱ 120.00/pc	₱ 1,680.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 39,975.00
	Estimated Charges				₱ 47,475.00

ACU 7	1.5 HP Wall Mounted Inverter	KSG-IWF-15Wfy8K1M32			
	Estimated Pipe Length	= 86 ft			
	Estimated Royal Cord Length	= 91 ft			
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	76 ft	₱ 350.00/ft	₱ 26,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C	81 ft	₱ 100.00/ft	₱ 8,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	20A/ 1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
	Metal Clamp	3"	14 pc/s	₱ 120.00/pc	₱ 1,680.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 41,775.00
	Estimated Charges				₱ 49,275.00

SECOND FLOOR

MASTER BEDROOM WIC	Area	24.2 sqm
---------------------------	------	----------

ACU 8	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32			
	Estimated Pipe Length	= 33 ft			
	Estimated Royal Cord Length	= 38 ft			
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2"	23 ft	₱ 350.00/ft	₱ 8,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	₱ 100.00/ft	₱ 2,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A/ 1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 12,445.00
	Estimated Charges				₱ 19,945.00

MASTER BEDROOM	Area 41.4 sqm
-----------------------	---------------

ACU 9 2.0 HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32
------------------------------------	---------------------

Estimated Pipe Length = 46 ft
 Estimated Royal Cord Length = 51 ft

Initial Charge

P 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	36 ft	P 350.00/ft	P 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	P 100.00/ft	P 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 22,595.00

Estimated Charges	P 30,095.00
--------------------------	-------------

ACU 10 2.0 HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32
-------------------------------------	---------------------

Estimated Pipe Length = 60 ft
 Estimated Royal Cord Length = 65 ft

Initial Charge

P 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	50 ft	P 350.00/ft	P 17,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	55 ft	P 100.00/ft	P 5,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 28,895.00

Estimated Charges	P 36,395.00
--------------------------	-------------

TV AREA	Area 27.15 sqm
----------------	----------------

ACU 11 3.0 HP Wall Mounted Inverter	KSG-IWF-30WFY8K1M32
-------------------------------------	---------------------

Estimated Pipe Length = 63 ft
 Estimated Royal Cord Length = 68 ft

Initial Charge

P 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	53 ft	P 350.00/ft	P 18,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	58 ft	P 100.00/ft	P 5,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 30,245.00

Estimated Charges	P 38,745.00
--------------------------	-------------

FAMILY AREA	Area 43.25 sam
--------------------	----------------

ACU 12 2.5 HP Wall Mounted Inverter**KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 79 ft

Estimated Royal Cord Length = 84 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	69 ft	P 350.00/ft	P 24,150.00
Royal Cord (comm. wire)	2.mm2 x 4C	74 ft	P 100.00/ft	P 7,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	12 pc/s	P 120.00/pc	P 1,440.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 38,035.00

Estimated Charges**P 46,535.00****ACU 13 2.5 HP Wall Mounted Inverter****KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 86 ft

Estimated Royal Cord Length = 91 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	76 ft	P 350.00/ft	P 26,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	81 ft	P 100.00/ft	P 8,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	12 pc/s	P 350.00/pc	P 4,200.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	12 pc/s	P 120.00/pc	P 1,440.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 42,235.00

Estimated Charges**P 50,735.00****BEDROOM 1**

Area 24 sqm

ACU 14 2.5 HP Wall Mounted Inverter**KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 79 ft

Estimated Royal Cord Length = 84 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	69 ft	P 350.00/ft	P 24,150.00
Royal Cord (comm. wire)	2.mm2 x 4C	74 ft	P 100.00/ft	P 7,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	P 350.00/pc	P 3,150.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	12 pc/s	P 120.00/pc	P 1,440.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 38,035.00

Estimated Charges**P 46,535.00**

THIRD FLOOR

GUESTROOM	Area	20 sqm
------------------	------	--------

ACU 15 2.0 HP Wall Mounted Inverter	KSG-IWF-20WFF8K1M32
-------------------------------------	---------------------

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 51 ft

Initial Charge

P 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	36 ft	P 350.00/ft	P 12,600.00
Royal Cord (comm. wire)	41 ft	P 100.00/ft	P 4,100.00
Royal Cord (ACCU-Breaker)	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s P 150.00/pc	P 300.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Drain Hose	White -1/2"	7 ft P 25.00/ft	P 175.00
			P 21,655.00

Estimated Charges

P 29,155.00

ENTERTAINMENT	Area	60.2 sqm
----------------------	------	----------

ACU 16 3.0 HP Wall Mounted Inverter	KSG-IWF-30WFF8K1M32
-------------------------------------	---------------------

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 38 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)	28 ft	P 100.00/ft	P 2,800.00
Royal Cord (ACCU-Breaker)	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s P 350.00/pc	P 1,750.00
Full thread	3/8" x 10'	2 pc/s P 150.00/pc	P 300.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Drain Hose	White -1/2"	7 ft P 25.00/ft	P 175.00
			P 15,455.00

Estimated Charges

P 23,955.00

ACU 17 3.0 HP Wall Mounted Inverter	KSG-IWF-30WFF8K1M32
-------------------------------------	---------------------

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	40 ft	P 350.00/ft	P 14,000.00
Royal Cord (comm. wire)	45 ft	P 100.00/ft	P 4,500.00
Royal Cord (ACCU-Breaker)	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s P 350.00/pc	P 2,100.00
Full thread	3/8" x 10'	2 pc/s P 150.00/pc	P 300.00
Metal Clamp	3"	8 pc/s P 120.00/pc	P 960.00
Drain Hose	White -1/2"	7 ft P 25.00/ft	P 175.00
			P 23,455.00

Estimated Charges


P 31,955.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Proposed Installation cost, location of indoor and outdoor units are based in floor plan. Subject for approval
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Copper tube lay out are subject for approval since majority of the recommended capacity for the area exceeds the maximum pipe length, then so compressor warranty will be reduced.
- 5 Drain line for air conditioning units should be provided by customers contractor.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 9 Final charges will be based on actual installation.


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformer:


Signature Over Printed Name

Reviewed by:



Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

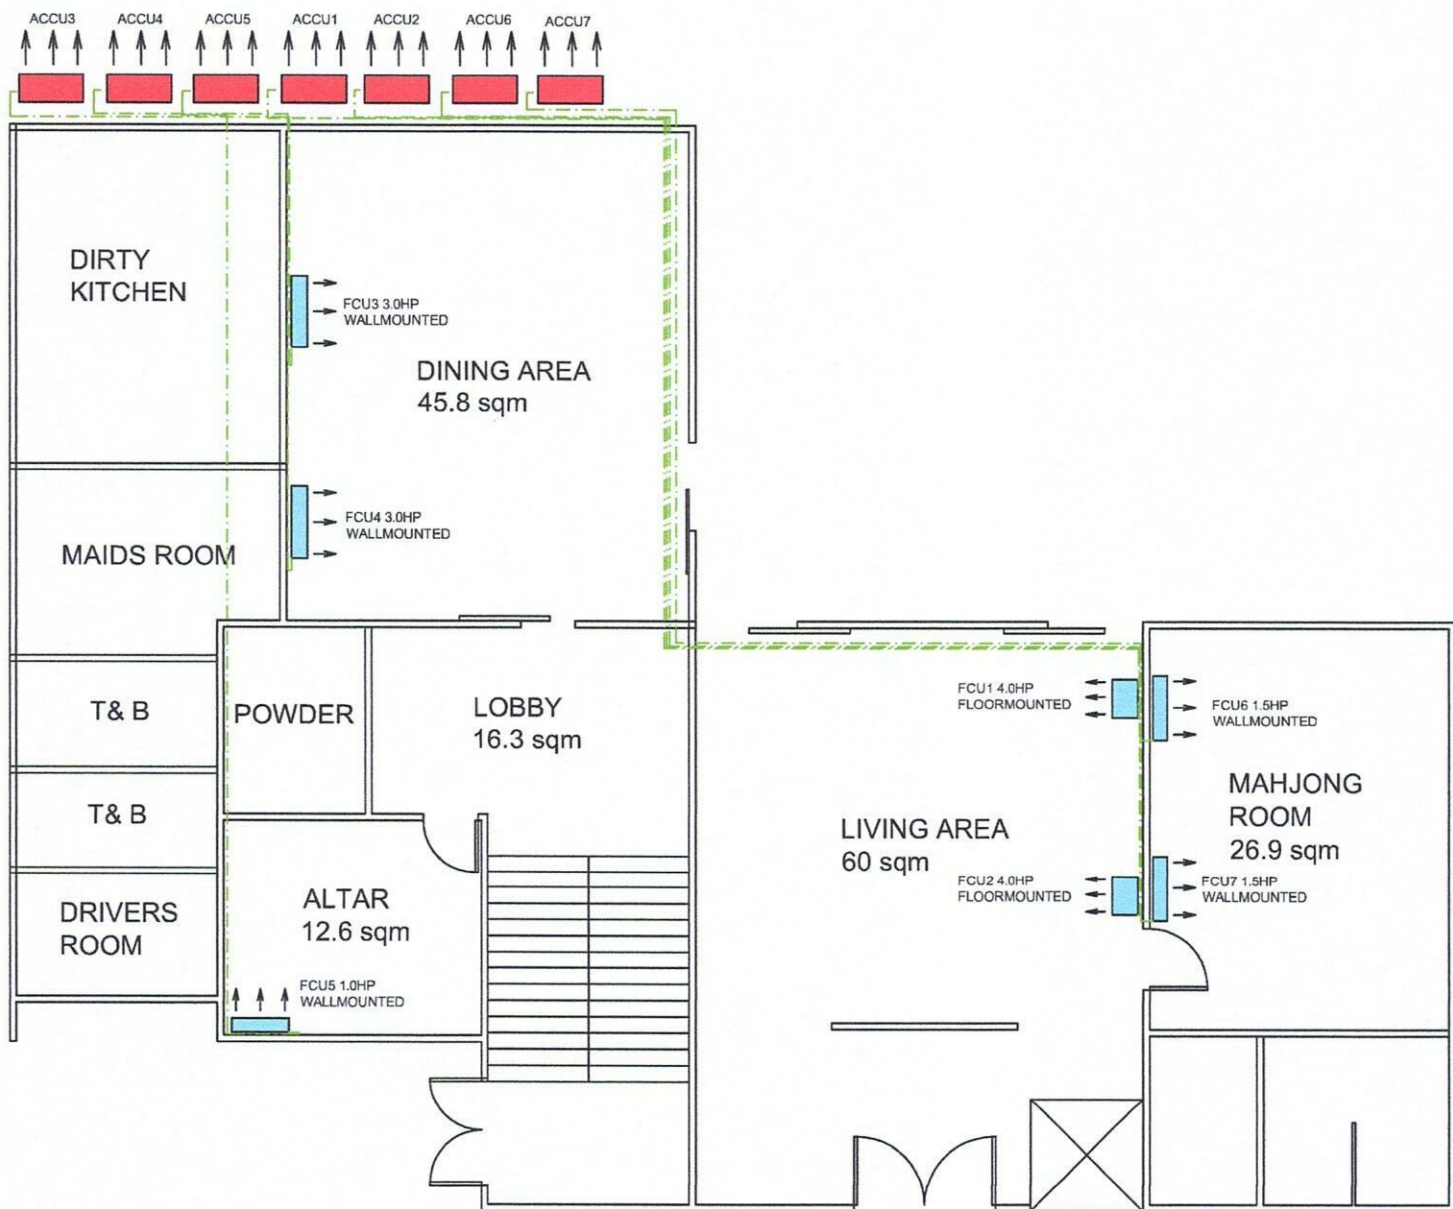

GROUND FLOOR

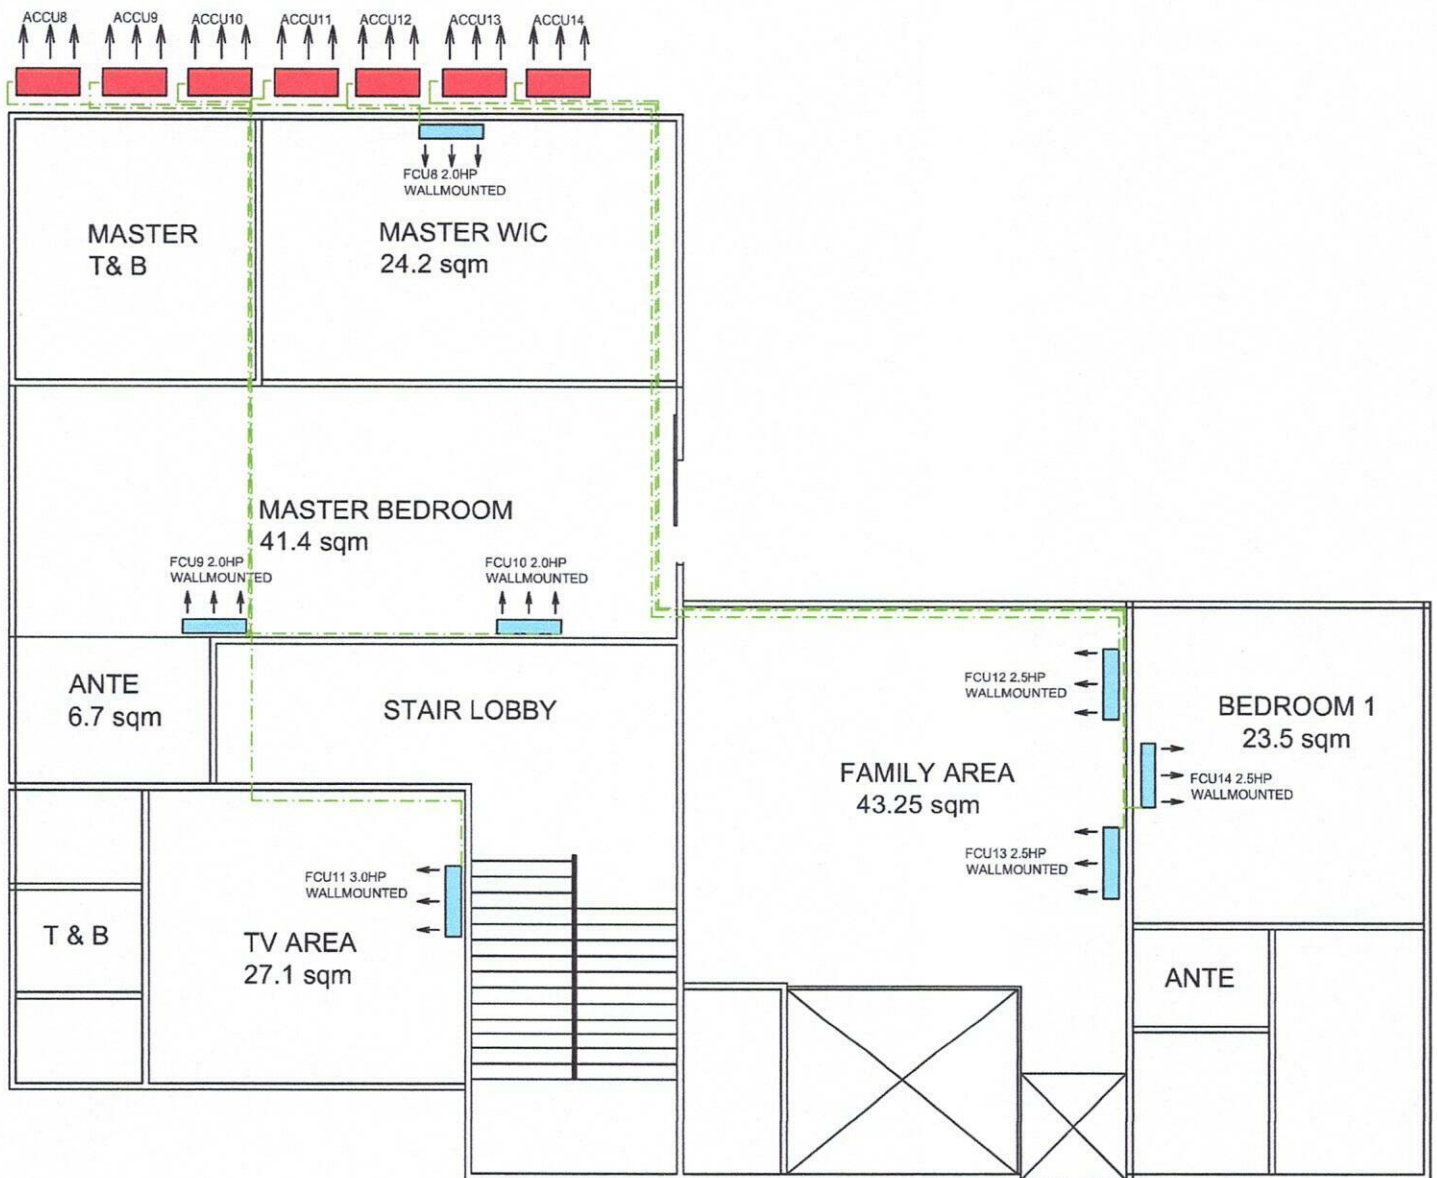

SECOND FLOOR

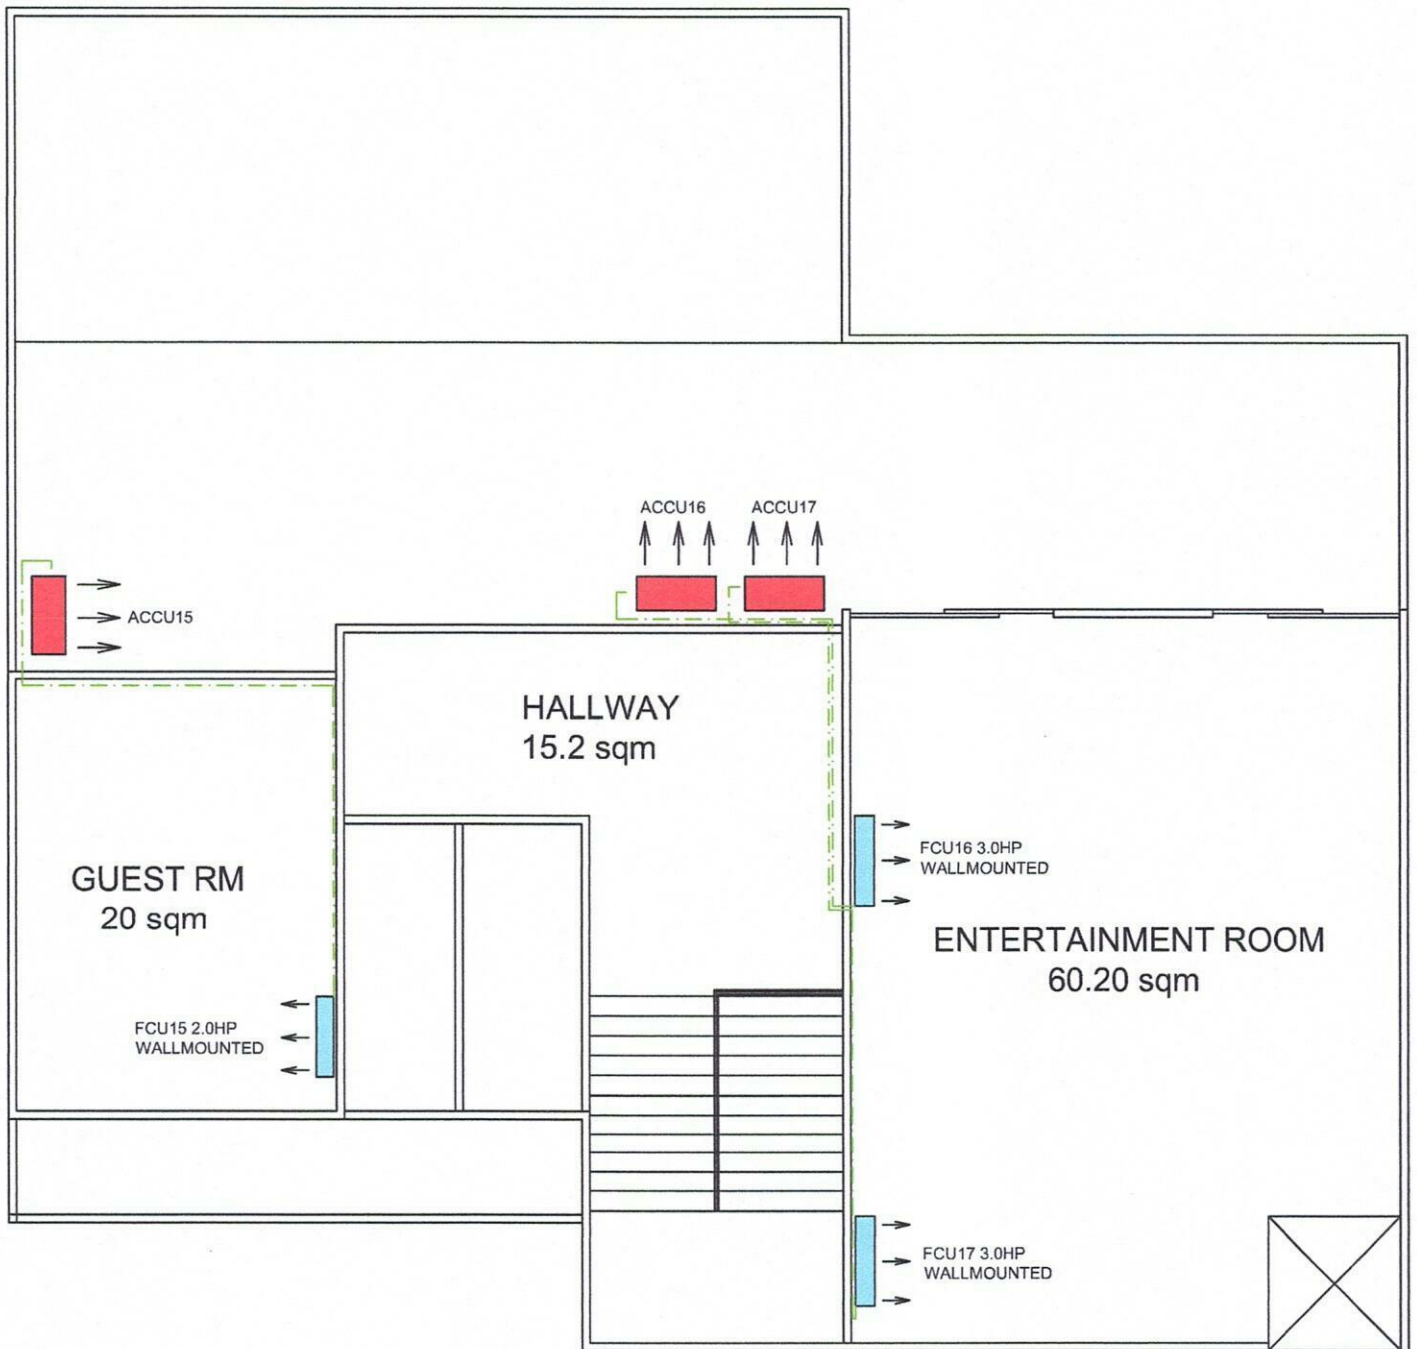

ATTIC FLOOR