



November 15, 2024

STATE CENTER
UNIT 1414, 333 JUAN LUNA ST., BINONDO MANILA
TEL#: 0908-9526124

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10	PHP	81,292.10
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	34,996.10	PHP	34,996.10
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER R-32	32,995.00	21,736.10	PHP	21,736.10
TOTAL UNIT COST					PHP	138,024.30
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	72,080.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL UNIT COST					PHP	210,704.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-11-24-0964
ECY-22%/7K/4K

Conforme:

SIGNATURE OVER PRINTED NAME



NOVEMBER 15, 2024

STATE CENTER

State Center Bldg. Unit 1412, 333 Juan Luna St. Binondo, Manila

0908-9526124

Model	Qty
KLG-IF40-5G1M32	1
KSM-IW25-WCT10M1M32	1
KSM-IW15-WCT10M1M32	1

UNIT 1414

OPEN AREA	Area ≈ 44 sq.m
-----------	----------------

ACU 2	4.0hp Wallmounted Inverter	KLG-IF40-5G1M32
Estimated Pipe Length :	17	ft
Estimated Royal Cord Length :	24	ft
Initial Charge		P 11,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	7 ft	P 400.00 / ft	P 2,800.00
Royal Cord	2.mm2 x 4C	14 ft	P 100.00 / ft	P 1,400.00
Royal Cord (ODU-Breaker)	5.0mm2 x 3C	7 ft	P 70.00 / ft	P 490.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(Wall)	Galvanised	1 pc(s)	P 1,650.00 / pc	P 1,650.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00
				P 7,515.00

Estimated Charges	P 18,515.00
-------------------	-------------

ROOM1	Area ≈ 23.3 sq.m
-------	------------------

ACU 2	2.5hp Wallmounted Inverter	KSM-IW25-WCT10M1M32
Estimated Pipe Length :	20	ft
Estimated Royal Cord Length :	25	ft
Initial Charge		P 8,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (wall)
Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	10 ft	P 400.00 / ft	P 4,000.00
Royal Cord	2.mm2 x 4C	15 ft	P 100.00 / ft	P 1,500.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00
				P 7,095.00

Estimated Charges	P 15,595.00
-------------------	-------------

ROOM2

Area ≈ 13 sq.m

ACU 3

1.5hp Wallmounted Inverter

'KSM-IWI5-WCT10M1M32

Estimated Pipe Length :

60

ft

Estimated Royal Cord Length :

65

ft

Initial Charge

P

7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

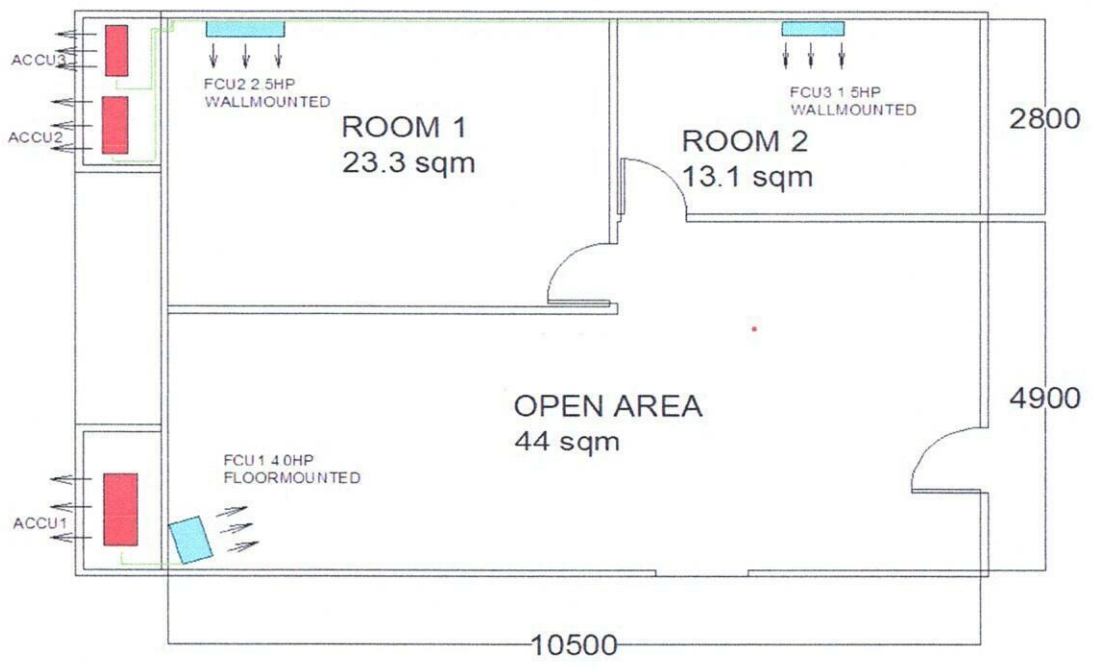
Outdoor Bracket (wall)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	50 ft	P 350.00 / ft	P 17,500.00
Royal Cord	2.mm2 x 4C	55 ft	P 100.00 / ft	P 5,500.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	6 pc(s)	P 350.00 / pc	P 2,100.00
Drain pump	realise	1 pc(s)	P 2,900.00 / pc	P 2,900.00
Drain Hose	green- 1/4"	60 ft	P 10.00 / pc	P 600.00
PVC(drainline)	BLUE - 3/4"	3 pc(s)	P 150.00 / pc	P 450.00
				P 30,470.00

Estimated Charges

P 37,970.00



Total Estimated Charges

P 72,080.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Working days: Monday to Saturday, 8am- 5pm without parking.
- 4 Mechanical Plans, Permits, Electrical permits not included.
- 5 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 6 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 7 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformer:

Jeoffrey Dadios

Field Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor

Field and Shop Operation