



October 29, 2024

MR. JACKSON SYCHINGHO
9 KENNEDY ST. BRGY. NORTH GREENHILLS, SAN JUAN CITY
TEL#: 0919-0090211

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
4	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	81,292.10 ↓	PHP	325,168.40
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	46,816.10 ↓	PHP	46,816.10
4	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	39,484.10 ↓	PHP	157,936.40
4	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	29,344.10 ↓	PHP	117,376.40
TOTAL UNIT COST					PHP	647,297.30
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	394,010.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,041,907.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

** INSTALLATION C/O ASP (cost will be based on actual)

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MARFATH MANUEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-10-24-0927
ECY-22%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



OCTOBER 26, 2024
 JACKSON SYCHINGHO
 9 Kennedy St. Brgy North Greenhills, San Juan City Metro Manila
 0919-0090211

MODEL	Qty
KLG-IF40-5G1M32	4
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	4
KSG-IWF-15Wfy8K1M32	4

GROUND FLOOR

LIVING/DINING/KITCHEN A	Area	112 sqm
-------------------------	------	---------

ACU 1	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32	
	Estimated Pipe Length = 56 ft		
	Estimated Royal Cord Length = 63 ft		
	Initial Charge		₱ 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	46 ft	₱ 400.00/ft	₱ 18,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	53 ft	₱ 100.00/ft	₱ 5,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 32,265.00

Estimated Charges	₱ 43,265.00
--------------------------	-------------

ACU 2	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32	
	Estimated Pipe Length = 13 ft		
	Estimated Royal Cord Length = 20 ft		
	Initial Charge		₱ 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	3 ft	₱ 400.00/ft	₱ 1,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	10 ft	₱ 100.00/ft	₱ 1,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 8,965.00

Estimated Charges	₱ 19,965.00
--------------------------	-------------

LIVING/DINING/KITCHEN B

Area 112 sqm

ACU 3 4.0 HP Floor Standing Inverter**KLG-IF40-5G1M32**

Estimated Pipe Length = 82 ft

Estimated Royal Cord Length = 89 ft

Initial Charge

P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	72 ft	P 400.00/ft	P 28,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	79 ft	P 100.00/ft	P 7,900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/ 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	12 pc/s	P 350.00/pc	P 4,200.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	14 pc/s	P 120.00/pc	P 1,680.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 49,645.00

Estimated Charges**P 60,645.00****ACU 4 4.0 HP Floor Standing Inverter****KLG-IF40-5G1M32**

Estimated Pipe Length = 56 ft

Estimated Royal Cord Length = 63 ft

Initial Charge

P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	46 ft	P 400.00/ft	P 18,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	53 ft	P 100.00/ft	P 5,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	40A/ 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	P 350.00/pc	P 2,800.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	3/4" x 10'	1 pc/s	P 150.00/pc	P 150.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 34,765.00

Estimated Charges**P 45,765.00**

ROOM1	Area	17 sqm
--------------	------	--------

ACU 5 1.5 HP Wall Mounted Inverter

KSG-IWF-15Wfy8K1M32

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 38 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	₱ 350.00/ft	₱ 8,050.00
Royal Cord (comm. wire)	28 ft	₱ 100.00/ft	₱ 2,800.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3 pc/s	₱ 120.00/pc	₱ 360.00
PVC blue	2 pc/s	₱ 150.00/pc	₱ 300.00
			₱ 13,660.00

Estimated Charges

₱ 21,160.00

OFFICE	Area	18.7 sqm
---------------	------	----------

ACU 6 1.5 HP Wall Mounted Inverter

KSG-IWF-15Wfy8K1M32

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length = 32 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	17 ft	₱ 350.00/ft	₱ 5,950.00
Royal Cord (comm. wire)	22 ft	₱ 100.00/ft	₱ 2,200.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3 pc/s	₱ 120.00/pc	₱ 360.00
PVC blue	1 pc/s	₱ 150.00/pc	₱ 150.00
			₱ 10,810.00

Estimated Charges

₱ 18,310.00

2ND FLOOR

BEDROOM2	Area	21.6 sqm
-----------------	------	----------

ACU 7 2.0 HP Wall Mounted Inverter**KSG-IWF-20WFY8K1M32**

Estimated Pipe Length = 36 ft

Estimated Royal Cord Length = 41 ft

Initial Charge**₱ 7,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	26 ft	₱ 350.00/ft	₱ 9,100.00
Royal Cord (comm. wire)	31 ft	₱ 100.00/ft	₱ 3,100.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	7 pc/s	₱ 120.00/pc	₱ 840.00
PVC blue	1 pc/s	₱ 150.00/pc	₱ 150.00
			₱ 16,540.00

Estimated Charges**₱ 24,040.00****BEDROOM3**

Area 21.4 sqm

ACU 8 2.0 HP Wall Mounted Inverter**KSG-IWF-20WFY8K1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge**₱ 7,500.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	40 ft	₱ 350.00/ft	₱ 14,000.00
Royal Cord (comm. wire)	45 ft	₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Full thread	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	1 pc/s	₱ 150.00/pc	₱ 150.00
			₱ 23,310.00

Estimated Charges**₱ 30,810.00**

BEDROOM1	Area	17 sqm
-----------------	------	--------

ACU 9 1.5 HP Wall Mounted Inverter

KSG-IWF-15WFY8K1M32

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 48 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	33 ft	₱ 350.00/ft	₱ 11,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	38 ft	₱ 100.00/ft	₱ 3,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	20A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 20,160.00

Estimated Charges

₱ 27,660.00

MASTER BEDROOM A	Area	30 sqm
-------------------------	------	--------

ACU 10 2.5 HP Wall Mounted Inverter

KSG-IWF-25WFY8K1M32

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	40 ft	₱ 350.00/ft	₱ 14,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 24,250.00

Estimated Charges

₱ 32,750.00

Area	23 sqm
------	--------

KSG-IWF-20WFY8K1M32

Estimated Royal Cord Length = 48 ft

₱ 7,500.00

Labor

10ft Copper Tube

Outdoor Bracket (Wall)

Consumables

Subtotal

P 11,550.00

P 3,800.00

₱ 420.00

₱ 1,000.00

₱ 2,100.00

₱ 300.00

P 150.00

₱ 19,320.00

P 26,820.00

Area	20 sqm
------	--------

KSG-IWF-15WFY8K1M32

Estimated Royal Cord Length = 25 ft

₱ 7,500.00

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Subtotal

₱ 3,500.00

₱ 1,500.00

₱ 300.00

P 1,000.00

₱ 350.00

₱ 150.00

₱ 360.00

₱ 150.00

₱ 7,310.00

P 14,810.00

MOTHERS ROOM	Area	21.5 sqm
---------------------	------	----------

ACU 10 2.0 HP Wall Mounted Inverter

KSG-IWF-20Wfy8K1M32

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 48 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	33 ft	₱ 350.00/ft	₱ 11,550.00
Royal Cord (comm. wire)	38 ft	₱ 100.00/ft	₱ 3,800.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	7 pc/s	₱ 350.00/pc	₱ 2,450.00
Full thread	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	1 pc/s	₱ 150.00/pc	₱ 150.00
			₱ 20,510.00

Estimated Charges	₱ 28,010.00
--------------------------	--------------------


Total Estimated Charges	₱ 394,010.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 **ACU1, ACU2, ACU3 and ACU4 need to operate at the same time TO AVOID UNDERCAPACITY.**
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformee:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

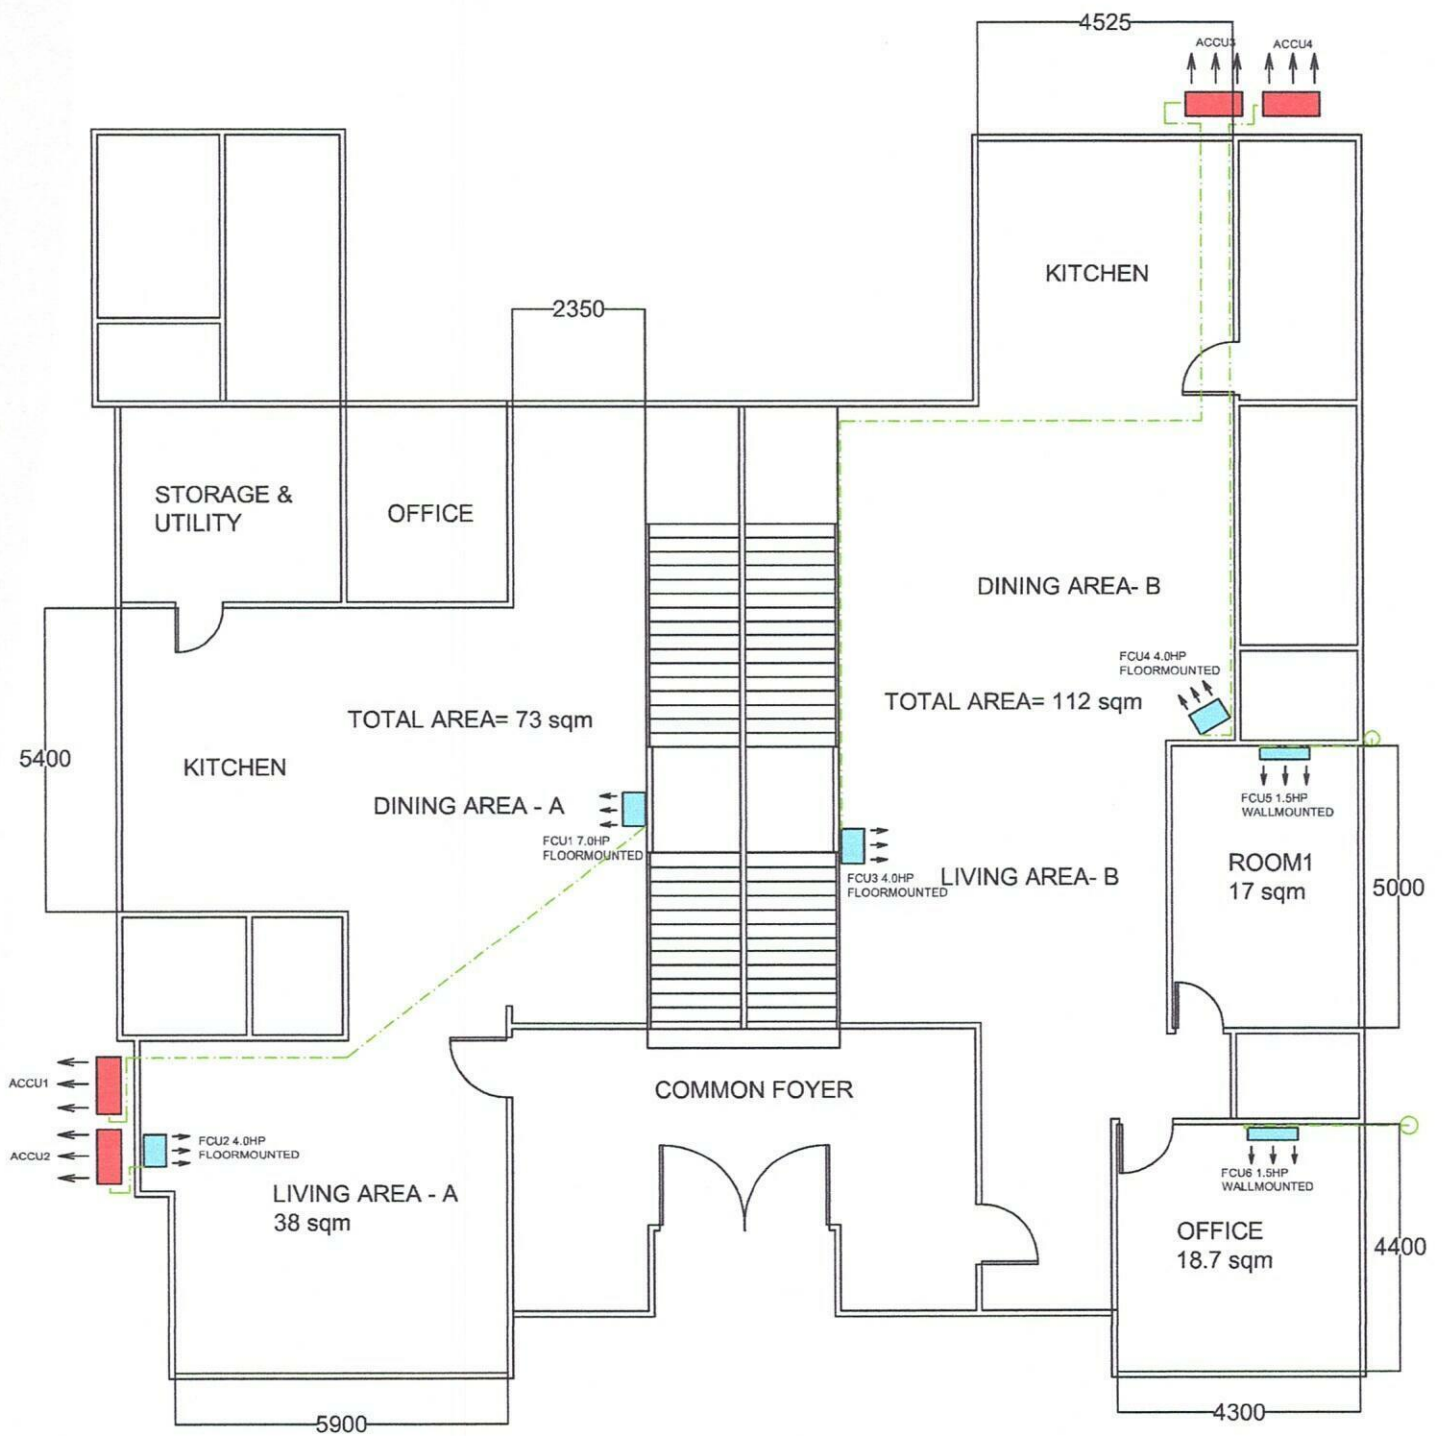

GROUND FLOOR

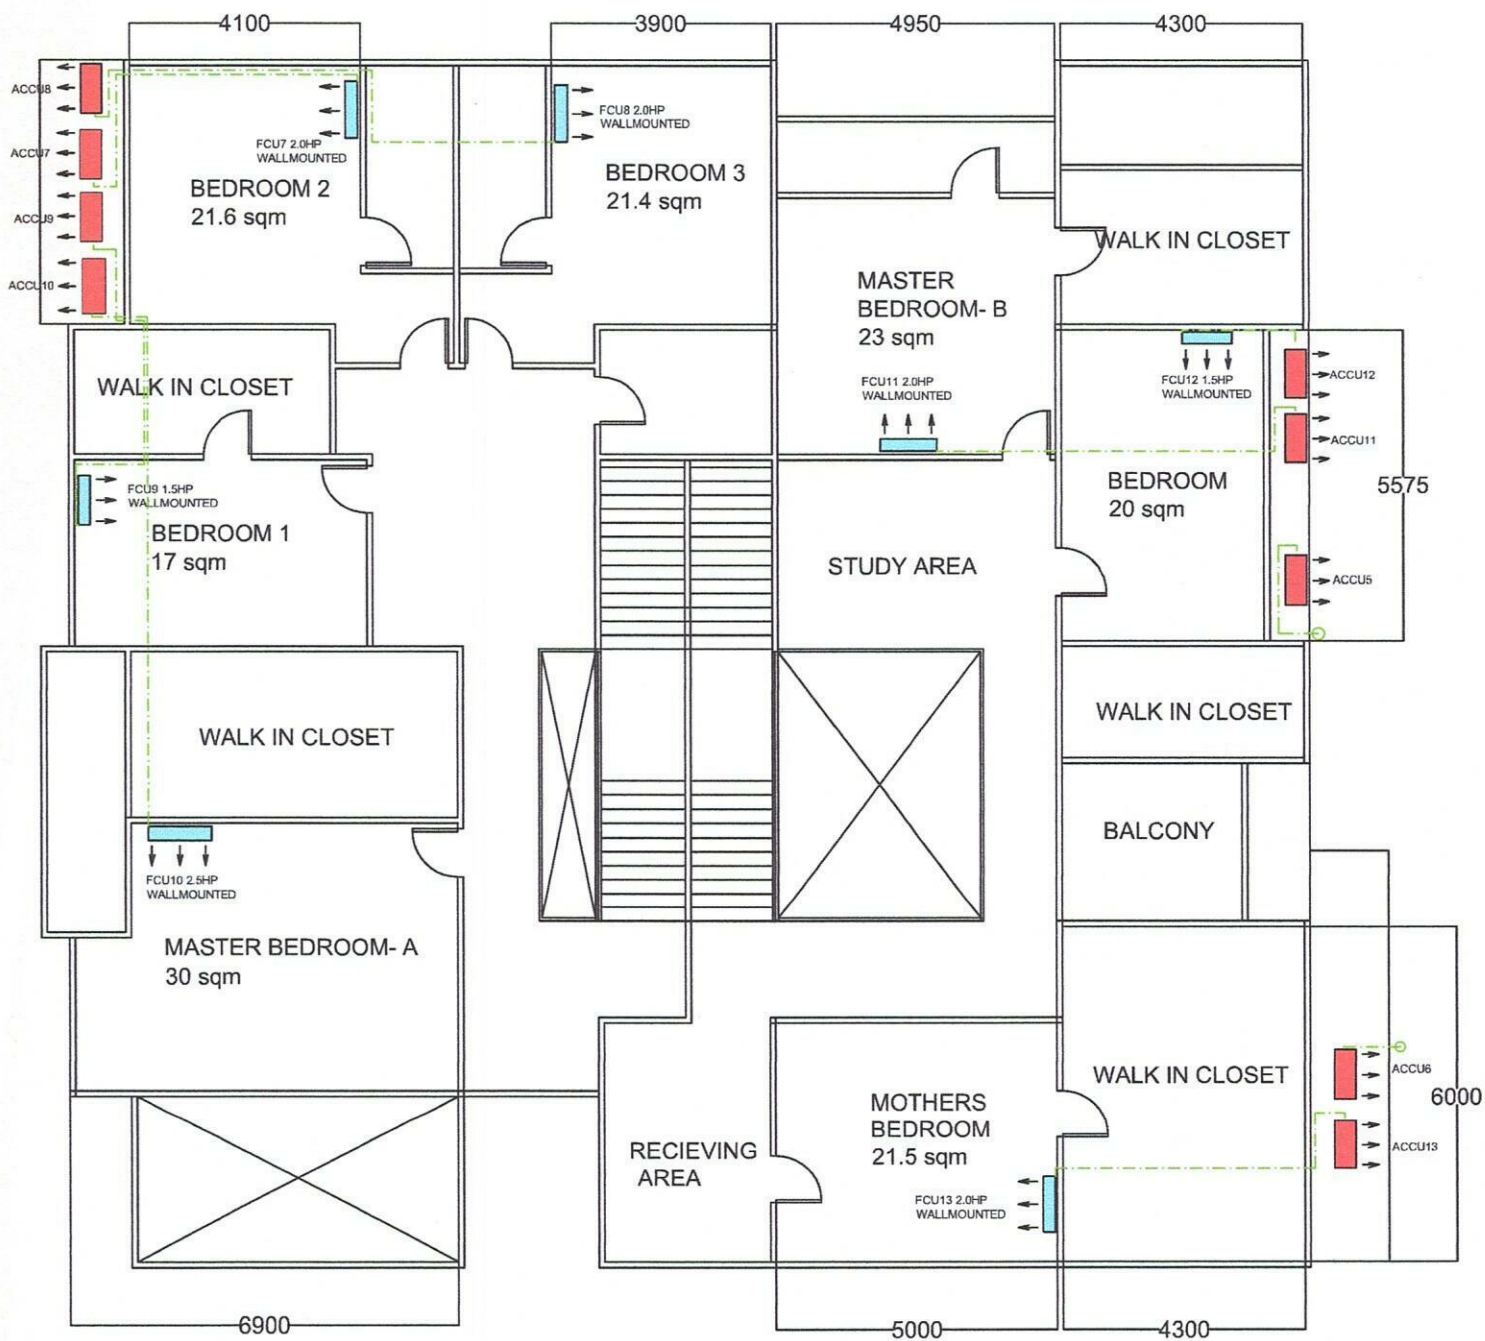

SECOND FLOOR