



October 14, 2024

JAP MODERN CONSTRUCTION OPC  
GROUND FLOOR, M PLACE MALL PANAY ONE, BRGY. SOUTH TRIANGLE QUEZON CITY  
TEL#: 0920-5188272

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	34,996.10	PHP	34,996.10
2	UNIT/S	MODEL: KLM-IS40-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 37,980 Kj/h (3.0TR) INVERTER R-32	119,995.00	93,596.10	PHP	187,192.20
TOTAL UNIT COST					PHP	222,188.30
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	148,000.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	370,788.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.  
FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

**\*\* INSTALLATION C/O ASP (cost will be based on actual)**


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at [kmi\\_asst@kolinphil.com.ph](mailto:kmi_asst@kolinphil.com.ph)

Very Truly Yours,

  
JANELLEN S. LIM  
KMI-ASSISTANT

Noted by:

  
MART NATHANIEL R. FLORES  
KMI-SUPERVISOR


Approved By:

  
MS. EDITHA M. FLORES  
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-10-24-0877  
ECY-22%/4K

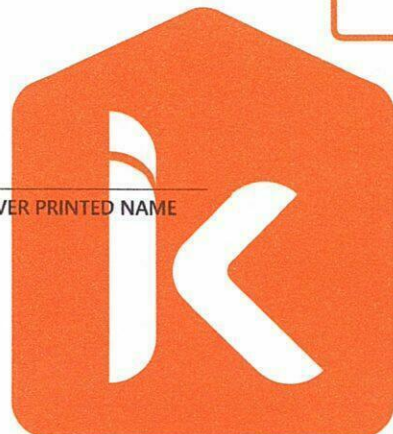

October 14, 2024  
JAP MODERN CONSTRUCTION OPC  
Ground Floor M Place Mall Panay One, Brgy South triangle Quezon City  
0920-5188272

MODEL	Qty
KSM-IW25-WCT10M1M32	1
KLM-IS40-AA1M32	2

STORE	Area	83 sqm
-------	------	--------

ACU 1	2.5HP Wallmounted Inverter	KSM-IW25-WCT10M1M32			
	Estimated Pipe Length = 76 ft				
	Estimated Royal Cord Length = 81 ft				
	<b>Initial Charge</b>				₱ 7,700.00
	Includes:				Less Outdoor bracket inclusion
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	<b>Installation Materials</b>	<b>Description</b>	<b>Qty</b>	<b>Price per qty</b>	<b>Subtotal</b>
	Copper Tube	1/4" x 1/2"	66 ft	₱ 400.00/ft	₱ 26,400.00
	Royal Cord (comm. wire)	2.mm2 x 4C	71 ft	₱ 100.00/ft	₱ 7,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3C	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	₱ 350.00/pc	₱ 2,450.00
	Full thread	3/8" x 10'	5 pc/s	₱ 150.00/pc	₱ 750.00
	Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
	Mobilization	nightshift	1 set	₱ 800.00/set	₱ 800.00
					₱ 40,000.00

<b>Estimated Charges</b>	₱ 47,700.00
--------------------------	-------------

ACU 2	4.0 HP Ceiling Cassette Inverter	KLM-IS40-AA1M32			
	Estimated Pipe Length = 63 ft				
	Estimated Royal Cord Length = 70 ft				
	<b>Initial Charge</b>				₱ 12,000.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	<b>Installation Materials</b>	<b>Description</b>	<b>Qty</b>	<b>Price per qty</b>	<b>Subtotal</b>
	Copper Tube	Ø 3/8 " x Ø 5/8"	53 ft	₱ 400.00/ft	₱ 21,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	60 ft	₱ 100.00/ft	₱ 6,000.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
	Circuit Breaker waterproof	40A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
	Full thread	3/8" x 10'	8 pc/s	₱ 150.00/pc	₱ 1,200.00
	Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
	Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
	Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
	Mobilization	nightshift	1 set	₱ 800.00/set	₱ 800.00
					₱ 39,900.00

<b>Estimated Charges</b>	₱ 51,900.00
--------------------------	-------------



**ACU 3 4.0 HP Ceiling Cassette Inverter****KLM-IS40-AA1M32**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 60 ft

**Initial Charge**

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord


Consumables

**Installation Materials**

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	43 ft	₱ 400.00/ft	₱ 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	50 ft	₱ 100.00/ft	₱ 5,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3C	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A/1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	8 pc/s	₱ 150.00/pc	₱ 1,200.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
Mobilization	nightshift	1 set	₱ 800.00/set	₱ 800.00
Scaffoldings	3sets	1 set	₱ 1,500.00/set	₱ 1,500.00
				₱ 36,400.00

**Estimated Charges**

₱ 48,400.00

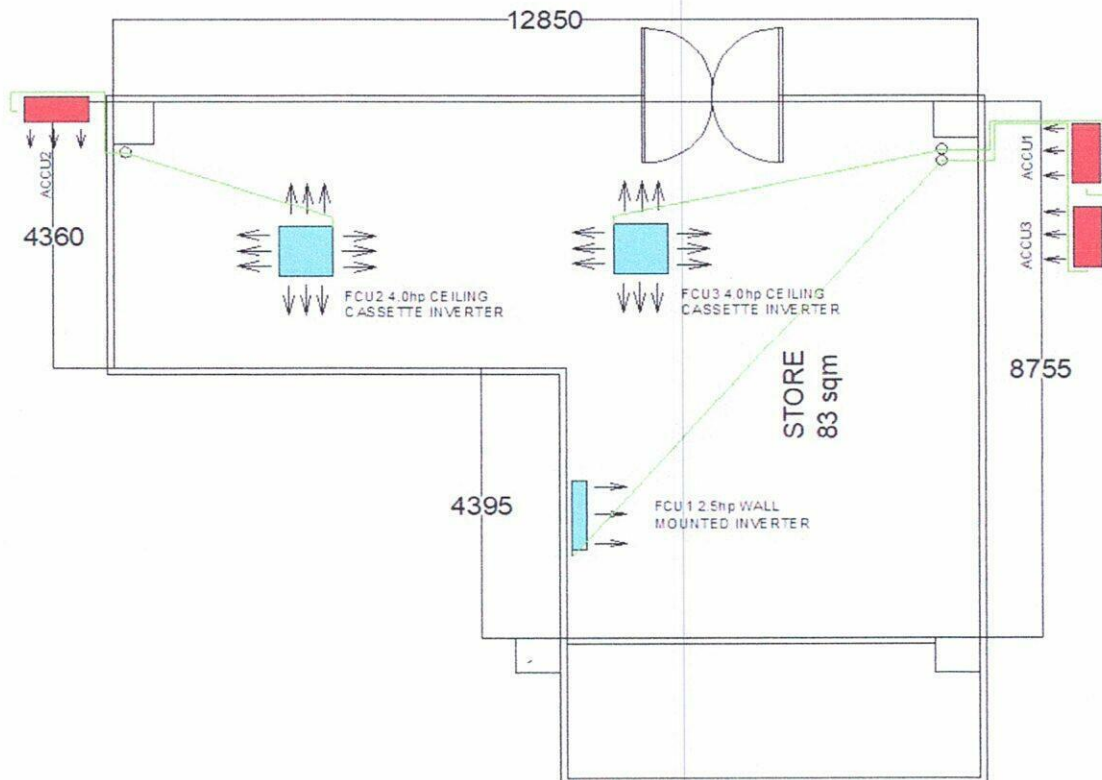


Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Installation notes:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Fabricate outdoor Bracket in shop bring to site and install.
- 4 For site visit with installer before installation of units.
- 5 Coppertube expose inside the area. Need to adjust lower atleast 4 inches of existing Outdoor Bracket.
- 6 Need to have a coring hole atleast 3inches diameter for lay out of coppertubes and wires.
- 7 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit. Nightshift noisy works
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 11 **Final charges will be based on actual installation.**


Prepared by:

  
**Jeffrey Dadios**  
Field Surveyor

Customer Conformance:

\_\_\_\_\_  
Signature Over Printed Name

Reviewed by:

  
**Engr. Kenneth Zamora**  
Service Supervisor Shop and  
Field Operation