



October 21, 2024

THE BUILDING BY TYF
146 D. TUAZON ST., BRGY. LOURDES, QUEZON CITY
TEL#: 0917-7098076

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
12	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	118,556.10	PHP	1,422,673.20
3	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	149,448.30
1	UNIT/S	MODEL: KSG-IWF-15WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	32,344.10	PHP	32,344.10
TOTAL UNIT COST					PHP	1,604,465.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	789,510.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	2,394,575.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

** INSTALLATION C/O ASP

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-10-24-0908
ECY-22%/4K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

OCTOBER 17, 2024
 THE BUILDING BY TYF
 146 D. Tuazon St. Brgy. Lourdes, Quezon City
 0917-7098076

MODEL	Qty
KLM-IC60-AA1M32	12
KSG-IWF-25Wfy8K1M32	3
KSG-IWF-15Wfy8K1M32	1

REV2

COVERED COURT	Area	611 sqm
----------------------	------	---------

ACU 1	7.0HP Floor Ceiling Inverter	KLM-IC60-AA1M32
	Estimated Pipe Length = 40 ft	
	Estimated Royal Cord Length = 47 ft	
	Initial Charge	₱ 14,000.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
	Installation Materials	
	Description	Qty Price per qty Subtotal
	Copper Tube	3/8" x 5/8" 30 ft ₱ 600.00/ft ₱ 18,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C 37 ft ₱ 100.00/ft ₱ 3,700.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c 7 ft ₱ 70.00/ft ₱ 490.00
	Circuit Breaker waterproof	60A/1ph 1 pc/s ₱ 1,000.00/pc ₱ 1,000.00
	Pipe Hanger	fabricated 2 pc/s ₱ 300.00/pc ₱ 600.00
	Outdoor bracket	Fabricated floor 1 pc/s ₱ 2,500.00/pc ₱ 2,500.00
	PVC blue	1" x 10' 2 pc/s ₱ 200.00/pc ₱ 400.00
	Full thread	3/8" x 10' 2 pc/s ₱ 150.00/pc ₱ 300.00
	Drain Hose	White -1/2" 5 ft ₱ 25.00/ft ₱ 125.00
		₱ 27,115.00

Estimated Charges	₱ 41,115.00
--------------------------	-------------

ACU 2	7.0HP Floor Ceiling Inverter	KLM-IC60-AA1M32
	Estimated Pipe Length = 53 ft	
	Estimated Royal Cord Length = 60 ft	
	Initial Charge	₱ 14,000.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
	Installation Materials	
	Description	Qty Price per qty Subtotal
	Copper Tube	3/8" x 5/8" 43 ft ₱ 600.00/ft ₱ 25,800.00
	Royal Cord (comm. wire)	2.mm2 x 4C 50 ft ₱ 100.00/ft ₱ 5,000.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c 7 ft ₱ 70.00/ft ₱ 490.00
	Circuit Breaker waterproof	60A/1ph 1 pc/s ₱ 1,000.00/pc ₱ 1,000.00
	Outdoor bracket	Fabricated floor 1 pc/s ₱ 2,500.00/pc ₱ 2,500.00
	PVC blue	1" x 10' 2 pc/s ₱ 200.00/pc ₱ 400.00
	Full thread	3/8" x 10' 2 pc/s ₱ 150.00/pc ₱ 300.00
	Drain Hose	White -1/2" 5 ft ₱ 25.00/ft ₱ 125.00
		₱ 35,615.00

Estimated Charges	₱ 49,615.00
--------------------------	-------------

ACU 3 7.0HP Floor Ceiling Inverter**KLM-IC60-AA1M32**

Estimated Pipe Length = 66 ft

Estimated Royal Cord Length = 73 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	56 ft	P 600.00/ft	P 33,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	63 ft	P 100.00/ft	P 6,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	4 pc/s	P 300.00/pc	P 1,200.00
Outdoor bracket	Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 45,915.00

Estimated Charges**P 59,915.00****ACU 4 7.0HP Floor Ceiling Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 76 ft

Estimated Royal Cord Length = 83 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	66 ft	P 600.00/ft	P 39,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	73 ft	P 100.00/ft	P 7,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	4 pc/s	P 300.00/pc	P 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 55,415.00

Estimated Charges**P 69,415.00****ACU 5 7.0HP Floor Ceiling Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 66 ft

Estimated Royal Cord Length = 73 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	56 ft	P 600.00/ft	P 33,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	63 ft	P 100.00/ft	P 6,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	8 pc/s	P 300.00/pc	P 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 49,615.00

Estimated Charges**P 63,615.00**

ACU 6 7.0HP Floor Ceiling Inverter**KLM-IC60-AA1M32**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 60 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	43 ft	P 600.00/ft	P 25,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	50 ft	P 100.00/ft	P 5,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	8 pc/s	P 300.00/pc	P 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 40,515.00**Estimated Charges****P 54,515.00****ACU 7 7.0HP Floor Ceiling Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 53 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	36 ft	P 600.00/ft	P 21,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	43 ft	P 100.00/ft	P 4,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	6 pc/s	P 300.00/pc	P 1,800.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 35,015.00**Estimated Charges****P 49,015.00****ACU 8 7.0HP Floor Ceiling Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 55 ft

Estimated Royal Cord Length = 62 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	45 ft	P 600.00/ft	P 27,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	52 ft	P 100.00/ft	P 5,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	8 pc/s	P 300.00/pc	P 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00

P 41,915.00**Estimated Charges****P 55,915.00****ACU 9 7.0HP Floor Ceiling Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 69 ft

Estimated Royal Cord Length = 76 ft

Initial Charge

₱ 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	59 ft	₱ 600.00/ft	₱ 35,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	66 ft	₱ 100.00/ft	₱ 6,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	10 pc/s	₱ 300.00/pc	₱ 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 52,315.00

Estimated Charges

₱ 66,315.00

ACU 10 7.0HP Floor Ceiling Inverter

KLM-IC60-AA1M32

Estimated Pipe Length = 76 ft

Estimated Royal Cord Length = 83 ft

Initial Charge

₱ 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	66 ft	₱ 600.00/ft	₱ 39,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	73 ft	₱ 100.00/ft	₱ 7,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	10 pc/s	₱ 300.00/pc	₱ 3,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 52,215.00

Estimated Charges

₱ 66,215.00

ACU 11 7.0HP Floor Ceiling Inverter

KLM-IC60-AA1M32

Estimated Pipe Length = 69 ft

Estimated Royal Cord Length = 76 ft

Initial Charge

₱ 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	59 ft	₱ 600.00/ft	₱ 35,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	66 ft	₱ 100.00/ft	₱ 6,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	10 pc/s	₱ 300.00/pc	₱ 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 52,315.00

Estimated Charges

₱ 66,315.00

ACU 12 7.0HP Floor Ceiling Inverter

KLM-IC60-AA1M32

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge

₱ 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	3/8" x 5/8"	40 ft	P 600.00/ft	P 24,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	47 ft	P 100.00/ft	P 4,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
Full thread	3/8" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 34,015.00

Estimated Charges	P 48,015.00
--------------------------	--------------------

GYM	Area	90 sqm
------------	-------------	---------------

ACU 13 1.5 HP Wall Mounted Inverter KSG-IWF-15Wfy8K1M32

Estimated Pipe Length = 20 ft
Estimated Royal Cord Length = 27 ft

Initial Charge **P 4,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket (Floor)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	10 ft	P 350.00/ft	P 3,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	17 ft	P 100.00/ft	P 1,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	40A / 3Ph	1 pc/s	P 2,100.00/pc	P 2,100.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
Drain Hose	White -1/2"	5 ft	P 25.00/ft	P 125.00
				P 13,245.00

Estimated Charges	P 17,745.00
--------------------------	--------------------

ACU 14 2.5 HP Wall Mounted Inverter KSG-IWF-25Wfy8K1M32

Estimated Pipe Length = 40 ft
Estimated Royal Cord Length = 47 ft

Initial Charge **P 5,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket (Floor)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	37 ft	P 100.00/ft	P 3,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 17,595.00

Estimated Charges	P 23,095.00
--------------------------	--------------------

ACU 15 2.5 HP Wall Mounted Inverter**KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 53 ft

Initial Charge**P 5,500.00****Includes:**

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube Ø 1/4" x Ø 5/8"	36 ft	P 400.00/ft	P 14,400.00
Royal Cord (comm. wire) 2.mm2 x 4C	43 ft	P 100.00/ft	P 4,300.00
Royal Cord (ACCU-Breaker) 3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof 30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue 3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
Drain Hose White -1/2"	7 ft	P 25.00/ft	P 175.00
			P 20,595.00

Estimated Charges**P 26,095.00****ACU 16 2.5 HP Wall Mounted Inverter****KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 56 ft

Estimated Royal Cord Length = 63 ft

Initial Charge**P 5,500.00****Includes:**

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube Ø 1/4" x Ø 5/8"	46 ft	P 400.00/ft	P 18,400.00
Royal Cord (comm. wire) 2.mm2 x 4C	53 ft	P 100.00/ft	P 5,300.00
Royal Cord (ACCU-Breaker) 3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof 30A/1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue 3/4" x 10'	2 pc/s	P 150.00/pc	P 300.00
Scaffolding 4sets	1 pc/s	P 1,500.00/pc	P 1,500.00
Drain Hose White -1/2"	7 ft	P 25.00/ft	P 175.00
			P 27,095.00

Estimated Charges**P 32,595.00****Total Estimated Charges****P 789,510.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Customer Provide a catwalk atleast 1meter or more from the wall of area.Expose coppertube and drainline.
- 4 Need for site visit and marking for the final location of units,coppertube, drainline and outdoor location.
- 5 Customer need to provide a screen or cover of aircon in the indoor unit to prevent the possible damage from hard object (example: ball)
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformee:

Jeoffrey Dadios

Field Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth ZamoraService Supervisor Shop and
Field Operation

October 18, 2024
THE BUILDING BY TYF
146 D. Tuazon St. Brgy. Lourdes, Quezon City
0917-7098076

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
Multipurpose Area	611 sqm	KLM-IC60-AA1M32 (14 units)	KLM-IC60-AA1M32 (12 units)	Calculated by 69.2 TR, undersize by 9.2TR

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-5year).**

For your guidance and information

Prepared by:

Name
Surveyor

Approved by:

Mr. Alvin de Rivera
Service Manager


Oct.18,2024

Noted by:

Engr. Kenneth Zamora
Service Supervisor - Field
and Shop Operation

Customer Conformer:

Signature Over Printed Name

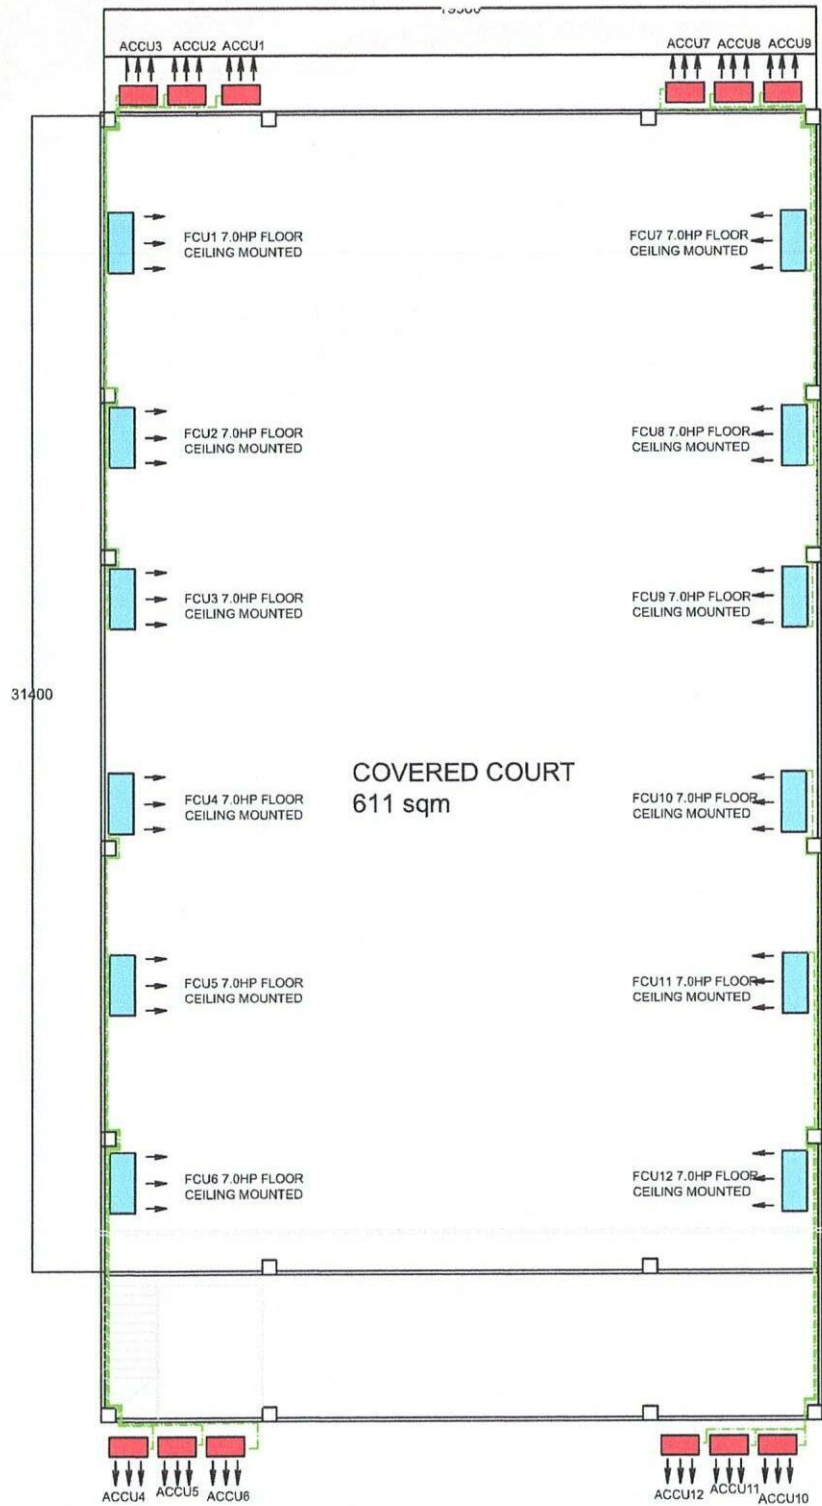

MEZZANINE

