



October 7, 2024

THE BUILDING BY TYF
146 D. TUAZON ST., BRGY. LOURDES, QUEZON CITY
TEL#: 0917-7098076

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
10	UNIT/S	MODEL: KLM-SF70-4F1M410 KOLIN FLOOR MOUNTED AIRCONDITIONER 56,970 Kj/h (5.0TR) NON-INVERTER R-410A SINGLE PHASE	110,995.00	83,576.10	PHP	835,761.00 /
3	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	149,448.30 /
1	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	32,344.10	PHP	32,344.10
TOTAL UNIT COST					PHP	1,017,553.40 /
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	672,900.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,691,053.40 /

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

**** INSTALLATION C/O ASP**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLE S. LIM
KMI-ASSISTANT

Noted by;


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME


KMI-QUOTE-10-24-0855
ECY-22%/3K/4K


Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

 www.kolinphil.com.ph / kolinphilippines

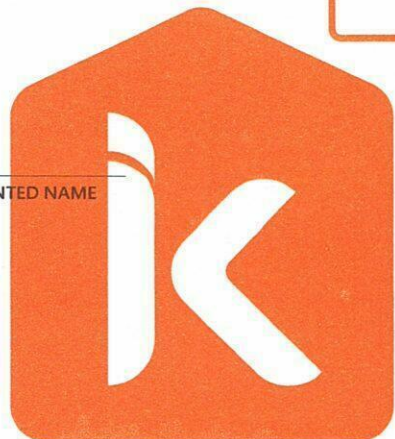

October 7, 2024
 THE BUILDING BY TYF
 146 D. Tuazon St. Brgy. Lourdes, Quezon City
 0917-7098076

MODEL	Qty
KLM-SF70-4F1M410	10
KSG-IWF-25Wfy8K1M32	3
KSG-IWF-15Wfy8K1M32	1

REV2

COVERED COURT		Area	611 sqm
---------------	--	------	---------

ACU 1	7.0HP Floor Standing Regular	KLM-SF70-4F1M410	
	Estimated Pipe Length = 23 ft		
	Estimated Royal Cord Length = 30 ft		
	Initial Charge		P 14,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	13 ft	P 600.00/ft	P 7,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	P 100.00/ft	P 2,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	2 pc/s	P 300.00/pc	P 600.00
Outdoor bracket	Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 14,790.00

Estimated Charges	P 28,790.00
--------------------------	-------------

ACU 2	7.0HP Floor Standing Regular	KLM-SF70-4F1M410	
	Estimated Pipe Length = 46 ft		
	Estimated Royal Cord Length = 53 ft		
	Initial Charge		P 14,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	36 ft	P 600.00/ft	P 21,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	43 ft	P 100.00/ft	P 4,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated floor	1 pc/s	P 2,500.00/pc	P 2,500.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 30,290.00

Estimated Charges	P 44,290.00
--------------------------	-------------

ACU 3 7.0HP Floor Standing Regular**KLM-SF70-4F1M410**

Estimated Pipe Length = 92 ft
Estimated Royal Cord Length = 99 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	82 ft	₱ 600.00/ft	₱ 49,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	89 ft	₱ 100.00/ft	₱ 8,900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	4 pc/s	₱ 300.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 66,190.00

Estimated Charges**₱ 80,190.00****ACU 4 7.0HP Floor Standing Regular****KLM-SF70-4F1M410**

Estimated Pipe Length = 73 ft
Estimated Royal Cord Length = 80 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	63 ft	₱ 600.00/ft	₱ 37,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	70 ft	₱ 100.00/ft	₱ 7,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	4 pc/s	₱ 300.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 52,890.00

Estimated Charges**₱ 66,890.00****ACU 5 7.0HP Floor Standing Regular****KLM-SF70-4F1M410**

Estimated Pipe Length = 60 ft
Estimated Royal Cord Length = 67 ft

Initial Charge**₱ 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	50 ft	₱ 600.00/ft	₱ 30,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	57 ft	₱ 100.00/ft	₱ 5,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Pipe Hanger	fabricated	8 pc/s	₱ 300.00/pc	₱ 2,400.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 44,990.00

Estimated Charges**₱ 58,990.00**

ACU 6 7.0HP Floor Standing Regular**KLM-SF70-4F1M410**

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	23 ft	P 600.00/ft	P 13,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	P 100.00/ft	P 3,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 24,890.00

Estimated Charges**P 38,890.00****ACU 7 7.0HP Floor Standing Regular****KLM-SF70-4F1M410**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 60 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	43 ft	P 600.00/ft	P 25,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	50 ft	P 100.00/ft	P 5,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Metal Clamp	3"	10 pc/s	P 120.00/pc	P 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 38,890.00

Estimated Charges**P 52,890.00****ACU 8 7.0HP Floor Standing Regular****KLM-SF70-4F1M410**

Estimated Pipe Length = 92 ft

Estimated Royal Cord Length = 99 ft

Initial Charge**P 14,000.00**

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	82 ft	P 600.00/ft	P 49,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	89 ft	P 100.00/ft	P 8,900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s	P 300.00/pc	P 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s	P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 67,990.00

Estimated Charges**P 81,990.00**

ACU 9 7.0HP Floor Standing Regular**KLM-SF70-4F1M410**

Estimated Pipe Length = 72 ft

Estimated Royal Cord Length = 79 ft

Initial Charge

P 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	62 ft P 600.00/ft	P 37,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	69 ft P 100.00/ft	P 6,900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Pipe Hanger	fabricated	10 pc/s P 300.00/pc	P 3,000.00
Outdoor bracket	Fabricated wall	1 pc/s P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s P 200.00/pc	P 400.00
			P 53,990.00

Estimated Charges**P 67,990.00****ACU 10 7.0HP Floor Standing Regular****KLM-SF70-4F1M410**

Estimated Pipe Length = 60 ft

Estimated Royal Cord Length = 67 ft

Initial Charge

P 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 3/4"	50 ft P 600.00/ft	P 30,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	57 ft P 100.00/ft	P 5,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft P 70.00/ft	P 490.00
Circuit Breaker waterproof	60A/1ph	1 pc/s P 1,000.00/pc	P 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s P 200.00/pc	P 400.00
			P 42,590.00

Estimated Charges**P 56,590.00****GYM**

Area

90 sqm

ACU 11 1.5 HP Wall Mounted Inverter**KSG-IWF-15WFY8K1M32**

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length = 25 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	10 ft P 350.00/ft	P 3,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft P 100.00/ft	P 1,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft P 60.00/ft	P 300.00
Circuit Breaker waterproof	40A / 3Ph	1 pc/s P 2,100.00/pc	P 2,100.00
Outdoor bracket	Fabricated wall	1 pc/s P 5,000.00/pc	P 5,000.00
PVC blue	1" x 10'	2 pc/s P 200.00/pc	P 400.00
			P 12,800.00

Estimated Charges**P 17,300.00**

ACU 12 3.0 HP Wall Mounted Inverter**KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	P 400.00/ft	P 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A/1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 17,200.00

Estimated Charges**P 21,700.00****ACU 13 3.0 HP Wall Mounted Inverter****KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 51 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket(floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	36 ft	P 400.00/ft	P 14,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	P 100.00/ft	P 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A/ 1ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 20,200.00

Estimated Charges**P 25,700.00****ACU 14 3.0 HP Wall Mounted Inverter****KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 56 ft

Estimated Royal Cord Length = 61 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	46 ft	P 400.00/ft	P 18,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	51 ft	P 100.00/ft	P 5,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	30A/1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1" x 10'	2 pc/s	P 200.00/pc	P 400.00
				P 25,200.00


Estimated Charges**P 30,700.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Floor mounted indoor unit at multipurpose area will be placed on the catwalk with railing above the beam. Customer will provide catwalk with railing atleast 1meter or more from the wall of area.
- 4 Recommended for multipurpose area are 14 units of 5TR air conditioning unit capacity, but customer initially wants 10 units 5TR.
- 5 Expose coppertube and drainline lay out.
- 6 Need for site visit and marking for the final location of units, coppertube, drainline and outdoor location.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:



Jeffrey Dadios
Field Surveyor

Customer Conformer:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation

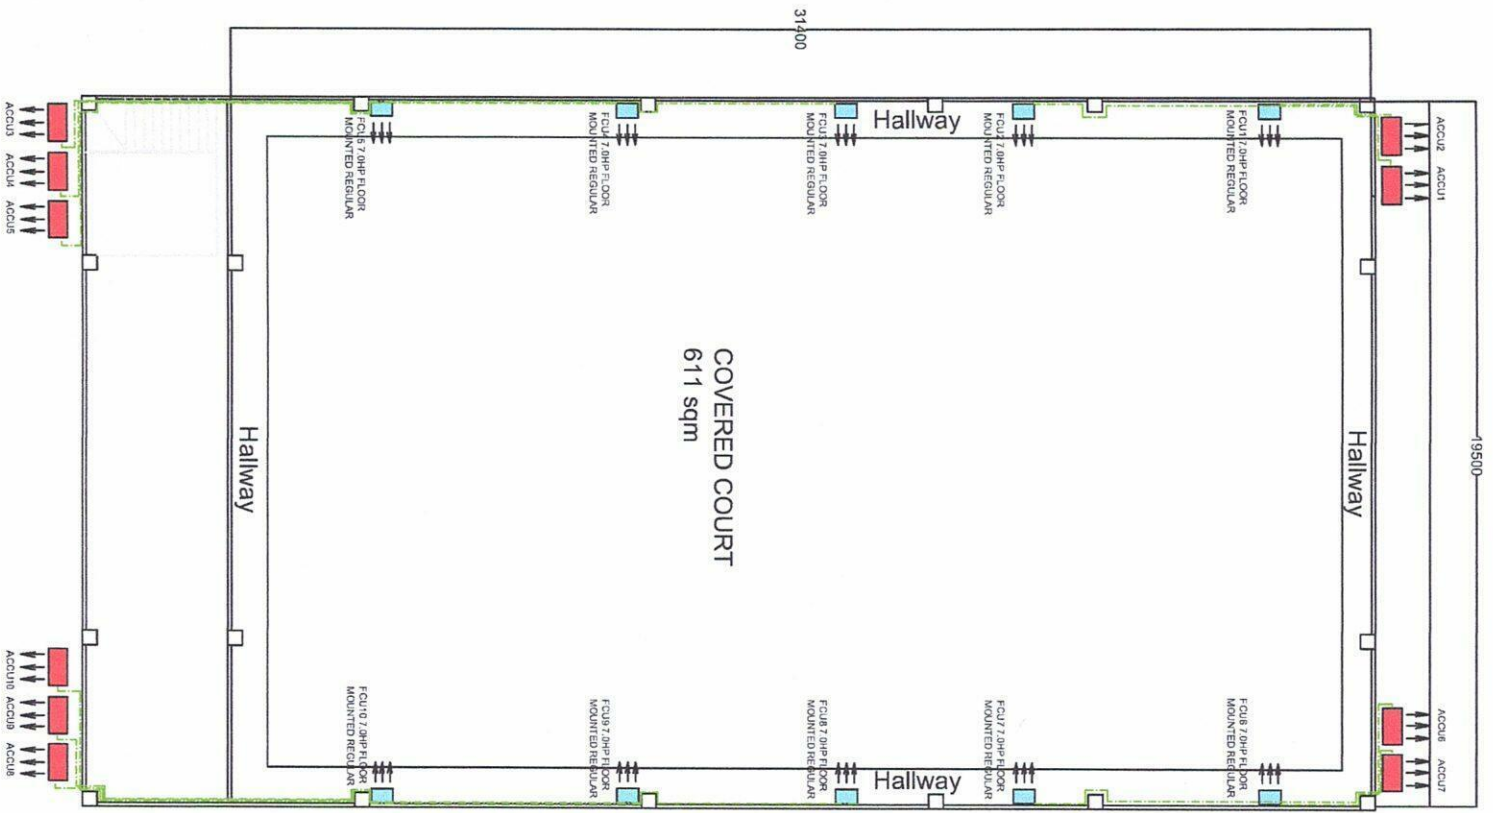

MEZZANINE

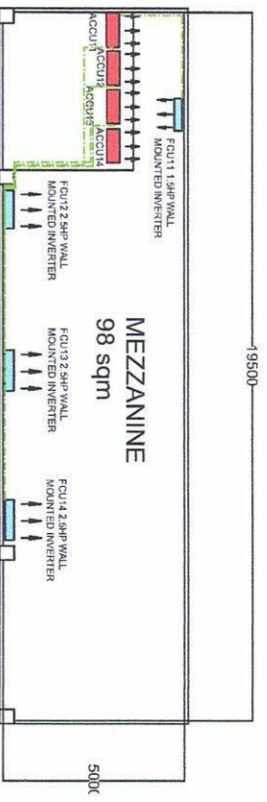

October 7, 2024
THE BUILDING BY TYF
146 D. Tuazon St. Brgy. Lourdes, Quezon City
0917-7098076

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
Multipurpose Area	611 sqm	KLM-SF70-4F1M410 (14 units)	KLM-SF70-4F1M410 (10 units)	Computed capacity is 69.2 TR, undersize by 19.2 TR

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-VOID wty).**

For your guidance and information

Prepared by:

Name
Surveyor

Approved by:

Mr. Alvin de Rivera
Service Manager

Oct.8,2024

Noted by:

Engr. Kenneth Zamora
Service Supervisor - Field
and Shop Operation

Customer Conforme:

Signature Over Printed Name