



September 17, 2024

MR. DAVIDSON DELA CRUZ
48 APO ST., BETWEEN N. ROXAS AND DAPITAN ST., QC
TEL#: 0919-0875171

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLG-IF70-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 61,200 Kj/h (5.0TR) FULL DC INVERTER R-32 SINGLE PHASE	173,995.00	127,716.10	PHP	127,716.10
TOTAL UNIT COST					PHP	127,716.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	21,365.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	149,681.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL B. FLORES
KMI-SUPERVISOR


Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-09-24-0808
ECY-22%/8K

Conforme:

SIGNATURE OVER PRINTED NAME

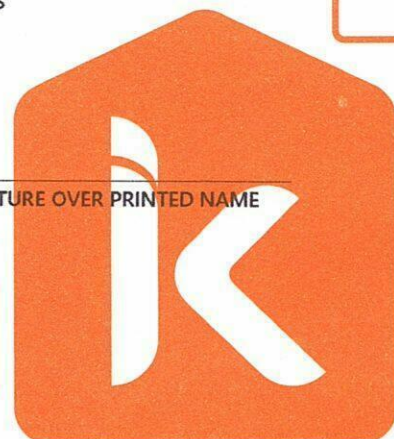

KOLIN Philippines International Inc.
Survey Form

No 003535

Customer Name : DAVIDSON DE LA CRUZ Date : 9-14-24
Address : 48 XPO ST. BAY. SHERIDAN CITY SJR No. : 27238
Establishment Type : Residential ☒ Area Surveyed : LIVING/DINING/KITCHEN
Commercial ☐ Area Surveyed : _____
Recommended Product Model : KL6-1F30-561M32

Cooling Capacity Computation

Floor Area : 51.1 sqm.
Ceiling Height : 3.1 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>51.1</u>	x	550 Btu/h	<u>28105</u>	Btu/h
Ceiling Height (excess of 3 mtrs.):	<u>31</u>	x	20%	<u>5621</u>	Btu/h
Window Direct Sunlight		x	20% - 50%	<u>5621</u>	Btu/h
Total Cooling Capacity				<u>39347</u>	Btu/h

Add : Additional Heat Load

No. of Person	<u>6</u>	x	300 Btu/h	<u>1800</u>	Btu/h
No. of Ordinary Light (<40w)	<u>15</u>	x	200 Btu/h	<u>3000</u>	Btu/h
No. of Special Light (>40w)		x	400 Btu/h		Btu/h
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h		Btu/h
No. of Refrigerator (> 6 cu.ft.)	<u>1</u>	x	800 Btu/h	<u>800</u>	Btu/h
No. of Cooking Range	<u>1</u>	x	1500 Btu/h		Btu/h
No. of Laptop Computer		x	150 Btu/h		Btu/h
No. of Desktop Computer	<u>1</u>	x	400 Btu/h	<u>400</u>	Btu/h
No. of Printer / WATER DESPENSE	<u>1</u>	x	500 Btu/h	<u>500</u>	Btu/h
No. of Photocopier / MICROWAVE	<u>1</u>	x	1000 Btu/h	<u>1000</u>	Btu/h
Total Cooling Capacity				<u>7200</u>	Btu/h

Recommended Cooling Capacity

46847 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | ☒ Expose | ☐ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☐ Yes ☐ Shop | ☒ Site ☐ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern;

EXPPOSE CONNECTION IN THE AREA.
WITH EXPOSED OUT DOOR SPLIT UNIT ON SITE.
OUTDOOR HGT. 1 METER FROM GROUND.

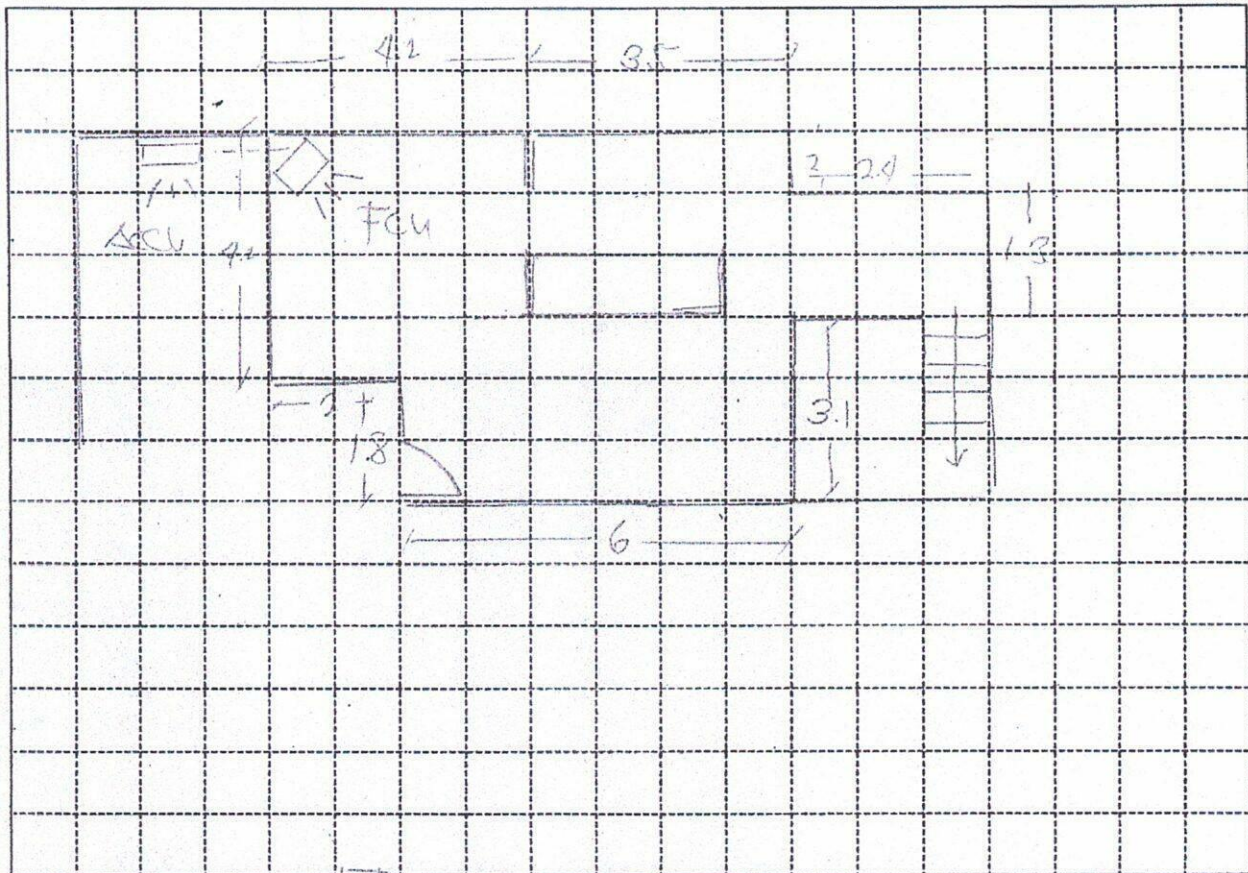

Indoor Unit Location :

CORNER 45 DEGREE TO CENTER

Outdoor Unit Location :

AT THE GARDEN CENTER OF WALL OUTDOOR 12/12 1/2" / 12/12"

Pipe Length :

10 FT / 3 METERS

Special Note :

FRESH FLOOR /
GROUND

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620			
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	7FT	100	700
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	2FT	70	140
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd. / Fabricated) : (Floor / Wall)	1	5000	5000
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2", 3/4"			
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Hose WHITE 1/2"	7FT	20	140
Chipping Works mtr.			
Dismantling Fee (existing air-conditioner)			
Initial Charge			14000
TOTAL ESTIMATE		P 21,365 -	

Note :

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
2. Survey fee will be deducted in the installation fee.

Prepared by:

Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name