



September 20, 2024

ATTY. PETER SUCHIANGCO
119 AQUARIUS ST., CINCO HERMANOS, MARIKINA CITY
TEL #: 0966-624999 / 0922-814271
Email: rdmtech.88@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32	117,995.00	92,036.10	PHP	184,072.20
2	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	55,744.10	PHP	111,488.20
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	49,816.10	PHP	49,816.10
2	UNIT/S	MODEL: KSG-IWF-10WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	29,224.10	PHP	58,448.20
1	UNIT/S	MODEL: KAG-250WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 24,120 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x31.5"x17"	48,695.00	36,182.10	PHP	36,182.10
TOTAL UNIT COST					PHP	440,006.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	284,425.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	724,431.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE (3) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.

** INSTALLATION C/O ASC

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

KMI-QUOTE-09-24-0823
REG-22%/4K/1.8K

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



HALLWAY	Area	29 sqm
----------------	------	--------

ACU 3	3.0 HP Wall Mounted Inverter	KSM-IW29AE-5G1M (OLD UNIT)				
	Estimated Pipe Length	=	50	ft		
	Estimated Royal Cord Length	=	55	ft		
	Initial Charge					₱ 4,000.00
	Includes:					Installation
	Labor					old unit
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 1/4" x Ø 5/8"	50 ft	₱ 350.00/ft	₱ 17,500.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	55 ft	₱ 100.00/ft	₱ 5,500.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00	
	Dismantle	2.5HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00	
	PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	
	Outdoor Bracket	Galvanise-large	1 pc/s	₱ 1,650.00/pc	₱ 1,650.00	₱ 30,700.00

Estimated Charges	₱ 34,700.00
--------------------------	-------------

MASTER BEDROOM	Area	24 sqm
-----------------------	------	--------

ACU 4	2.5 HP Wall Mounted Inverter	KSG-IWF-25WFY8K1M32				
	Estimated Pipe Length	=	40	ft		
	Estimated Royal Cord Length	=	45	ft		
	Initial Charge					₱ 5,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (Wall)					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 1/4" x Ø 5/8"	30 ft	₱ 350.00/ft	₱ 10,500.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	35 ft	₱ 100.00/ft	₱ 3,500.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00	
	PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	₱ 16,850.00

Estimated Charges	₱ 22,350.00
--------------------------	-------------

3.0 HP Wall Mounted Regular

FAMILY ROOM	Area	25 sqm
--------------------	------	--------

ACU 5	3.0 HP Wall Mounted Regular	KSG-30B1M- OLD UNITS				
	Estimated Pipe Length	=	40	ft		
	Estimated Royal Cord Length	=	45	ft		
	Initial Charge					₱ 4,000.00
	Includes:					Installation
	Labor					old unit
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	3/8" X 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3C	5 ft	₱ 60.00/ft	₱ 300.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	
	Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	₱ 350.00/pc	₱ 1,050.00	
	Outdoor Bracket	Galvanise-large	1 pc/s	₱ 1,650.00/pc	₱ 1,650.00	₱ 24,800.00

Estimated Charges	₱ 28,800.00
--------------------------	-------------

WALK IN CLOSET

Area 10 sqm

ACU 6 1.0 HP Wall Mounted Inverter**KSG-IWF-10Wfy8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 45 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	30 ft	P 350.00/ft	P 10,500.00
Royal Cord (comm. wire)	35 ft	P 100.00/ft	P 3,500.00
Royal Cord (ACCU-Breaker)	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	4 pc/s	P 350.00/pc	P 1,400.00
PVC blue	2 pc/s	P 150.00/pc	P 300.00
			P 17,000.00

Estimated Charges**P 21,500.00****T & B**

Area 10 sqm

ACU 7 1.0 HP Wall Mounted Inverter**KSG-IWF-10Wfy8K1M32**

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge

P 4,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	27 ft	P 350.00/ft	P 9,450.00
Royal Cord (comm. wire)	32 ft	P 100.00/ft	P 3,200.00
Royal Cord (ACCU-Breaker)	5 ft	P 60.00/ft	P 300.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	3 pc/s	P 350.00/pc	P 1,050.00
PVC blue	2 pc/s	P 150.00/pc	P 300.00
			P 15,300.00

Estimated Charges**P 19,800.00****HALLWAY 2ND FLOOR**

Area 23 sqm

ACU 8 3.0 HP Wall Mounted Inverter**KSM-IW30-4F1M (OLD UNIT)**

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 28 ft

Initial Charge

P 5,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)	30 ft	P 100.00/ft	P 3,000.00
Royal Cord (ACCU-Breaker)	5 ft	P 60.00/ft	P 300.00
Rubber Insulation	2 pc/s	P 350.00/pc	P 700.00
Circuit Breaker waterproof	1 pc/s	P 1,000.00/pc	P 1,000.00
PVC blue	1 pc/s	P 150.00/pc	P 150.00
			P 13,200.00

Estimated Charges**P 18,700.00**

BEDROOM 1	Area	20 sqm
------------------	------	--------

ACU 9 2.0 HP Wall Mounted Inverter

KSM-IW20-4F1M (OLD UNIT)

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length = 25 ft

Initial Charge

Includes:

Labor

Consumables

₱ 4,000.00

Installation of old unit

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	20 ft	₱ 350.00/ft	₱ 7,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	₱ 100.00/ft	₱ 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Outdoor Bracket	Galvanise-large	1 pc/s	₱ 1,650.00/pc	₱ 1,650.00
Dismantle(OUTDOOR ONLY)	2.0HP Wall Mounted	1 set	₱ 1,250.00/set	₱ 1,250.00
				₱ 13,850.00

Estimated Charges	₱ 17,850.00
--------------------------	-------------

OFFICE/LIBRARY	Area	27 sqm
-----------------------	------	--------

ACU 10 2.5 HP Window type Inverter

KAG-250WCINV

Initial Charge

Includes:

Labor

Consumables

₱ 1,200.00

Installation Materials	Description	Qty	Price per qty	Subtotal
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 175.00

Estimated Charges	₱ 1,375.00
--------------------------	------------

ENTERTAINMENT ROOM	Area	63 sqm
---------------------------	------	--------

ACU 11 4.0 HP Ceiling Suspended Inverter

KLM-IC40-AA1M32

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length = 32 ft

Initial Charge

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

₱ 12,000.00

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	17 ft	₱ 400.00/ft	₱ 6,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/1PH	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	₱ 350.00/pc	₱ 350.00
Indoor bracket	Fabricated floor	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fab. wall w/ledge	1 pc/s	₱ 6,500.00/pc	₱ 6,500.00
Dismantle	4.0HP Floor Standing	1 set	₱ 3,000.00/set	₱ 3,000.00
PVC blue	3/4" x 10'	3 pc/s	₱ 150.00/pc	₱ 450.00
				₱ 22,150.00

Estimated Charges	₱ 34,150.00
--------------------------	-------------

ACU 12 4.0 HP Ceiling Suspended Inverter**KLM-IC40-AA1M32**

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 35 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	20 ft	P 350.00/ft	P 7,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	P 100.00/ft	P 2,500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	P 70.00/ft	P 350.00
Circuit Breaker waterproof	40A/1PH	1 pc/s	P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc/s	P 350.00/pc	P 350.00
Outdoor bracket	Modified	1 pc/s	P 1,500.00/pc	P 1,500.00
scaffoldings	4sets	1 mtr	P 1,500.00/mtr	P 1,500.00
PVC blue	3/4" x 10'	3 pc/s	P 150.00/pc	P 450.00
				P 14,650.00

Estimated Charges

P 26,650.00

Total Estimated Charges

P 284,425.00

NOTES: DISMANTLE UNITS PRICE FOR EXISTING

1. ACU3 - 1ST FLOOR HALLWAY- 2.5HP , WALL MOUNTED - 2,500 Plus PULL-OUT 500= 3,000

2. ACU9 - 2ND FLOOR HALLWAY- 3.0HP , WALL MOUNTED - 2,500 Plus PULL-OUT 500= 3,000

Additional existing units already dismantle:for check up and install if still serviceable.

1. KSM-IW20-4F1M (ACU9)

2. KSM-IW30-4F1M (ACU8)

3. KSM-IW29AE-5G1M (ACU3)

Bring to shop to determined if still serviceable, SHOP will provide the check up and repair QUOTATION**Validity:** This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.**Installation notes:**

- 1 Location based in floor plan only. Not yet final. For confirmation of location. indoor and outdoor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit with installer before installation.
- 4 Coppertube expose in the area. Customer will cover the coppertube after installation.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios


Field Surveyor

Customer Conformer:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth ZamoraService Supervisor Shop and
Field Operation

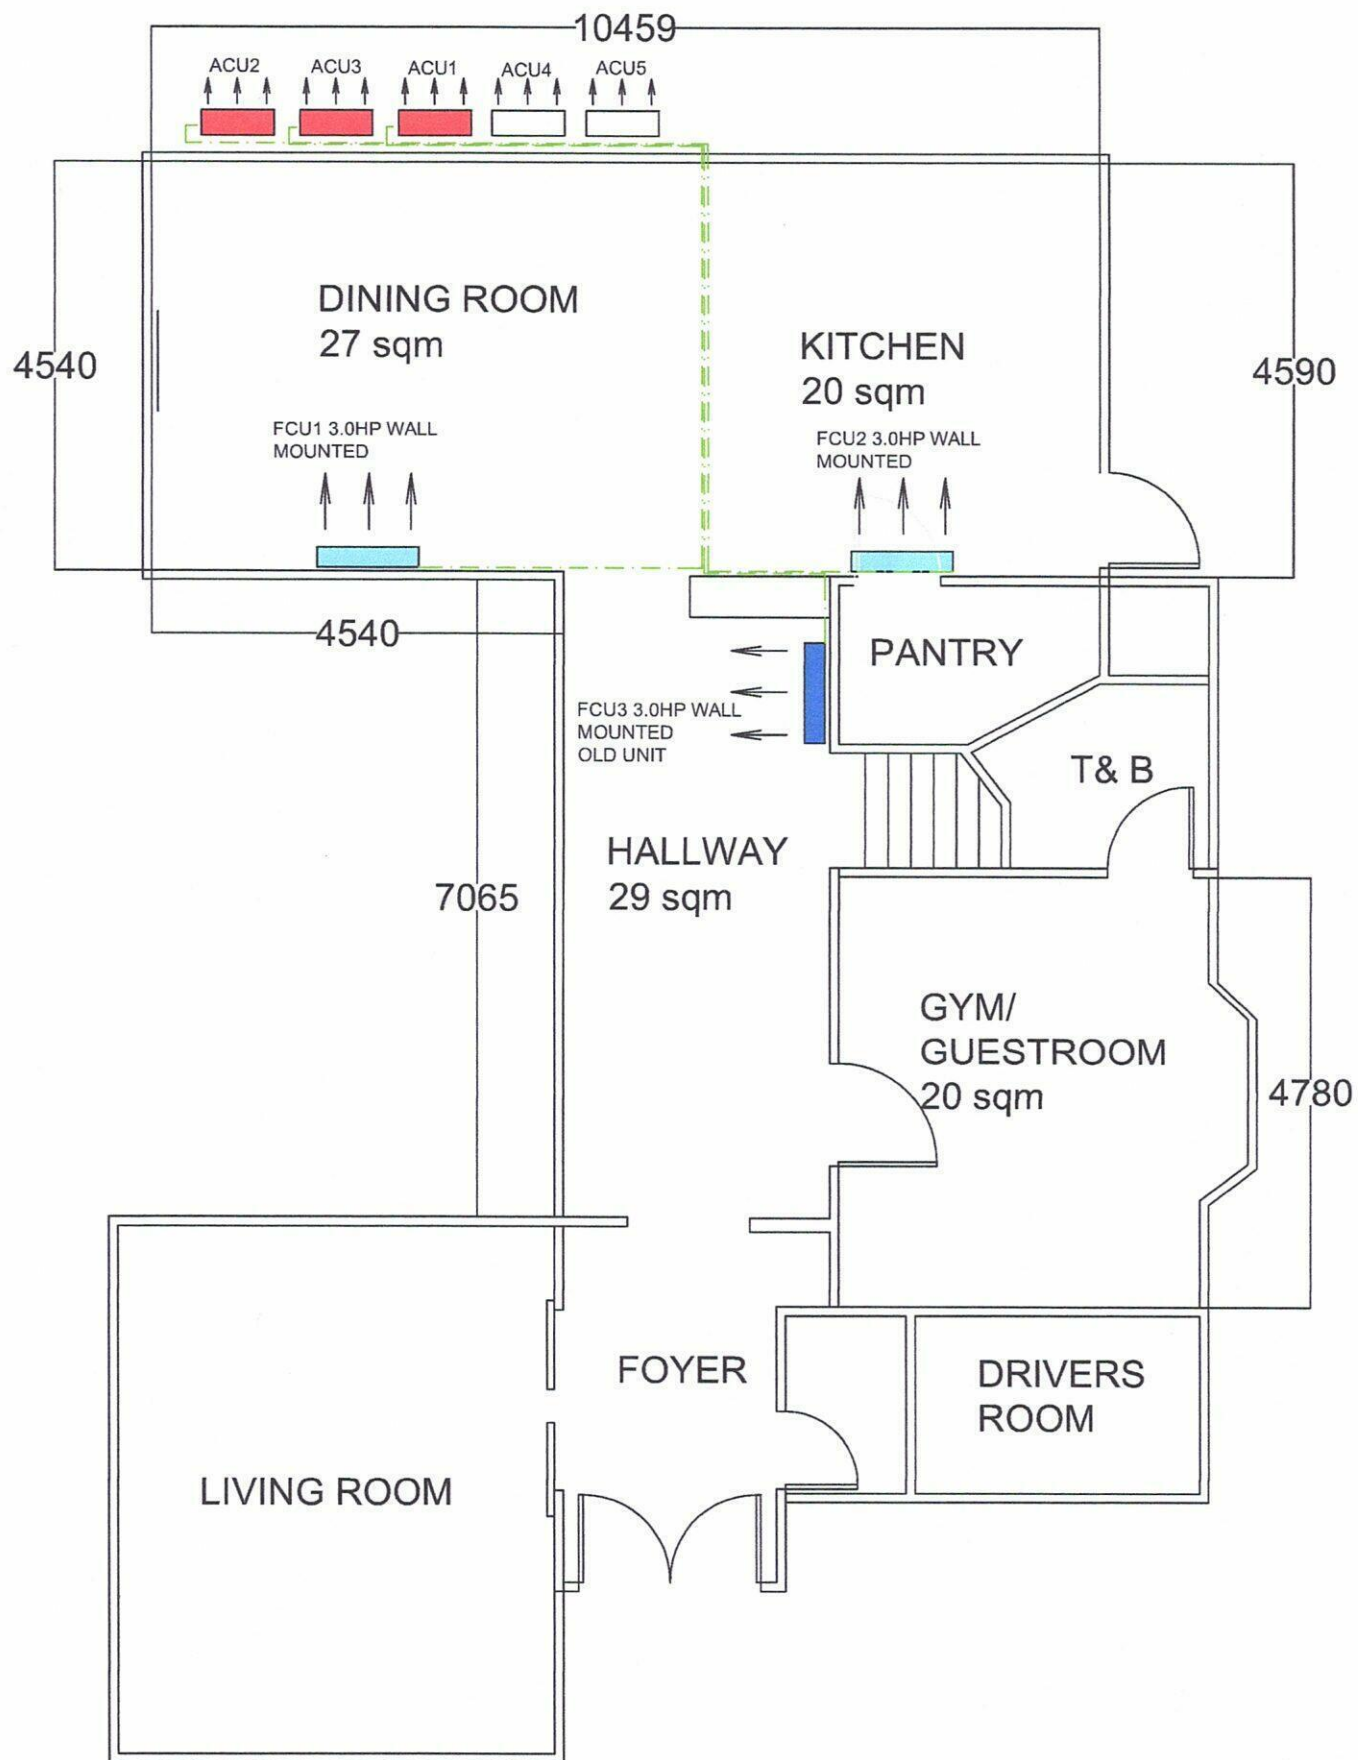

GROUND FLOOR

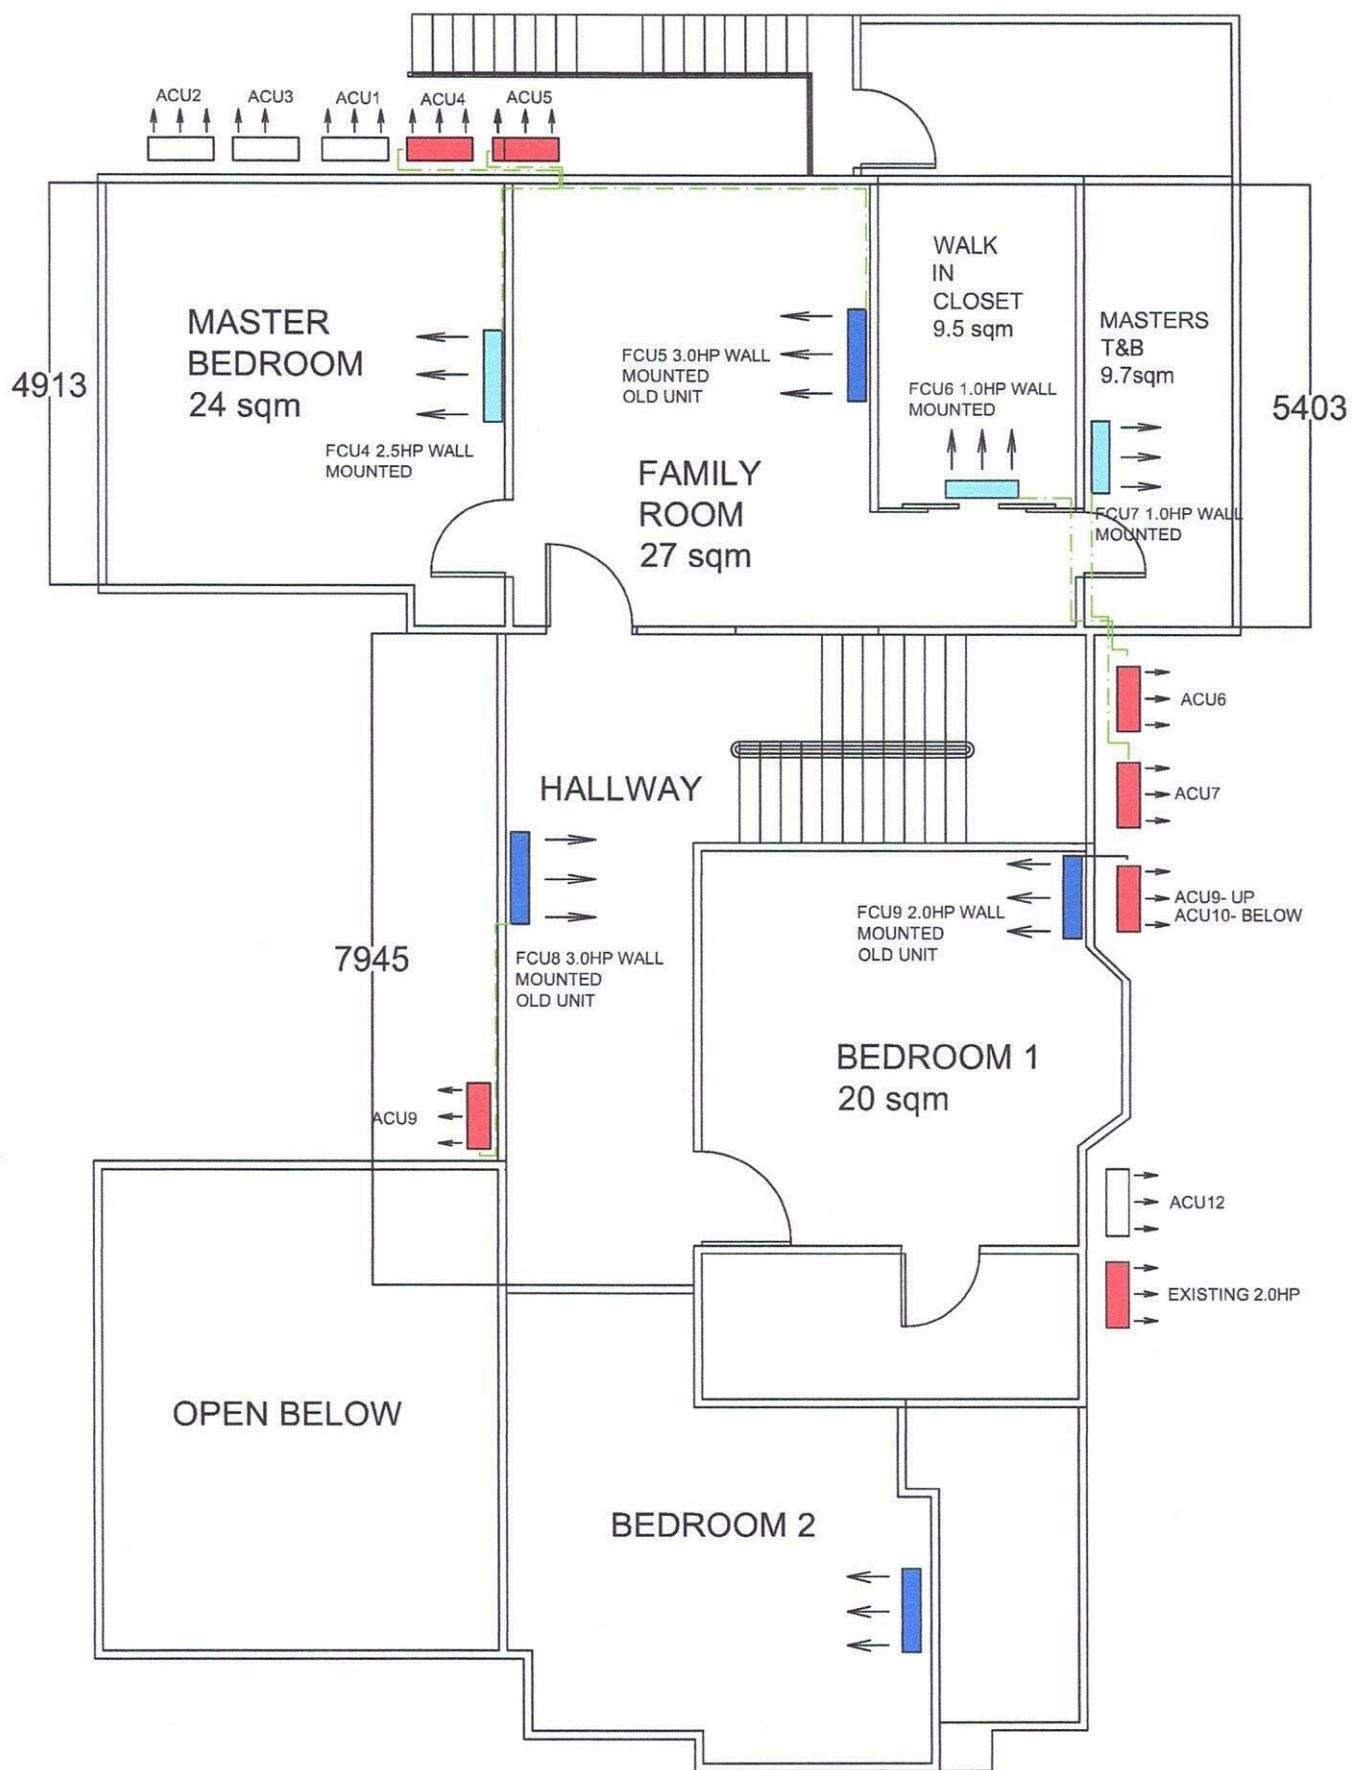

SECOND FLOOR

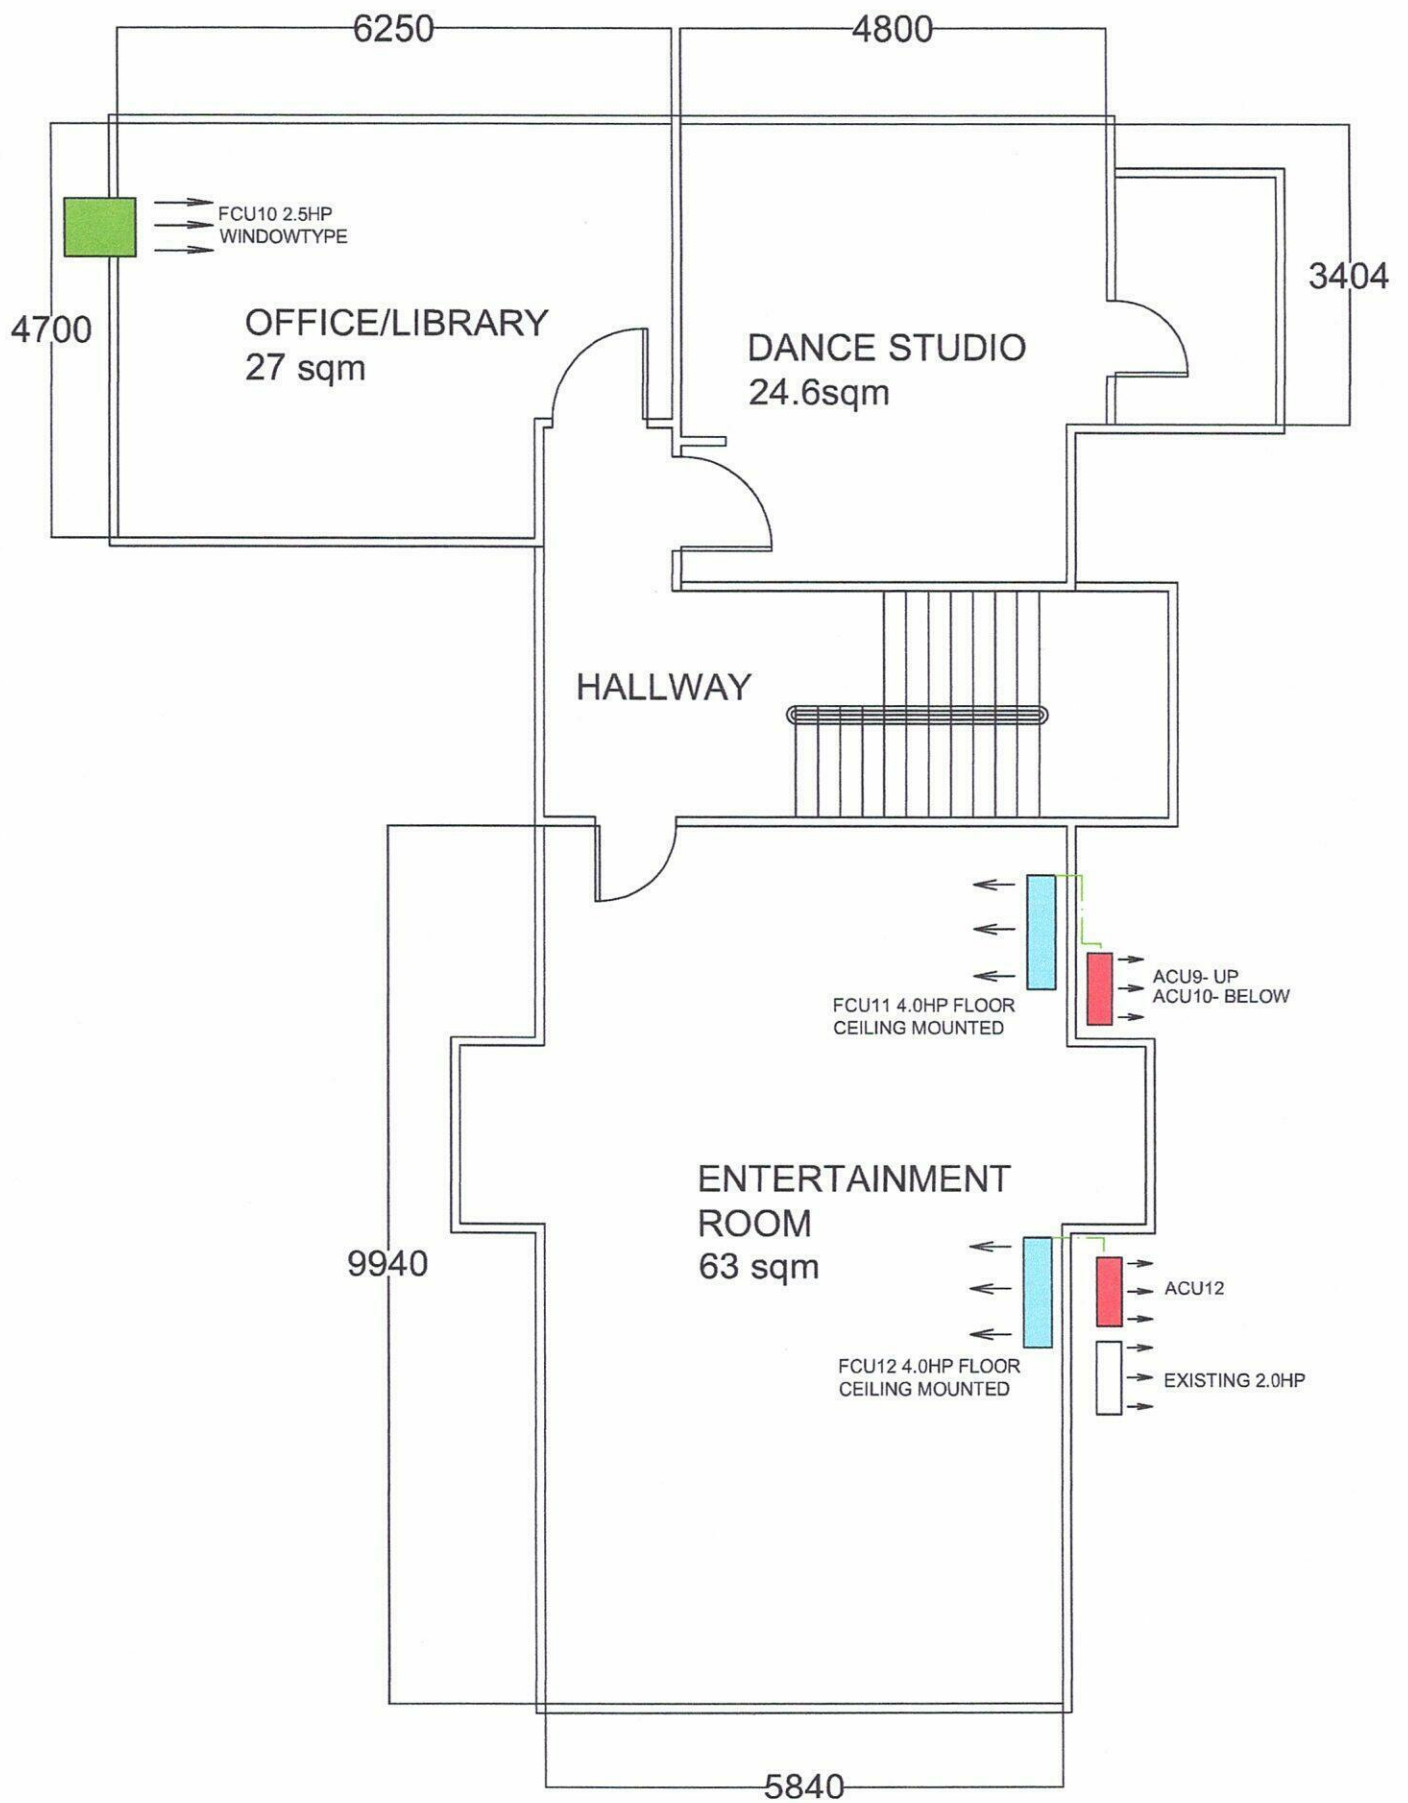

ATTIC FLOOR