



December 17, 2025

AIRLIVE

UNIT 2604 PRESTIGE TOWER, ORTIGAS JR. ORTIGAS CENTER, SANT ANTONIO, PASIG CITY

TEL#: 0916-6194331

Email: ghemano@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	112,156.20
1	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	115,516.20	PHP	115,516.20
TOTAL UNIT COST					PHP	227,672.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	111,180.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	339,452.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

**\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

\* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

\* Installation: Will be provided by assigned installer.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM  
KMI-ASSISTANT

Noted By:

MART NATHANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES  
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-12-25-0839  
MIS-24%/6.5K/7K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



December 16, 2025

Airlive

Unit 2604 Prestige Tower, Ortigas Jr. Ortigas Center San Antonio, Pasig City

0916-6194331

[ghemanalo@gmail.com](mailto:ghemanalo@gmail.com)

MODEL	Qty
KL-IF60-G6HIM32	1
KLM-IC60-AA1M32-I	1

OFFICE	Area	148 sqm
--------	------	---------

**ACU 1 6.0 HP Floor Ceiling Inverter**

**KLM- IC60-AA1M32-I**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

**Initial Charge**

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

**Installation Materials**

Description	Qty	Price per qty	Subtotal
Copper Tube	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	47 ft	₱ 100.00/ft	₱ 4,700.00
Royal Cord (ACCU-Breaker)	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3 pc/s	₱ 150.00/pc	₱ 450.00
Metal Clamp	6 pc/s	₱ 120.00/pc	₱ 720.00
Outdoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
PVC blue	4 pc/s	₱ 150.00/pc	₱ 600.00
Drain Hose	7 ft	₱ 25.00/ft	₱ 175.00
			₱ 27,385.00

**Estimated Charges**

₱ 42,385.00

**ACU 2 6.0 HP Floor Standing Inverter**

**KL-IF60-G6HIM32**

Estimated Pipe Length = 85 ft

Estimated Royal Cord Length = 92 ft

**Initial Charge**

₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)


Consumables

**Installation Materials**

Description	Qty	Price per qty	Subtotal
Copper Tube	75 ft	₱ 400.00/ft	₱ 30,000.00
Royal Cord (comm. wire)	82 ft	₱ 100.00/ft	₱ 8,200.00
Royal Cord (ACCU-Breaker)	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
Rubber Insulation	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Full thread	4 pc/s	₱ 150.00/pc	₱ 600.00
Metal Clamp	14 pc/s	₱ 120.00/pc	₱ 1,680.00
Outdoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
PVC blue	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	7 ft	₱ 25.00/ft	₱ 175.00
			₱ 49,795.00

**Estimated Charges**

₱ 63,795.00

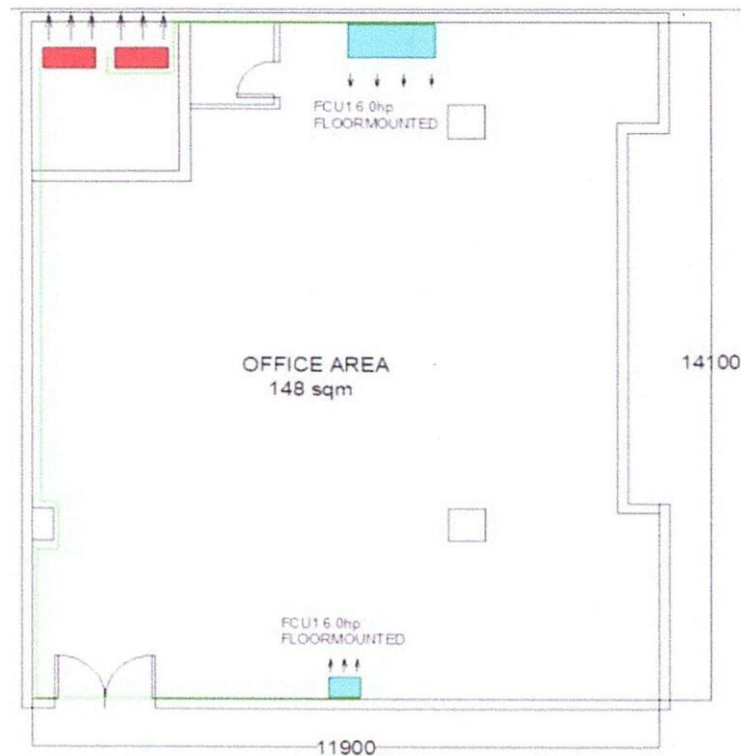

Additional labor for Night Schedule

P 5,000.00

**Total Estimated Charges**

**P 111,180.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Installation notes:**

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Coppertube expose inside the area.
- 5 Need to operate at the sme time to avoid undercapacity.
- 6 **Working days: Saturday and Sunday 6am onwards with parking.Need working permit. Bring bolts and nuts And extra Angle Bar with grinder for the footings of Outdoor Units.**
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 10 **Final charges will be based on actual installation.**

Prepared by:

**Jeffrey Dadios**

Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:

**Engr. Kenneth Zamora**