



January 8, 2025

MR. JAMES KEVIN PANTANGCO
2306A TOWER F, THE GROVE BY ROCKWELL, C5 RD. BRGY. UGONG, PASIG CITY
TEL#: 0917-6371238

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-10WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	26,224.10	PHP	26,224.10
TOTAL UNIT COST					PHP	26,224.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	11,975.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	38,799.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

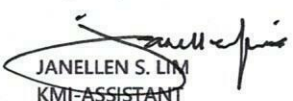
JANELLE S. LIM
KMI-ASSISTANT

Noted by;

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-01-25-0015
REG-22%/7K

Conforme: _____
SIGNATURE OVER PRINTED NAME



KOLIN Philippines International Inc.
Survey Form

Nº 003570

Customer Name : JAMES KEVIN PANTANCO Date : 1-7-21
 Address : 2206 TOWER E THE GROVE ISY BULACAN SJR No. : 236761
 Establishment Type : Residential ☒ Area Surveyed : BRD Room
 Commercial ☐ Area Surveyed : _____

Recommended Product Model : KSC TWF 10WFL 5 KWH72

Cooling Capacity Computation

Floor Area : _____ sqm.
 Ceiling Height : _____ mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area : 2 x 550 Btu/h 1100 Btu/h
 Ceiling Height (excess of 3 mtrs.) : _____ x 20% _____ Btu/h
 Window Direct Sunlight _____ x 20% + 50% 270 Btu/h
 Total Cooling Capacity 1470 Btu/h

Add : Additional Heat Load

No. of Person 2 x 300 Btu/h 600 Btu/h
 No. of Ordinary Light (<40w) 4 x 200 Btu/h 800 Btu/h
 No. of Special Light (>40w) _____ x 400 Btu/h _____ Btu/h
 No. of Refrigerator (< 6 cu.ft.) _____ x 400 Btu/h _____ Btu/h
 No. of Refrigerator (> 6 cu.ft.) _____ x 800 Btu/h _____ Btu/h
 No. of Cooking Range _____ x 1500 Btu/h _____ Btu/h
 No. of Laptop Computer _____ x 150 Btu/h _____ Btu/h
 No. of Desktop Computer 1 x 400 Btu/h 400 Btu/h
 No. of Printer _____ x 500 Btu/h _____ Btu/h
 No. of Photocopier _____ x 1000 Btu/h _____ Btu/h
 Total Cooling Capacity 2200 Btu/h

Recommended Cooling Capacity

2480 Btu/h


Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | <input type="checkbox"/> Expose | <input checked="" type="checkbox"/> Embedded |
| 2. Chipping | <input type="checkbox"/> Included | <input type="checkbox"/> Not Included |
| 3. Fabricated Bracket | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| 5. Dismantling of existing Aircon | <input type="checkbox"/> Included | <input type="checkbox"/> Not Included |
| 6. Ducting | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |

Dimension : _____

7. Plastering, carpentry and restoration works are to be done by the customer.
 8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
 9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
 10. Other concern: DISMANTLE EXISTING EXTERIOR CONDENSER. 1/4V 1/2
SWITCH. REED (PUMP) WORKER (PUMP)
WITHOUT PAINTING 1 PAX. 3-5 PAX. (EXTERIOR)
DRINKING NEED TO COVER BY 4 INCHES.
NEED 10CM FROM TOP OF UNIT TO CUP.
EXTERIOR SCORING (NOT HXFL)

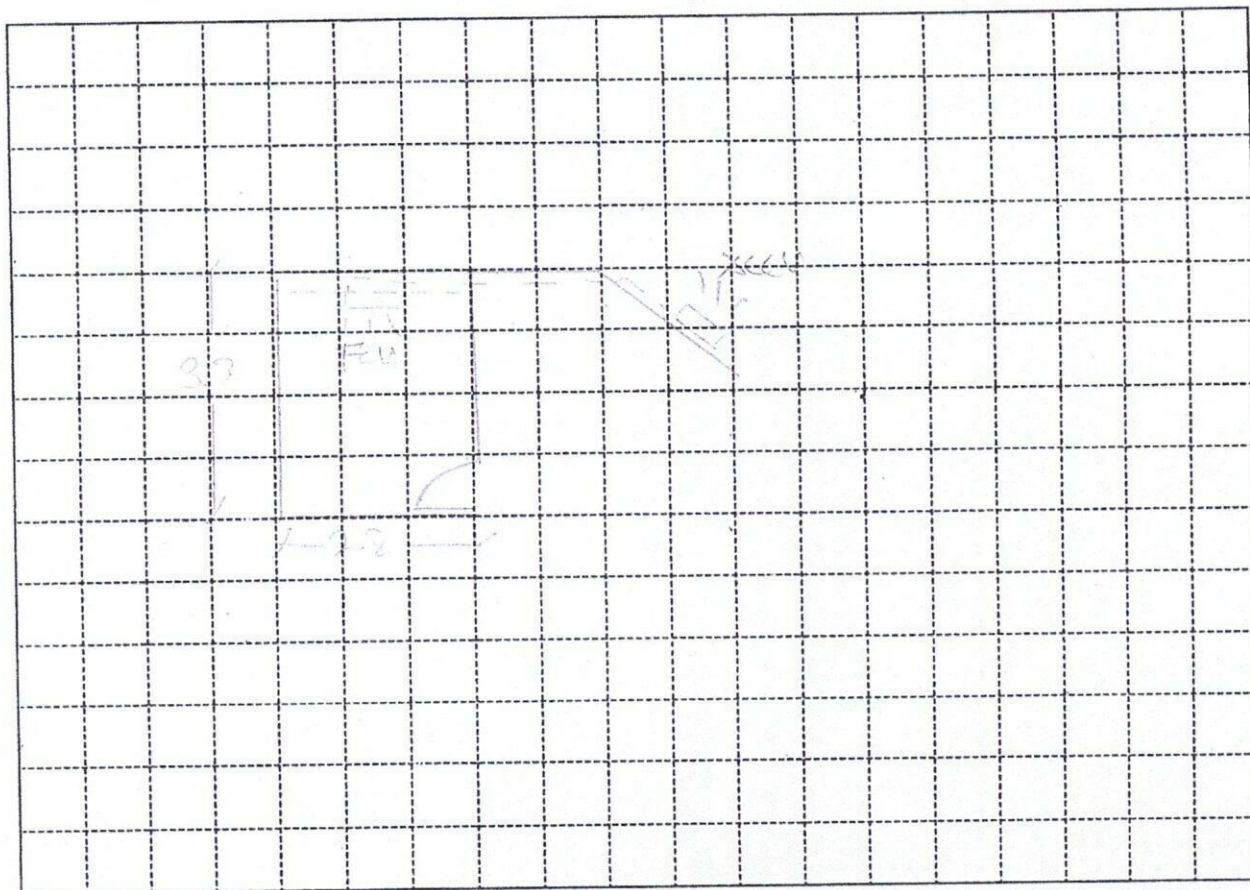

Indoor Unit Location :

CENTRE OF REAR XBOX

Outdoor Unit Location :

AT DESIGNATED OUTDOOR LOCATION, SIDE OF LIVING.

Pipe Length :

10 ft.

Special Note :

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2.0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd. / Fabricated) ; (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" , 3/4"		
PVC Pipe (electrical)	3/4" , 1"		
Drain Pump			
Drain Pump Hose		1.75	25
Chipping Works	1/4" x 3/4"	mtr.	1200
Dismantling Fee (existing air-conditioner)	1/2" x 1/2"		2500
Initial Charge			2500
TOTAL ESTIMATE			P11975-

Note :

- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
- Survey fee will be **deducted** in the installation fee.

Prepared by:

JEFFREY D. DAVIS
Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name