



June 10, 2025

MR. NESTOR MANAHAN
20 TIMOG AVE. TOYAMA BLDG. ROOM 401, 4TH FLR., BRGY. DILIMAN QUEZON CITY
TEL#: 0918-9005279

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
1	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	38,292.20
TOTAL UNIT COST					PHP	89,504.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	92,500.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	182,604.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by;

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-06-25-0460
REG-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME



June 10, 2025
Nestor Manahan
20 Timog Ave. Toyama Bldg, room 401 4th floor Brgy Diliman Quezon City
0918-9005279

MODEL	Qty
KSG-IWF-30Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	1

Managers Office	Area	16 sqm
------------------------	------	--------



ACU 1	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32			
	Estimated Pipe Length	=	92 ft		
	Estimated Royal Cord Length	=	97 ft		
	Initial Charge				₱ 6,700.00
	Includes:				Less Outdoor Bracket
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2"	82 ft	₱ 350.00/ft	₱ 28,700.00
	Royal Cord (comm. wire)	2.mm2 x 4C	87 ft	₱ 100.00/ft	₱ 8,700.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
	Outdoor bracket	Modified	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
					<u>₱ 43,350.00</u>

Estimated Charges	₱ 50,050.00
--------------------------	-------------

OFFICE	Area	38 sqm
---------------	------	--------

ACU 2	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length	=	76 ft		
	Estimated Royal Cord Length	=	81 ft		
	Initial Charge				₱ 7,700.00
	Includes:				Less Outdoor Bracket
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	66 ft	₱ 350.00/ft	₱ 23,100.00
	Royal Cord (comm. wire)	2.mm2 x 4C	71 ft	₱ 100.00/ft	₱ 7,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
	Outdoor bracket	Modified	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
					<u>₱ 34,750.00</u>

Estimated Charges	₱ 42,450.00
--------------------------	-------------

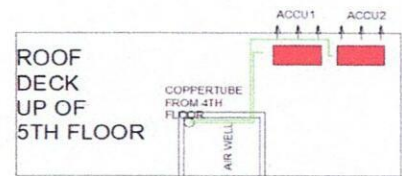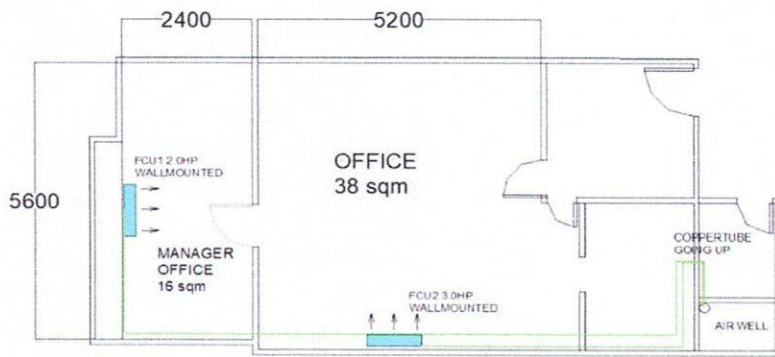

Total Estimated Charges

P 92,500.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- ✓ 4 Need waiver due to long pipelength, standard pipelength installation is 20 meters or 66 feet.
- 5 Coppertube expose inside the area.
- 6 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 10 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios

Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation