



May 2, 2025

ATTY. ARVIN SANTOS
33 ROXAS ST. XAVIERVILLE 3, BRGY. LOYOLA HEIGHTS, QUEZON CITY
TEL#: 0917-8055154

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
1	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER R-32	41,995.00	27,916.20	PHP	27,916.20
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER R-32	32,995.00	21,076.20	PHP	21,076.20
1	UNIT/S	MODEL: KSM-IW10-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) REGULAR INVERTER R-32	29,995.00	18,796.20	PHP	18,796.20
TOTAL UNIT COST					PHP	119,000.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	53,100.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	172,100.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL B. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-25-0332
REG-24%/4K/7K

Conforme:

SIGNATURE OVER PRINTED NAME



APRIL 30, 2025

ATTY ARVIN SANTOS

33 Roxas St. Xavierville 3, Brgy Iyola Heights, Quezon City

0917-8055154

Model	Qty
KSG-IWF-30Wfy-8K1M32	1
KSM-IW20-WCT10M1M32	1
KSM-IW15-WCT10M1M32	1
KSM-IW10-WCT10M1M32	1

BEDROOM1	Area = 13.4 sq.m
-----------------	------------------

ACU 1	1.5hp Wallmounted Inverter	KSM-IW15-WCT10M1M32				
	Estimated Pipe Length :	20	ft			
	Estimated Royal Cord Length :	25	ft			
	Initial Charge				P	7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	3/8"x 1/4"	10 ft	P 350.00 / ft	P	3,500.00
	Royal Cord	2.mm2 x 4C	15 ft	P 100.00 / ft	P	1,500.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P	300.00
	Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	PVC(Drainline)	Blue-3/4"	3 pc(s)	P 150.00 / pc	P	450.00
					P	6,750.00

Estimated Charges	P 14,250.00
--------------------------	--------------------

BEDROOM2	Area = 11 sq.m
-----------------	----------------

ACU 2	1.0hp Wallmounted Inverter	KSM-IW10-WCT10M1M32				
	Estimated Pipe Length :	30	ft			
	Estimated Royal Cord Length :	35	ft			
	Initial Charge				P	7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	3/8"x 1/4"	20 ft	P 350.00 / ft	P	7,000.00
	Royal Cord	2.mm2 x 4C	25 ft	P 100.00 / ft	P	2,500.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P	300.00
	Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	PVC(Drainline)	Blue-3/4"	3 pc(s)	P 150.00 / pc	P	450.00
					P	11,250.00

Estimated Charges	P 18,750.00
--------------------------	--------------------

FAMILY ROOM	Area = 31 sq.m
--------------------	----------------

ACU 3	3.0hp Wallmounted Inverter	KSG-IWF-30Wfy-8K1M32				
	Estimated Pipe Length :	10	ft			
	Estimated Royal Cord Length :	15	ft			
	Initial Charge				P	8,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Royal Cord	2.mm2 x 4C	5 ft	P 100.00 / ft	P	500.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P	300.00
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	PVC(Drainline)	Blue-3/4"	2 pc(s)	P 150.00 / pc	P	300.00
					P	2,100.00

Estimated Charges	P 10,600.00
--------------------------	--------------------

BEDROOM3	Area ≈ 19 sq.m
-----------------	----------------


ACU 4 2.0hp Wallmounted Inverter *KSM-IW20-WCT10M1M32*
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 15 ft
 Initial Charge P 7,500.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (wall)
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	5 ft P	100.00 / ft	P 500.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft P	60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s) P	1,000.00 / pc	P 1,000.00
PVC(Drainline)	Blue-3/4"	1 pc(s) P	150.00 / pc	P 150.00
				P 2,000.00

Estimated Charges	P 9,500.00
--------------------------	------------

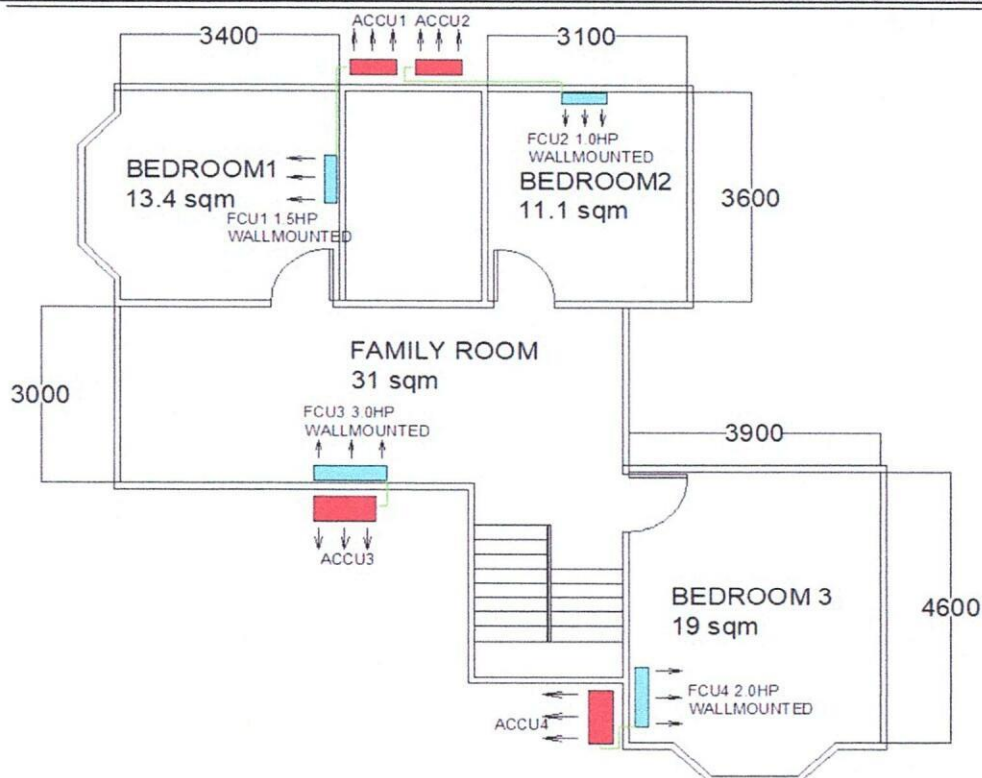

Total Estimated Charges	P 53,100.00
--------------------------------	-------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor units were agreed by the customer and Kolin's surveyor. Outdoor is recommendation only, for confirmation.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Customer need to provide power supply at the outdoor location/breaker each units.
- 4 Coppertube, wires and drainline expose in the area.
- 5 Need for site visit and meeting with installer for final location and markings of area, drainline and coppertube lay out.
- 6 Working days: Monday to Saturday, 8am 5pm with parking.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) 220v/ 60hz/ 1ph , is not included in the scope of work of Kolin.
- 10 Final charges will be based on actual installation.

Prepared by:

Jeoffrey Dadios
 Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
 Service Supervisor
 Field and Shop Operation