

MR. EFREN CHUA YAP
33 MARIA CLARA ST., BRGY. SAN ISIDRO, QUEZON CITY

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - UNIT A

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KVM-40VAH1M-O KOLIN VERSAMATCH SERIES AIRCONDITIONER 37,980 kJ/h (4.0HP) OUTDOOR UNIT INVERTER R32	79,995.00	59,196.30	PHP	59,196.30
2	UNIT/S	MODEL: KVM-20IWAH-I KOLIN VERSAMATCH SERIES AIRCONDITIONER INVERTER 18,990 kJ/h (2.0HP) WALL MOUNTED INDOOR UNIT R32	15,995.00	11,836.30	PHP	23,672.60
2	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 kJ/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	37,100.30	PHP	74,200.60
1	UNIT/S	MODEL: KAG-200WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 19,080 kJ/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x28"x17"	43,595.00	30,460.30	PHP	30,460.30
4	UNIT/S	MODEL: KAG-145WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 13,210 kJ/h (1.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 22"x28"x15"	32,995.00	23,116.30	PHP	92,465.20
1	UNIT/S	MODEL: KAG-100WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 10,200 kJ/h (1.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 18"x25"x14"	28,995.00	20,156.30	PHP	20,156.30
TOTAL UNIT COST					PHP	300,151.30
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	125,595.00
TOTAL UNIT COST					PHP	425,746.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR VERSAMATCH: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MARTIN MATTHEW R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-09-25-0713
BOD-26%/7K/1.8K/1.3K

Conforme: _____
SIGNATURE OVER PRINTED NAME



SEPTEMBER 22, 2025
 EFREN CHUA YAP
 33 MARIA CLARA ST. BRGY. SAN ISIDRO QUEZON CITY

MODEL	Qty
KVM-40VAH1M-O	1
KVM-20IWAH-I	2
KSG-IWF-20WFFY8K1M32	2
KAG-200WCINV	1
KAG-145WCINV	4
KAG-100WCINV	1

UNIT A

LIVING/DINING AND KITCHEN	Area	47.175 sqm
---------------------------	------	------------

ACU 1	4.0 hp Versamatch	KVM-40VAH1M-O
	Consumables	
	Installation Materials	Description Qty Price per qty Subtotal
	Royal Cord (ACCU-Breaker)	5.5mm x 3c 5 ft ₱ 70.00/ft ₱ 350.00
	Circuit Breaker waterproof	40 A/ 1PH 1 pc/s ₱ 1,000.00/pc ₱ 1,000.00
	Outdoor bracket	Galvanize wall large 1 pc/s ₱ 1,650.00/pc ₱ 1,650.00
	Drain Hose	White -1/2" 7 ft ₱ 25.00/ft ₱ 175.00
		₱ 3,175.00

FCU A	2.0 HP Wall Mounted Inverter	KVM-20IWAH-I
	Estimated Pipe Length =	66 ft
	Estimated Royal Cord Length =	71 ft
	Initial Charge	₱ 8,500.00
	Includes:	
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
	Installation Materials	Description Qty Price per qty Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2" 56 ft ₱ 350.00/ft ₱ 19,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C 61 ft ₱ 100.00/ft ₱ 6,100.00
	Rubber Insulation	2 1/8" x 3/4" x 6' 8 pc/s ₱ 350.00/pc ₱ 2,800.00
	Full thread	3/8" x 10' 2 pc/s ₱ 150.00/pc ₱ 300.00
	Metal Clamp	3" 14 pc/s ₱ 120.00/pc ₱ 1,680.00
	Drain Hose	White -1/2" 7 ft ₱ 25.00/ft ₱ 175.00
		₱ 30,655.00

FCU B	2.0 HP Wall Mounted Inverter	KVM-20IWAH-I
	Estimated Pipe Length =	53 ft
	Estimated Royal Cord Length =	58 ft
	Initial Charge	₱ 8,500.00
	Labor	
	10ft Copper Tube	
	10ft Royal Cord	
	Consumables	
	Installation Materials	Description Qty Price per qty Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2" 43 ft ₱ 350.00/ft ₱ 15,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C 48 ft ₱ 100.00/ft ₱ 4,800.00
	Rubber Insulation	2 1/8" x 3/4" x 6' 6 pc/s ₱ 350.00/pc ₱ 2,100.00
	Full thread	3/8" x 10' 2 pc/s ₱ 150.00/pc ₱ 300.00
	Metal Clamp	3" 12 pc/s ₱ 120.00/pc ₱ 1,440.00
	Drain Hose	White -1/2" 7 ft ₱ 25.00/ft ₱ 175.00
		₱ 23,865.00

Estimated Charges for ACU1	₱ 74,695.00
----------------------------	-------------

MASTER BEDROOM					Area	18 sqm
ACU 2	2.0 HP Window type Inverter	KAG-200WCINV				
	Initial Charge					₱ 1,200.00
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00	₱ 450.00
Estimated Charges						₱ 1,650.00
BED ROOM 1					Area	11.497 sqm
ACU 3	1.5 HP Window type Inverter	KAG-145WCINV				
	Initial Charge					₱ 1,200.00
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00	₱ 450.00
Estimated Charges						₱ 1,650.00
BED ROOM 2					Area	14.325 sqm
ACU 4	1.5 HP Window type Inverter	KAG-145WCINV				
	Initial Charge					₱ 1,200.00
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00	₱ 450.00
Estimated Charges						₱ 1,650.00
FAMILY ROOM					Area	16.92 sqm
ACU 5	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32				
	Estimated Pipe Length = 33 ft					
	Estimated Royal Cord Length = 38 ft					
	Initial Charge					₱ 7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (Wall)					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 1/4" x Ø 1/2"	23 ft	₱ 350.00/ft	₱ 8,050.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	₱ 100.00/ft	₱ 2,800.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
	Circuit Breaker waterproof	20A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00	₱ 12,325.00
Estimated Charges						₱ 19,825.00
GUEST ROOM					Area	14.325 sqm
ACU 6	1.5 HP Window type Inverter	KAG-145WCINV				
	Initial Charge					₱ 1,200.00
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00	₱ 450.00
Estimated Charges						₱ 1,650.00
SPARE ROOM					Area	11.497 sqm
ACU 7	1.5 HP Window type Inverter	KAG-145WCINV				
	Initial Charge					₱ 1,200.00
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00	₱ 450.00
Estimated Charges						₱ 1,650.00

LOUNGE	Area	16.92 sqm
---------------	------	-----------

ACU 8 2.0 HP Wall Mounted Inverter *KSG-IWF-20Wfy8K1M32*

Estimated Pipe Length = 36 ft

Estimated Royal Cord Length = 41 ft

Initial Charge ₱ 7,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	26 ft	₱ 350.00/ft	₱ 9,100.00
Royal Cord (comm. wire)	2.0mm ² x 4C	31 ft	₱ 100.00/ft	₱ 3,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 13,675.00

Estimated Charges	₱ 21,175.00
--------------------------	--------------------

LEISURE ROOM	Area	7.9 sqm
---------------------	------	---------

ACU 9 1.0 HP Window type Inverter *KAG-100WCINV*

Initial Charge ₱ 1,200.00

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Window Bracket	Angle Bracket	1 pc/s	₱ 450.00/pc	₱ 450.00

Estimated Charges	₱ 1,650.00
--------------------------	-------------------

Total Estimated Charges	₱ 125,595.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 Need for site visit, expose copper tube in the area.
- 4 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 5 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 6 Final charges will be based on actual installation.

Prepared by:

Customer Conformer:

Jeffrey T. Dadios


Field Surveyor

Signature Over Printed Name


Reviewed by:

Engr. Kenneth Zamora


Service Supervisor Shop and Field
Operation

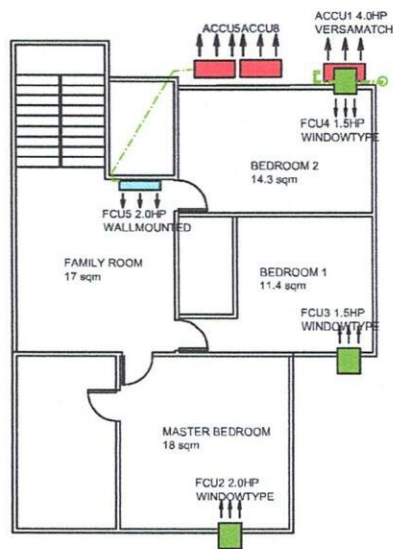

SECOND FLOOR

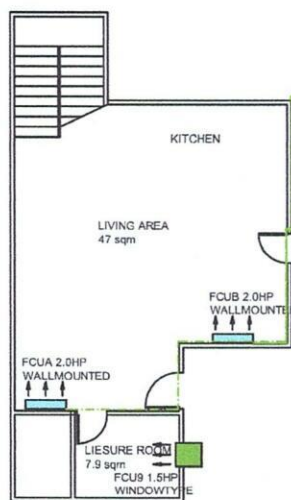

GROUND FLOOR

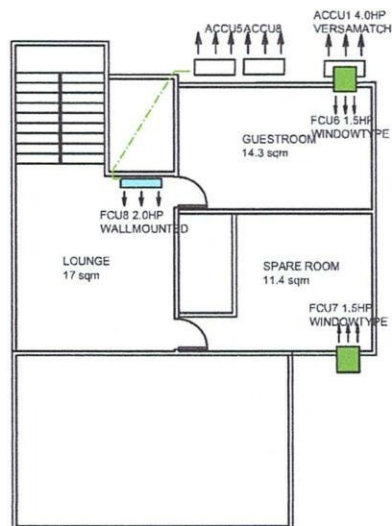

THIRD FLOOR