

April 30, 2025

METROPOLITAN MEDICAL CENTER 1357 G. MASANGKAY ST., BRGY. TONDO MANILA TEL#: 0977-8029411

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

** BLOOD BANK

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED	T	AMOUNT
2	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	33,996.20	РНР	67,992.40
TOTAL	UNIT COST				PHP	67,992.40
ESTIMA	TED COST O	(please see attached)			PHP	28,240.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	96,832.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

ANELLEN & LIM KMI-ASSISTANT

Noted by:

MART MATHANIELR. FLORES

KMI-SUPERVISOR

KMI-QUOTE-04-25-0325 REG-24%/4K

Approved By

MS. EDITHA M. FLORES

- FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792 www.kolinphil.com.ph / kolinphilippines



APRIL 29, 2025


METROPOLITAN MEDICAL CENTER

1357-G Masangkay St. Brgy Tondo, Metro Manila

0977-8029411

Model Qty KSM-IW25-WCT10M1M32

BLOOD	BANK							Area	*	20 sq.m
ACU 1	2.5hp Wallmounted Inverter KS				KSM-IW25-WCT10M1M32					
	Estimated Pipe Length :	14	ft							
	Estimated Royal Cord Length:	19	ft							
	Initial Charge								P	7,700.00
	Includes:									Less Outdoor
	Labor									Bracket
	10ft Copper Tube									Diacket
	10ft Royal Cord									
	Other Consumables									
	Additional Charges	Description		Unit		Price Per Unit		Subtotal		
	Copper Tube	1/4"x 1/2"		4 ft	P	400.00 / ft	P	1,600.00		
	Royal Cord	2.mm2 x 4C		9 ft	P	100.00 / ft	P	900.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C		7 ft	P	60.00 / ft	P	420.00		
	Circuit Breaker(NEMA)	30A/ 1Ph		1 pc(s)	P	1,000.00 / pc	P	1,000.00		
	Outdoor Bracket(floor)special	fabricated		1 pc(s)	P	2,500.00 / pc	Р	2,500.00	P	6,420.00
	Estimated Charges								P	14,120.00
ACU 2	2.5hp Wallmounted Inverter			KSM-IW25-WCT10M1M32						
	Estimated Pipe Length :	14	ft							
	Estimated Royal Cord Length:	19	ft							
	Initial Charge								P	7,700.00
	Includes:									
	Labor									Less Outdoor
	10ft Copper Tube									Bracket
	10ft Royal Cord									
	Other Consumables									
	Additional Charges	Description		Unit		Price Per Unit		Subtotal		
	Copper Tube	1/4"x 1/2"		4 ft	P	400.00 / ft	P	1,600.00		
	Royal Cord	2.mm2 x 4C		9 ft	P	100.00 / ft	P	900.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C		7 ft	P	60.00 / ft	P	420.00		
	Circuit Breaker(NEMA)	30A/ 1Ph		1 pc(s)	P	1,000.00 / pc	P	1,000.00		
	Outdoor Bracket(floor)special	fabricated		1 pc(s)	P	2,500.00 / pc	P	2,500.00	P	6,420.00

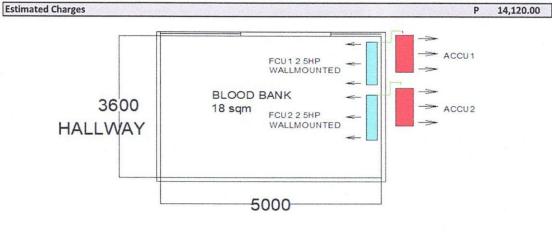

Total Estimated Charges P 28,240.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units recommendation only, for approval of customer.
- ${\bf 2}\ {\sf AC}\ drain\ line\ will\ be\ tapped\ to\ the\ nearest\ drain\ provision\ provided\ by\ the\ customer's\ contractor.$
- 3 Bring Rope and harness. Onsite fabricated outdoor Bracket location at the roof.
- 4 Outdoor bracket fabrication at roof.
- 5 Need to put or modify the window to fit the recommended unit.and put a plywood 3/4 inches. For site visit with installer.
- 7 Working days: Monday to Saturday, 8am-5pm with parking.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Electrical power supply (feeder line) 220v/60hz/1ph, is not included in the scope of work of Kolin.
- 11 Final charges will be based on actual installation.

Prepared by:	Customer Conformee:				
Jeoffrey Dadios					
Field Surveyor	Signature Over Printed Name				

Engr. Kenneth Zamora Service Supervisor Field and Shop Operation

Reviewed by: