



April 30, 2025

MR. GERALD DELA CRUZ

NORKIS BLDG. 11, CALBAYOG ST. COR. DOMINGO M. GUEVARRA ST., BRGY. HIWAY HILLS, MANDALUYONG CITY

TEL#: 0916-2135574

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	33,996.20	PHP	33,996.20
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER R-32	32,995.00	21,076.20	PHP	21,076.20
TOTAL UNIT COST					PHP	55,072.40
ESTIMATED COST OF (please see attached)					PHP	34,150.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	89,822.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART M. DANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-04-25-0320
REG-24%/4K

Conforme:


SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

 www.kolinphil.com.ph / kolinphilippines



KSM-IW25-WCT1M1M32

1


KSM-IW15-WCT10M1M32

1

rev1

CLASSROOM						Area ≈ 14 sq.m
ACU 1	1.5hp Wallmounted Inverter	KSM-IW15-WCT10M1M32				
	Estimated Pipe Length :	27	ft			
	Estimated Royal Cord Length :	32	ft			
	Initial Charge					P 6,700.00
	Includes:					
	Labor					Less Outdoor Bracket
	10ft Copper Tube					
	10ft Royal Cord					
	Other Consumables					
Additional Charges		Description	Unit	Price Per Unit		Subtotal
	Royal Cord	2.mm2 x 4C	22 ft	P	100.00 / ft	P 2,200.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P 300.00
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P 1,000.00
	PVC(Drainline)	Blue-3/4"	2 pc(s)	P	150.00 / pc	P 300.00
	Outdoor Bracket(fabricated)	wall	1 pc(s)	P	5,000.00 / pc	P 5,000.00
						P 8,800.00
Estimated Charges						P 15,500.00

PLAYGROUND						Area ≈ 31 sq.m
ACU 2	2.5hp Wallmounted Inverter	KSM-IW25-WCT10M1M32				
	Estimated Pipe Length :	27	ft			
	Estimated Royal Cord Length :	32	ft			
	Initial Charge					P 7,700.00
	Includes:					
	Labor					Less Outdoor Bracket
	10ft Copper Tube					
	10ft Royal Cord					
	Other Consumables					
Additional Charges		Description	Unit	Price Per Unit		Subtotal
	Copper Tube	3/8"x 5/8"	17 ft	P	350.00 / ft	P 5,950.00
	Royal Cord	2.mm2 x 4C	22 ft	P	100.00 / ft	P 2,200.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P 300.00
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P 1,000.00
	Outdoor Bracket(fabricated)	modification	1 pc(s)	P	1,500.00 / pc	P 1,500.00
						P 10,950.00
Estimated Charges						P 18,650.00

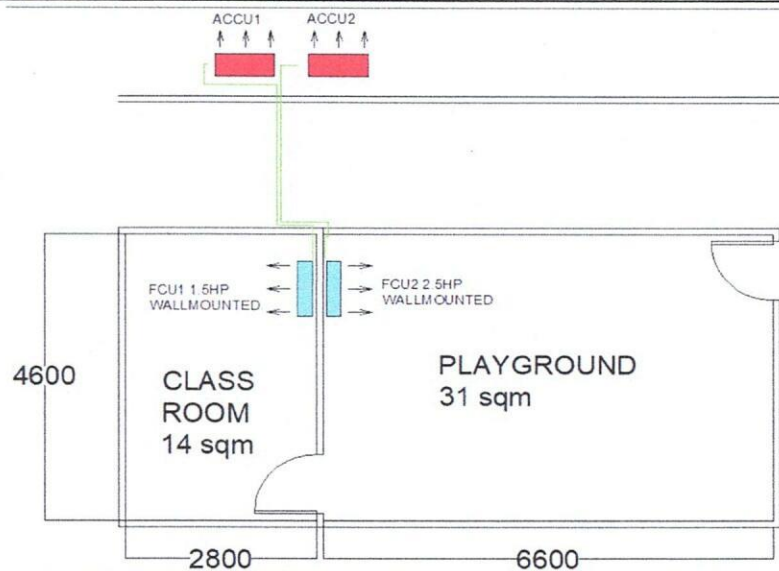

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units recommendation only, for approval of customer.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Onsite fabricated outdoor Bracket MODIFICATION, bring plywood for backing of each unit.
- 4 For site visit with installer for the final location of indoor and outdoor.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, is not included in the scope of work of Kolin.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios

Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor

Field and Shop Operation