

MR. KENDRICK CHUA
21 TAFT WEST GREENHILLS, BRGY. GREENHILLS, SAN JUAN CITY
TEL#: 0917-8190131

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - OPTION 2

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	108,836.30	PHP	217,672.60
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	76,764.30	PHP	76,764.30
1	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32	117,995.00	87,316.30	PHP	87,316.30
2	UNIT/S	MODEL: KSG-IWF-30WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30	PHP	99,360.60
2	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	32,996.30	PHP	65,992.60
3	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER W/ WIFI R-32	41,995.00	27,076.30	PHP	81,228.90
1	UNIT/S	MODEL: KA-200MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 19,800 Kj/h (2.0HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 26"x30.7"x16.8"	36,995.00	26,176.30	PHP	26,176.30
1	UNIT/S	MODEL: KA-100MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 9,700 Kj/h (1.0HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 17.7"x26.6"x13.8"	24,995.00	17,696.30	PHP	17,696.30
TOTAL UNIT COST					PHP	672,207.90
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	245,975.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	918,182.90

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MARTIN MANUEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-08-25-0612
BOD-26%/14K/7K/4K/1.2K/1K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



August 12, 2025
KENDRICK CHUA
21 Taft West Greenhills, Brgy Greenhills San Juan City
0917-8190131

MODEL	Qty
KLG-IF60-G6H1M32	2
KLG-IF40-5G1M32	1
KLM-IC40-AA1M32	1
KSG-IWF-30Wfy8K1M32	2
KSG-IWF-25Wfy8K1M32	2
KSG-IWF-20Wfy8K1M32	3
KAG-200WCINV	1
KAG-100WCINV	1

REV1

ART ROOM	Area	22.5 sqm
----------	------	----------

ACU 1	1.0 HP Window type Inverter	KAG-100WCINV			
	Initial Charge				₱ 1,200.00
	Includes:				
	Labor				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Window type bracket		1 pc/s	₱ 600.00/pc	₱ 600.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 775.00

Estimated Charges	₱ 1,975.00
-------------------	------------

GUEST/ ENTERTAINMENT ROOM	Area	32 sqm
---------------------------	------	--------

ACU 2	2.5 HP Wall Mounted Inverter	KSG-IWF-25Wfy8K1M32			
	Estimated Pipe Length = 23 ft				
	Estimated Royal Cord Length = 30 ft				
	Initial Charge				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	₱ 100.00/ft	₱ 2,000.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 8,920.00

Estimated Charges	₱ 17,420.00
-------------------	-------------

FOYER	Area	44 sqm
--------------	------	--------

ACU 6 4.0 HP Floor Standing Inverter **KLG-IF40-5G1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 57 ft

Initial Charge ₱ 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	47 ft	₱ 100.00/ft	₱ 4,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
Drain Hose	White -1/2"	5 ft	₱ 25.00/ft	₱ 125.00
				₱ 31,615.00

Estimated Charges	₱ 42,615.00
--------------------------	-------------

ELLA'S ROOM	Area	24.6 sqm
--------------------	------	----------

ACU 7 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 14 ft

Estimated Royal Cord Length = 21 ft

Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	4 ft	₱ 350.00/ft	₱ 1,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	11 ft	₱ 100.00/ft	₱ 1,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 4,220.00

Estimated Charges	₱ 11,720.00
--------------------------	-------------

PIA'S ROOM	Area	26 sqm
-------------------	------	--------

ACU 8 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 17 ft

Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,420.00

Estimated Charges	₱ 9,920.00
--------------------------	------------

KARA'S ROOM	Area	28 sqm
--------------------	------	--------

ACU 9 **2.0 HP Wall Mounted Inverter** *KSG-IWF-20Wfy8K1M32*

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 17 ft

Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,420.00

Estimated Charges	₱ 9,920.00
--------------------------	------------

HALLWAY	Area	37 sqm
----------------	------	--------

ACU 10 **3.0 HP Wall Mounted Inverter** *KSG-IWF-30Wfy8K1M32*

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 30 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	₱ 100.00/ft	₱ 2,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	5 pc/s	₱ 150.00/pc	₱ 750.00
				₱ 15,070.00

Estimated Charges	₱ 23,570.00
--------------------------	-------------

PPIMARY BEDROOM	Area	31.5 sqm
------------------------	------	----------

ACU 11 **2.5 HP Wall Mounted Inverter** *KSG-IWF-25Wfy8K1M32*

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 60 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft	₱ 400.00/ft	₱ 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	50 ft	₱ 100.00/ft	₱ 5,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 33,070.00

Estimated Charges	₱ 41,570.00
--------------------------	-------------

ART ROOM			Area	22.5 sqm
ACU 12	2.0 HP Window type Inverter	KAG-200WC/INV		
	Initial Charge			₱ 1,200.00
	Includes:			
	Labor			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Window type bracket		1 pc/s	₱ 600.00/pc
	Drain Hose	White -1/2"	5 ft	₱ 25.00/ft
				₱ 125.00
				₱ 725.00
Estimated Charges				₱ 1,925.00

ATTICK			Area	40 sqm
ACU 13	4.0HP Floor Ceiling Inverter	KLM-IC40-AA1M32		
	Estimated Pipe Length = 23 ft			
	Estimated Royal Cord Length = 30 ft			
	Initial Charge			₱ 12,000.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Copper Tube	Ø 3/8" x Ø 5/8"	13 ft	₱ 400.00/ft
	Royal Cord (comm. wire)	2.mm2 x 4C	20 ft	₱ 100.00/ft
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc
	Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc
	Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc
	Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc
	Outdoor bracket	Fab. wall w/ledge	1 pc/s	₱ 6,500.00/pc
	PVC blue	3/4" x 10'	3 pc/s	₱ 150.00/pc
				₱ 17,990.00
Estimated Charges				₱ 29,990.00
Total Estimated Charges				₱ 245,975.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan. Recommendation not yet final.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for markings of each units and site visit before installation.need to open the ceiling.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 Final charges will be based on actual installation.

Prepared by:

Jeoffrey Dadios

Field Surveyor


Customer Conformee:

Signature Over Printed Name


Reviewed by:

Engr. Kenneth Zamora


Service Supervisor Shop and
Field Operation

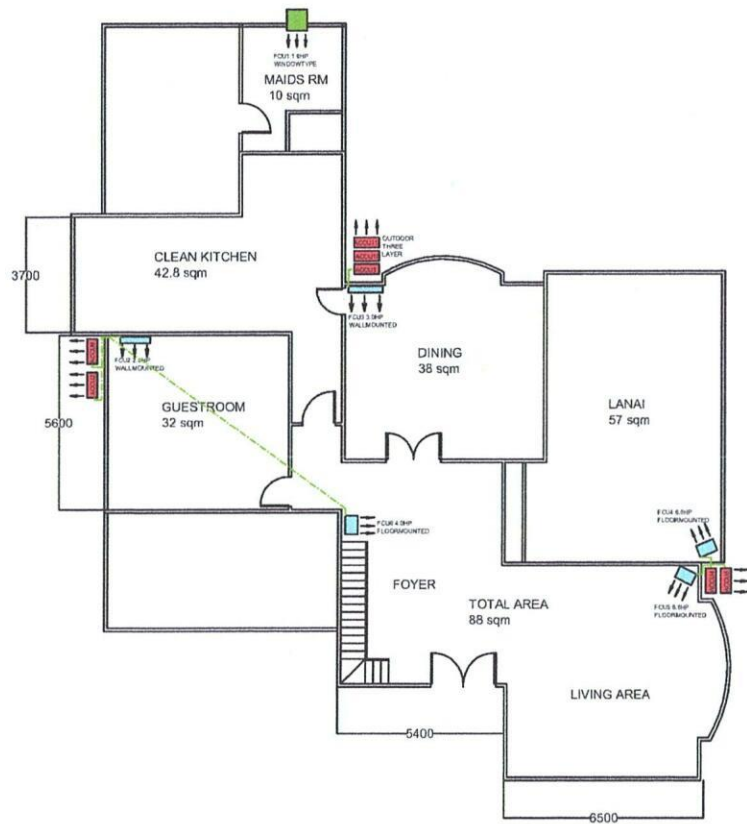

GROUND FLOOR

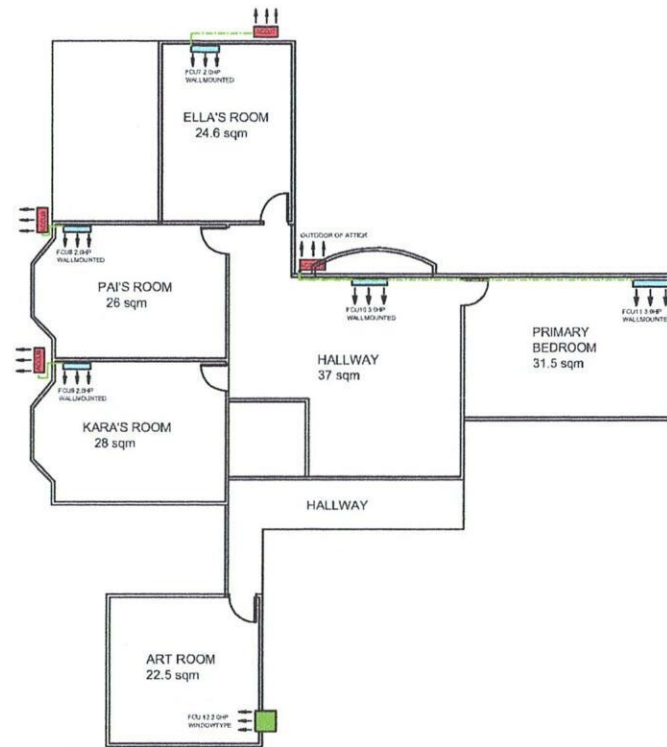

SECOND FLOOR



ATTICK